

SHANGHAI EVER INTERNATIONAL CORPORATION LIMITED

ADDRESS: ROOM 402, NO. 2, DONGXU CENTER, LANE 1933, NORTH ZHANGYANG ROAD,
PUDONG NEW AREA, 201208 (SHANGHAI) CHINA
TELEPHONE: +86 21 58660886

EMAIL: SALES@HYDGETLIGHTING.COM
WEBSITE: WWW.HYDGETLIGHTING.COM



LED Step Light Catalog 2023

GS-86
TECHNICAL
PARAMETER



Product characteristics

- Long life of LED light source, once construction, several years of use.
- Low power consumption, no need to pay high electricity charges for lighting and beautification.
- Waterproof, dustproof, pressure and corrosion resistance.



When a man comes,
the lamp lights up and he goes out



Everbright
GS-86C




GS-86G

GS-86
TECHNICAL
PARAMETER

surface color
○ ● ● ●

Power: 1.5W
CCT: 3000K-6500K
Size: 86×86×30mm
Cut Size: 80×80×50mm
(compatible with 86 standard box)

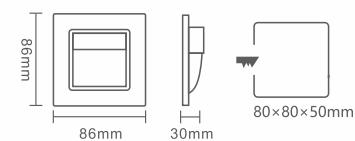

LED STEP LIGHT




GS-95
TECHNICAL
PARAMETER



Product characteristics

- Long life of LED light source, once construction, several years of use.
- Low power consumption, no need to pay high electricity charges for lighting and beautification.
- Waterproof, dustproof, pressure and corrosion resistance.



When a man comes,
the lamp lights up and he goes out



Everbright
GS-95C





GS-95G

GS-95
TECHNICAL
PARAMETER

surface color
○ ● ● ●

Power:1.5W
CCT:3000K-6500K
Size:95×95×30mm
Cut Size: 80×80mm
(compatible with 86 standard box)

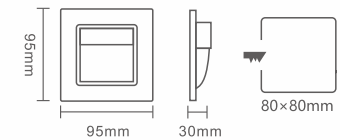


GS-P08F
TECHNICAL
PARAMETER



Product characteristics

- Long life of LED light source, once construction, several years of use.
- Low power consumption, no need to pay high electricity charges for lighting and beautification.
- Waterproof, dustproof, pressure and corrosion resistance.



When a man comes,
the lamp lights up and he goes out



Everbright
GS-A86





GS-P08FG

GS-A86/GS-P08F
TECHNICAL
PARAMETER

surface color
○ ● ●

Power: 1.5W
CCT: 3000K-6500K
Size: 86×86×30mm
Cut Size: 80×80×50mm
(compatible with 86 standard box)

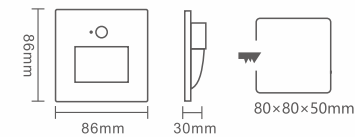


GS-P08
TECHNICAL
PARAMETER



Product characteristics

- Long life of LED light source, once construction, several years of use.
- Low power consumption, no need to pay high electricity charges for lighting and beautification.
- Waterproof, dustproof, pressure and corrosion resistance.



When a man comes,
the lamp lights up and he goes out



Everbright
GS-P08C





GS-P08G


GS-P08
TECHNICAL
PARAMETER

surface color
○ ● ● ●

Power: 1.5W
CCT: 3000K-6500K
Size: 86×86×30mm
Cut Size: 80×80×50mm
(compatible with 86 standard box)


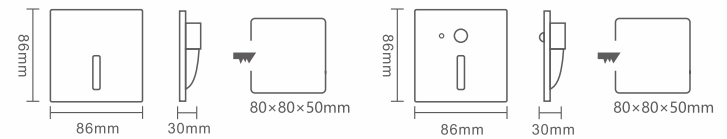


GS-AC86
TECHNICAL
PARAMETER

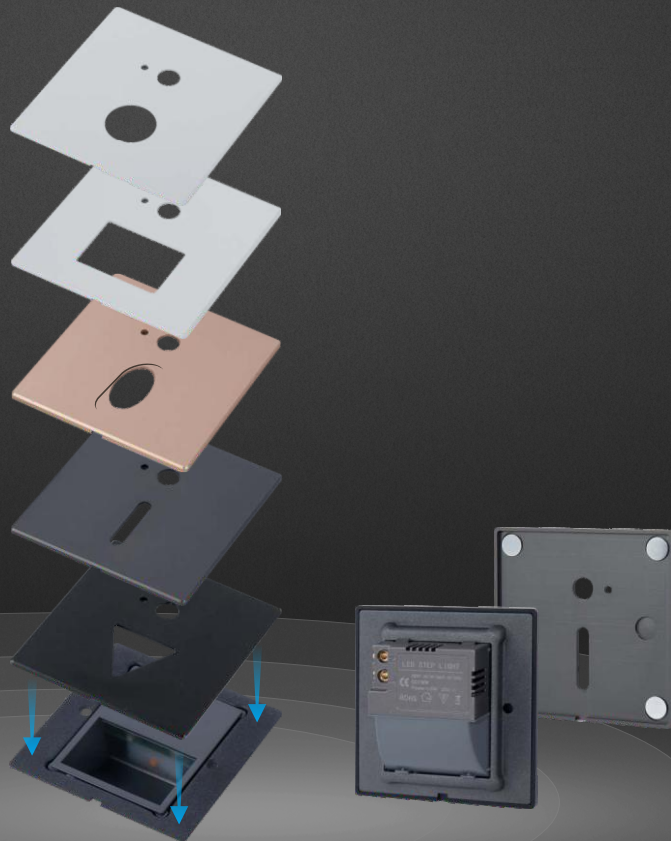

Product characteristics

- Long life of LED light source, once construction, several years of use.
- Low power consumption, no need to pay high electricity charges for lighting and beautification.
- Waterproof, dustproof, pressure and corrosion resistance.

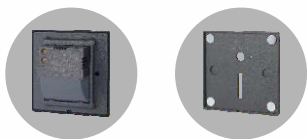

When a man comes,
the lamp lights up and he goes out



Everbright
GS-AC86C




GS-AC86G

GS-AC86
TECHNICAL
PARAMETER

surface color
○ ● ● ● ●

Power: 1.5W
CCT: 3000K-6500K
Size: 86×86×30mm
Cut Size: 80×80×50mm
(compatible with 86 standard box)

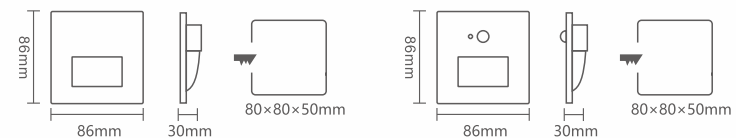



LED STEP LIGHT

GS-LV86
TECHNICAL
PARAMETER



Product characteristics

- Long life of LED light source, once construction, several years of use.
- Low power consumption, no need to pay high electricity charges for lighting and beautification.
- Waterproof, dustproof, pressure and corrosion resistance.

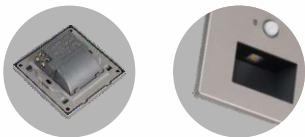

When a man comes,
the lamp lights up and he goes out



Everbright
GS-LV86C





GS-LV86G

GS-LV86
TECHNICAL
PARAMETER

surface color
○ ● ● ●

Power: 1.5W
CCT: 3000K-6500K
Size: 86×86×30mm
Cut Size: 80×80×50mm
(compatible with 86 standard box)

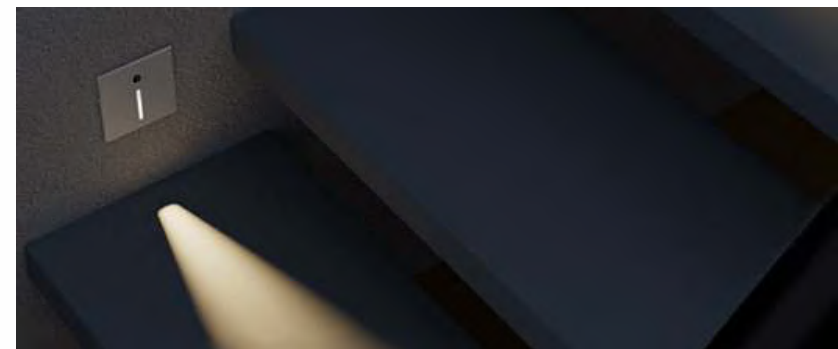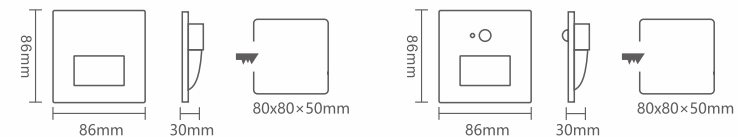


GS-C901
TECHNICAL
PARAMETER



Product characteristics

- Long life of LED light source, once construction, several years of use.
- Low power consumption, no need to pay high electricity charges for lighting and beautification.
- Waterproof, dustproof, pressure and corrosion resistance.



When a man comes,
the lamp lights up and he goes out



Everbright
GS-C901C







GS-C901G



GS-C901
TECHNICAL
PARAMETER

Power:3W
CCT:3000K-6500K
Size:90×90×52mm
Cut Size: 80×80×50mm
(compatible with 86 standard box)

surface color




GS-F020
TECHNICAL
PARAMETER



Product characteristics

- Long life of LED light source, once construction, several years of use.
- Low power consumption, no need to pay high electricity charges for lighting and beautification.
- Waterproof, dustproof, pressure and corrosion resistance.



When a man comes,
the lamp lights up and he goes out



Everbright
GS-F020C




GS-F020G



GS-F020
TECHNICAL
PARAMETER

Power:3W
CCT:3000K-6500K
Size:185×40×44mm
Cut Size: 170×33×41mm

surface color
○ ● ●


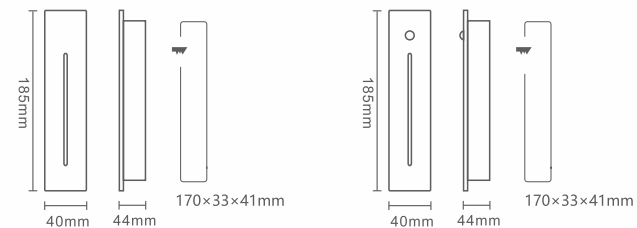


GS-AL86
TECHNICAL
PARAMETER



Product characteristics

- Long life of LED light source, once construction, several years of use.
- Low power consumption, no need to pay high electricity charges for lighting and beautification.
- Waterproof, dustproof, pressure and corrosion resistance.

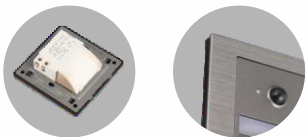

When a man comes,
the lamp lights up and he goes out



Everbright
GS-AL86C






GS-AL86G

GS-AL86
TECHNICAL
PARAMETER

surface color
● ● ●


Power:1.5W
CCT:3000K-6500K
Size:86×86×30mm
Cut Size: 80×80×50mm
(compatible with 86 standard box)

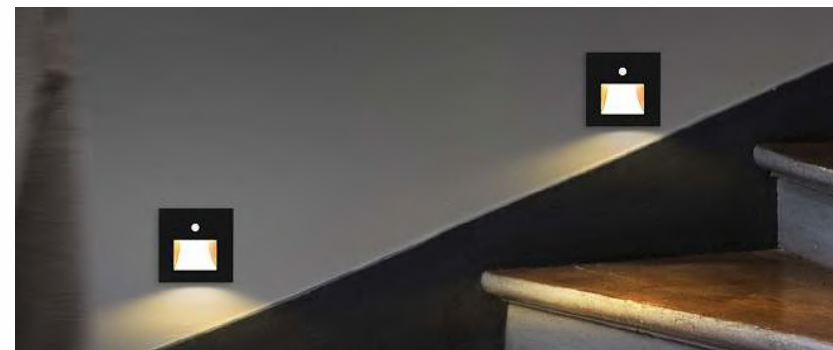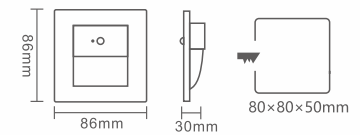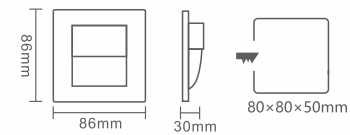

GS-T45
TECHNICAL
PARAMETER




INFRARED
BODY INDUCTION

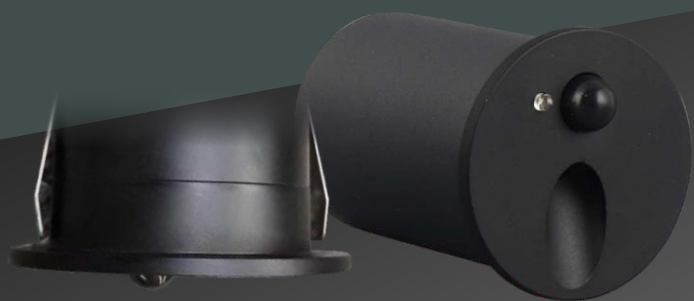

Product characteristics

- Long life of LED light source, once construction, several years of use.
- Low power consumption, no need to pay high electricity charges for lighting and beautification.
- Waterproof, dustproof, pressure and corrosion resistance.



When a man comes,
the lamp lights up and he goes out



Everbright
GS-T45YC




GS-T45YG



Everbright
GS-T45FC





GS-T45FG

GS-T45
TECHNICAL
PARAMETER

surface color
○ ● ●

Power:1W
CCT:3000K-6500K
Size:Ø45×60mm
Cut Size:Ø40×60mm

Power:1W
CCT:3000K-6500K
Size:45×45×60mm
Cut Size:Ø40×60mm

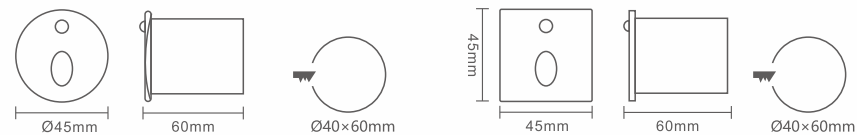

LED STEP LIGHT

GS-T65
TECHNICAL
PARAMETER




INFRARED
BODY INDUCTION



Product characteristics

- Long life of LED light source, once construction, several years of use.
- Low power consumption, no need to pay high electricity charges for lighting and beautification.
- Waterproof, dustproof, pressure and corrosion resistance.



When a man comes,
the lamp lights up and he goes out



Everbright
GS-T65YC



 GS-T65YG



Everbright
GS-T65FC




 GS-T65FG

GS-T65
TECHNICAL
PARAMETER

surface color
○ ● ●

Power: 1W
CCT: 3000K-6500K
Size: Ø65×60mm
Cut Size: Ø55×60mm

Power: 1W
CCT: 3000K-6500K
Size: 65×65×60mm
Cut Size: Ø55×60mm




LED STEP LIGHT 

GS-H08
TECHNICAL
PARAMETER



Product characteristics

- Long life of LED light source, once construction, several years of use.
 - Low power consumption, no need to pay high electricity charges for lighting and beautification.
- Waterproof, dustproof, pressure and corrosion resistance.



When a man comes,
the lamp lights up and he goes out



Everbright
GS-H08C




GS-H08G

GS-H08
TECHNICAL
PARAMETER

surface color
● ● ●

Power: 1.5W
CCT: 3000K-6500K
Size: 86×86×30mm
Cut Size: 80×80×50mm
(compatible with 86 standard box)

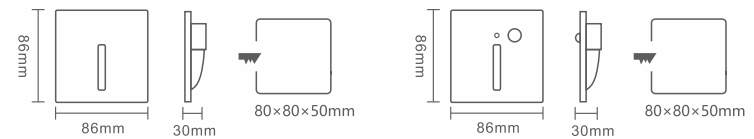


GS-W901
TECHNICAL
PARAMETER



Product characteristics

- Long life of LED light source, once construction, several years of use.
- Low power consumption, no need to pay high electricity charges for lighting and beautification.
- Waterproof, dustproof, pressure and corrosion resistance.



When a man comes,
the lamp lights up and he goes out



Everbright
GS-W901FC



GS-W901FG



Everbright
GS-W901YC




GS-W901YG

GS-W901
TECHNICAL
PARAMETER

surface color
● ● ○

Power:3W
CCT:3000K-6500K
Size:90×90×52mm/Ø87×52mm
Cut Size: 80×80×50mm/Ø80×50mm
(compatible with 86 standard box)

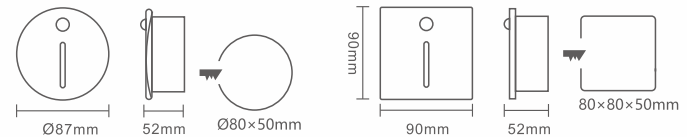



Everbright
GS-X105C



GS-X105G



Everbright
GS-X020C



GS-X020G

GS-X105

TECHNICAL
PARAMETER



surface color
○ ● ●

Power:1-3W

CCT:3000K-6500K

Size:105×40×50mm

Cut Size:87×34×50mm

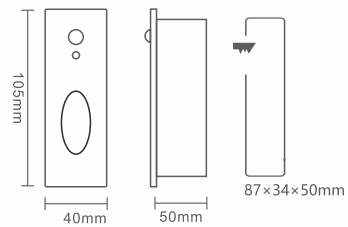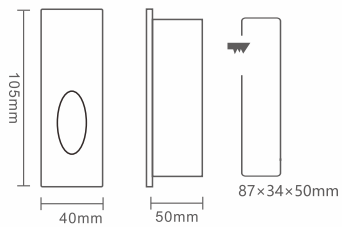

GS-X020

TECHNICAL
PARAMETER



surface color
○ ● ● ●

Power:1-3W

CCT:3000K-6500K

Size:105×40×50mm

Cut Size:87×34×50mm

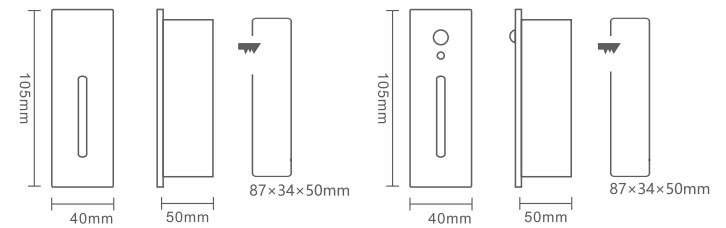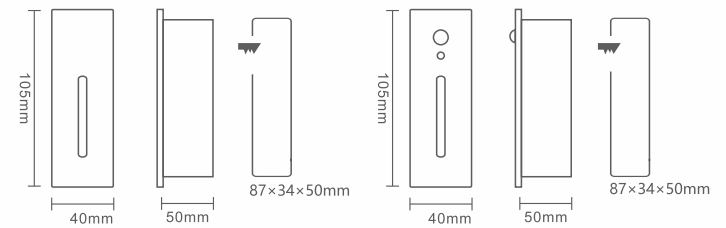


GS-W020
TECHNICAL
PARAMETER




Product characteristics

- Long life of LED light source, once construction, several years of use.
- Low power consumption, no need to pay high electricity charges for lighting and beautification.
- Waterproof, dustproof, pressure and corrosion resistance.



When a man comes,
the lamp lights up and he goes out

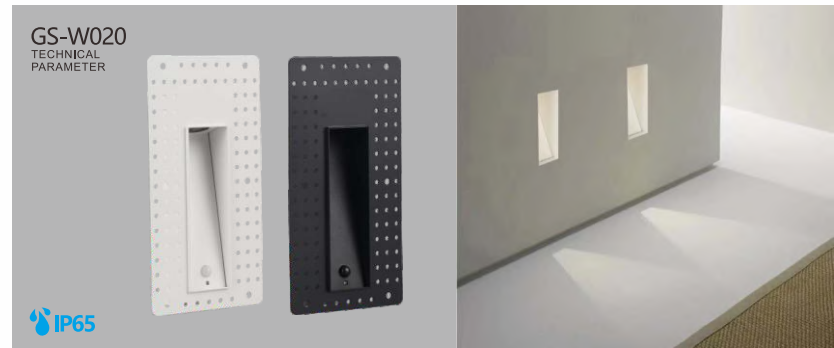

GS-W020
TECHNICAL
PARAMETER



GS-W020G




GS-W020
TECHNICAL
PARAMETER

surface color
○ ●

Power:3W
CCT:3000K-6500K
Size:200×100×48mm
Cut Size: 170×40×47mm

Power:3W
CCT:3000K-6500K
Size:145×100×48mm
Cut Size: 120×70×47mm

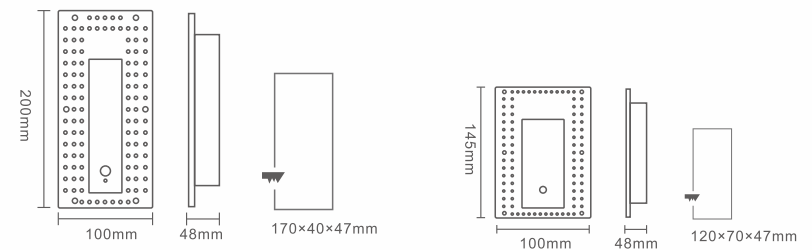

GS-W86
TECHNICAL
PARAMETER



Product characteristics


- Long life of LED light source, once construction, several years of use.
- Low power consumption, no need to pay high electricity charges for lighting and beautification.
- Waterproof, dustproof, pressure and corrosion resistance.



GS-W86
TECHNICAL
PARAMETER

Power:1W
CCT:3000K-6500K
Size:80×80×45mm
Cut Size: 80×80×50mm
(compatible with 86 standard box)

surface color
○

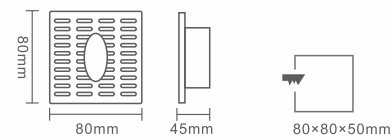

GS-A86
TECHNICAL
PARAMETER




INFRARED
BODY INDUCTION



Product characteristics

- Long life of LED light source, once construction, several years of use.
- Low power consumption, no need to pay high electricity charges for lighting and beautification.
- Waterproof, dustproof, pressure and corrosion resistance.



When a man comes,
the lamp lights up and he goes out



Everbright
GS-A86C






GS-A86G

GS-A86
TECHNICAL
PARAMETER

surface color
○ ● ● ● ●

Power: 1.5W
CCT: 3000K-6500K
Size: 86×86×30mm
Cut Size: 80×80×50mm
(compatible with 86 standard box)

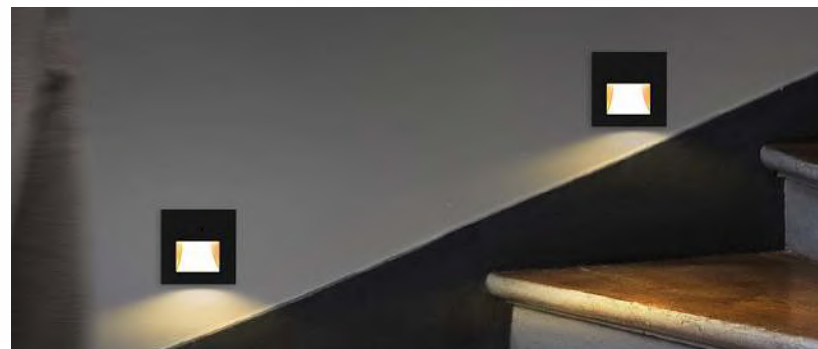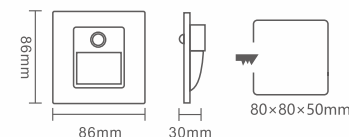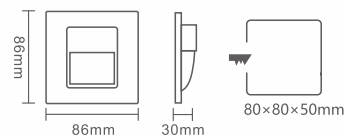

GS-CM706


TECHNICAL
PARAMETER



GS-CM706

TECHNICAL
PARAMETER

Power:1W
CCT:3000K
Size:70×60×45mm



Product characteristics

- Long life of LED light source, once construction, several years of use.
- Low power consumption, no need to pay high electricity charges for lighting and beautification.
- Waterproof, dustproof, pressure and corrosion resistance.



Steel + PC



GS-AL86
TECHNICAL
PARAMETER




Product characteristics

- Long life of LED light source, once construction, several years of use.
- Low power consumption, no need to pay high electricity charges for lighting and beautification.
- Waterproof, dustproof, pressure and corrosion resistance.



Steel + PC




When a man comes,
the lamp lights up and he goes out



GS-AL86
TECHNICAL
PARAMETER

Power:200W
CCT:3000K-6500K
Size:86×86×30mm
Cut Size: 80×80×50mm
(compatible with 86 standard box)

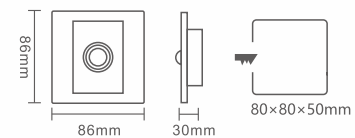

GS-F86
TECHNICAL
PARAMETER



Everbright
GS-F86C



GS-F86G



GS-F86


TECHNICAL
PARAMETER

surface color
○ ○ ● ○

Power: 1.5W
CCT: 3000K-6500K
Size: 86×86×30mm
Cut Size: 80×80×50mm
(compatible with 86 standard box)



Product characteristics

- Long life of LED light source, once construction, several years of use.
- Low power consumption, no need to pay high electricity charges for lighting and beautification.
- Waterproof, dustproof, pressure and corrosion resistance.



When a man comes,
the lamp lights up and he goes out

30s

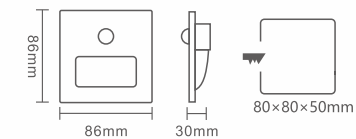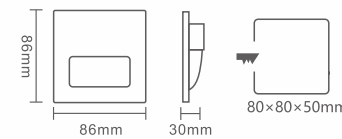



Product characteristics

- Long life of LED light source, once construction, several years of use.
- Low power consumption, no need to pay high electricity charges for lighting and beautification.
- Waterproof, dustproof, pressure and corrosion resistance.




GS-118


TECHNICAL
PARAMETER

surface color

Power: 1.5W
 CCT: 3000K-6500K
 Size: 118×75×30mm
 Cut Size: 108×68×55mm
 (compatible with 118-2 standard box)

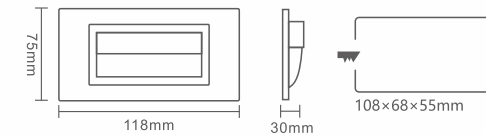


GS-004
TECHNICAL
PARAMETER

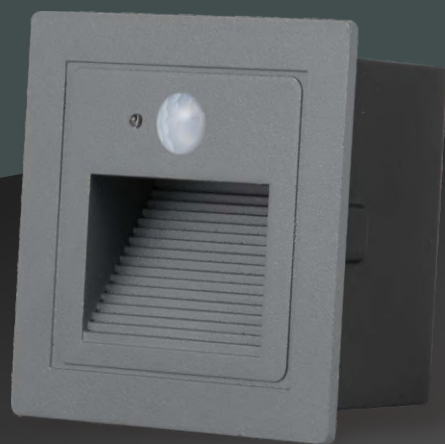

Product characteristics

- Long life of LED light source, once construction, several years of use.
- Low power consumption, no need to pay high electricity charges for lighting and beautification.
- Waterproof, dustproof, pressure and corrosion resistance.



When a man comes,
the lamp lights up and he goes out



Everbright
GS-004C





GS-004G

GS-004
TECHNICAL
PARAMETER

surface color
○ ● ●




Power:3W
CCT:3000K-6500K
Size:85×85×51mm
Cut Size: 81×81×50mm

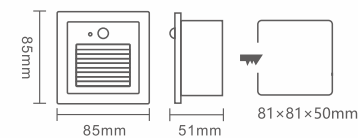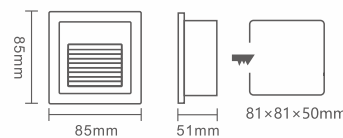

LED STEP LIGHT




GS-901
TECHNICAL
PARAMETER

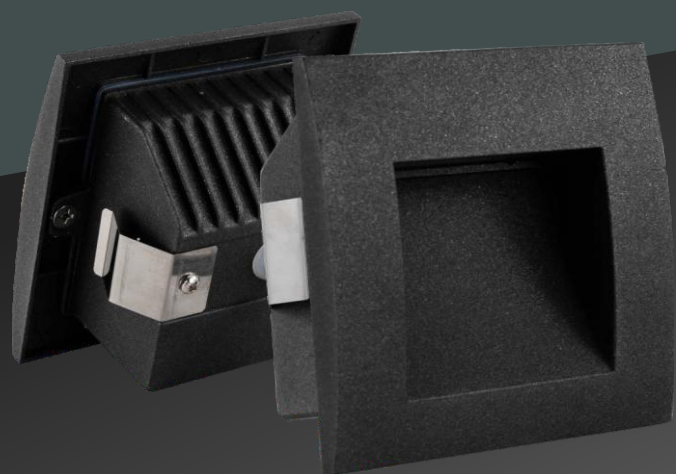

Product characteristics

- Long life of LED light source, once construction, several years of use.
- Low power consumption, no need to pay high electricity charges for lighting and beautification.
- Waterproof, dustproof, pressure and corrosion resistance.

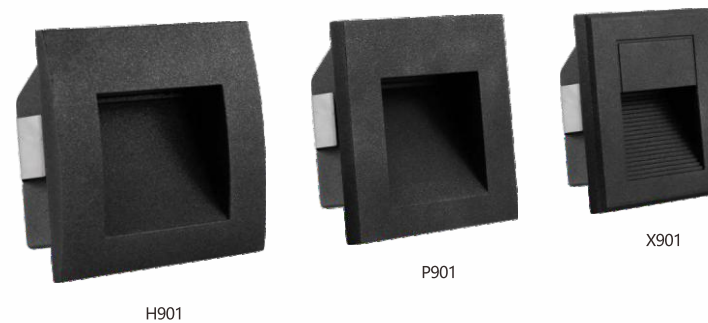



GS-901
TECHNICAL
PARAMETER

surface color
●





Power: 3W
CCT: 3000K-6500K
Size: 90×90×57mm
Cut Size: 81×81×50mm

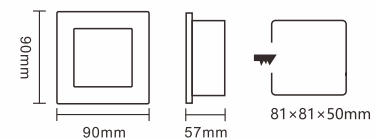

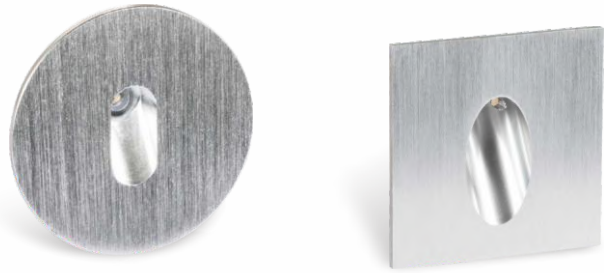

GS-013S
TECHNICAL
PARAMETER


Power:1W
CCT:3000K-6500K
Size:65×65×30mm
Cut Size: Ø45×50mm

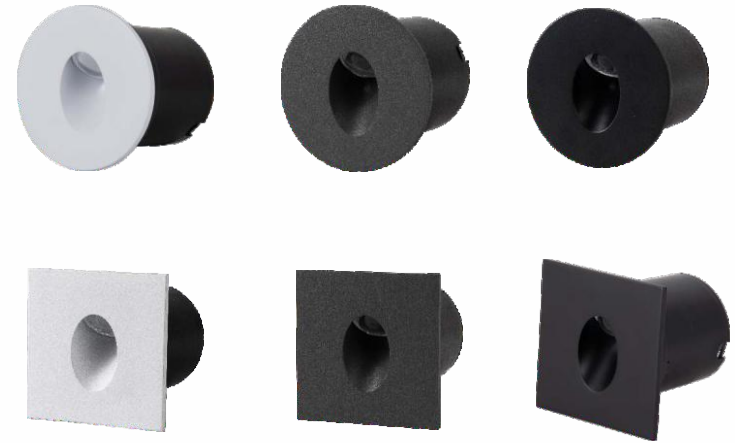

GS-012
TECHNICAL
PARAMETER

Power:1W
CCT:3000K-6500K
Size:Ø80×50mm
Cut Size: Ø75×60mm

Power:1W
CCT:3000K-6500K
Size:80×80×50mm
Cut Size: Ø75×60mm






IP65


GS-007
TECHNICAL
PARAMETER

Power:3W
CCT:3000K-6500K
Size:105×60×40mm
Cut Size: 99×50×50mm



IP65


Power:3W
CCT:3000K-6500K
Size:60×105×40mm
Cut Size: 50×99×50mm

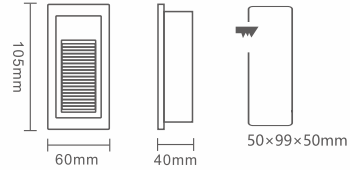

IP65


GS-019
TECHNICAL
PARAMETER

Power:6W
CCT:3000K-6500K
Size:210×65×60mm
Cut Size: 200×55×65mm



IP65

Power:3W
CCT:3000K-6500K
Size:65×210×60mm
Cut Size: 55×200×65mm



Everbright
GS-005C




GS-005G

IP65

GS-005
TECHNICAL
PARAMETER

Power:3W
CCT:3000K-6500K
Size:85×85×50mm
Cut Size: 80×80×50mm
(compatible with 86 standard box)







GS-165 TECHNICAL PARAMETER



Power:3W
CCT:3000K-6500K
Size:165×105×60mm
Cut Size: 160×100×70mm




Power:3W
CCT:3000K-6500K
Size:105×165×60mm
Cut Size: 100×160×70mm

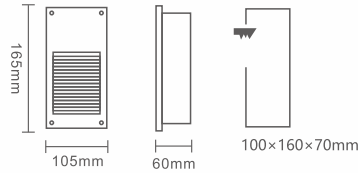

GS-011 TECHNICAL PARAMETER





Power:2W
CCT:3000K-6500K
Size:70×70×50mm
Cut Size: 65×65×50mm

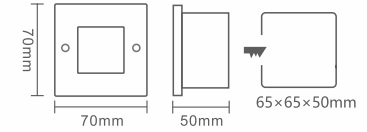


GS-081 TECHNICAL PARAMETER



Power:3W
CCT:3000K-6500K
Size:165×105×60mm
Cut Size: 160×100×70mm




Power:3W
CCT:3000K-6500K
Size:105×165×60mm
Cut Size: 100×160×70mm

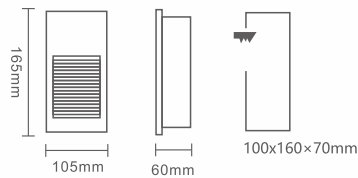


GS-010 TECHNICAL PARAMETER




Power:2W
CCT:3000K-6500K
Size:110×45×50mm
Cut Size:105×40×50mm




Power:4W
CCT:3000K-6500K
Size:170×70×50mm
Cut Size: 155×55×50mm






GS-021
TECHNICAL
PARAMETER

Power:1W
CCT:3000K-6500K
Size:58×58×50mm
Cut Size: 40×40×50mm




GS-006
TECHNICAL
PARAMETER

Power:3W
CCT:3000K-6500K
Size:145×70×50mm
Cut Size: 140×68×60mm




GS-018
TECHNICAL
PARAMETER

Power:3W
CCT:3000K-6500K
Size:115×85×50mm
Cut Size: 105×75×50mm




GS-018-2
TECHNICAL
PARAMETER

Power:6W
CCT:3000K-6500K
Size:214×85×50mm
Cut Size: 204×75×60mm





GS-014
TECHNICAL
PARAMETER

Power:1~3W
CCT:3000K-6500K
Size:85×85×50mm
Cut Size: 65×65×50mm




GS-008
TECHNICAL
PARAMETER

Power:3W
CCT:3000K-6500K
Size:Ø83×50mm
Cut Size: Ø65×55mm



GS-017Y
TECHNICAL
PARAMETER

Power:3W/6W
CCT:3000K-6500K
Size:Ø117×33mm
Ø200×33mm



GS-017F
TECHNICAL
PARAMETER

Power:3W/6W
CCT:3000K-6500K
Size:117×117×33mm
200×200×33mm

