

LIGHTING  
**HYDGET 恒域**

Room 402, No. 2, Dongxu Center, Lane 1933, North Zhangyang Road, Pudong New Area,  
Shanghai, China  
TEL: 86 21 58660886 / FAX: 86 21 58660062  
Email: sales@hydgetlighting.com

LIGHTING  
**HYDGET 恒域**



Magnetic System Product Catalogue

# Lighting design and application




## Ambient light

It was morning snow in the country, mist on the top of a mountain, and a cloudy day hanging over the sea. It was the rippling dome of the sky above the water, the soft light of the white tent in the noonday sun. Make one feel freedom, peace of mind, serenity.

The soft light provided by the lamps themselves to the space, and the light projected onto the wall, curtain, ceiling, floor can be formed environment light.

Ambient light focuses on recessed lamps and lighting levels

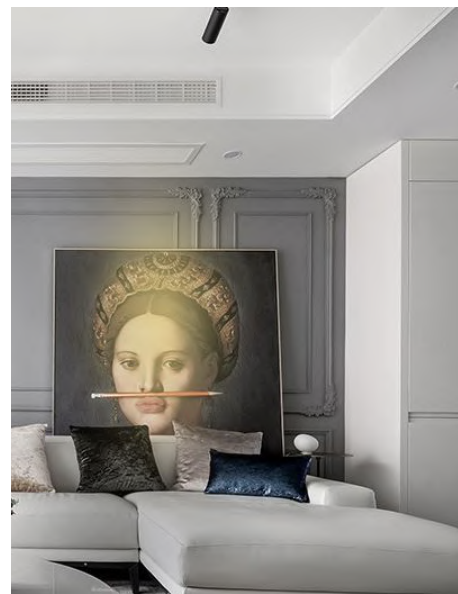

## Focal light


The focal light is a ubiquitous campfire, a beam of light through the clouds, a wisp sunlight warm of the distant mountains. It is like an aphorism, catches the eye.

It establishes priorities, directs and wins people's attention. It is concentrating light on the object, generating connection in the same space with irrelevant object, Distinguishing important items from unimportant items, it can also be used to object in store windows to attract attention.



## Partial light

Also known as job lighting, it is because of the activity of people and set the lighting. It provides light and helps people focus more on the task at hand. Put people to work at the state of being immersed

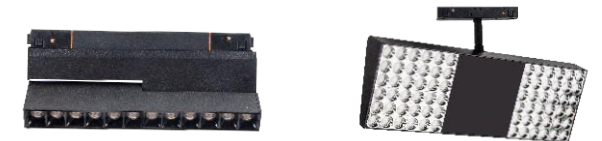

## Decorative light




It is the magical northern lights, the thousands of candles in the veranda of Versailles, the magical Christmas tree, the bright clouds in the night sky. It can be a shimmering decorative light, or it can be a space light on the unique objects, it is the sharp detail in the space, which reveals the space style, which is effective in stimulating people visual nerve, which cause physical and mental intoxication, arouse people's curiosity, let people have a pleasant feeling.









# contents

## 01 R20 series


	hanging/surface mounted	HYDR20-601	019-020
	surface mounted/hanging	HYDR20-638	019-020
	surface mounted/hanging	HYDR20-646	021-022
	surface mounted/hanging	HYDR20-647	021-022
	surface mounted/hanging	HYDR20-645	023-024
	recessed(before ceiling suspended)	HYDR20-602	029-030
	recessed(before ceiling suspended)	HYDR20-603	029-030
	recessed(after ceiling suspended)	HYDR20-505	031-032
	recessed(after ceiling suspended)	HYDR20-603	031-032
	Professional adjustable magnetic track	HYDR20-F20	033-034
	Curve track light	HYDmini28	041-042
	Curve track light	HYDmini11	043-044
	Curve track light	HYDmini05	045-046
	Double curve track light	HYDmini08	047-048
	linear flood light	HYDmini01	051-052
	Dot series	HYDmini02	055-056
	folding linear flood light	HYDmini23	059
	folding Dot series	HYDmini24	060
	Wall washer	HYDmini21	062
	Wall washer	HYDmini31	063-064

	pendant light	HYDmini10	065
	pendant light	HYDmini09	066
	Ball pendant light	HYDmini26 HYDmini25	067-068

## 02 R16 series









	Professional adjustable magnetic track	HYDR16-F16	071-072
	linear flood light	HYDR1601	075-076
	Dot series	HYDR1602	077-078
	folding linear flood light	HYDR1603	079
	folding Dot series	HYDR1604	080
	Curve track light	HYDR1605	081-082

## 03 R12 series





	Professional adjustable magnetic track	HYDR12-F12	085-086
	linear flood light	HYDR1201	089-090
	Dot series	HYDR1202	091-092
	folding linear flood light	HYDR1203	093
	folding Dot series	HYDR1204	094
	Curve track light	HYDR1205	095
	linear flood light	HYDR1206	096

# contents








## 04 R35 Classic series

	surface mounted/hanging	HYDR35-901	099-100
	Recessed Track Rail	HYDR35-902	101-102
	Recessed Track Rail	HYDR35-903	103-104
	linear flood light	HYDR3501	107-108
	Dot series	HYDR3502	109-110
	folding linear flood light	HYDR3503	111
	folding Dot series	HYDR3504	112
	Track Light	HYDR3505	113-114

## 05 R35 Elegant series

	surface mounted/hanging	HYDR35-102	117-118
	recessed(before ceiling suspended)	HYDR35-103	119-120
	recessed(after ceiling suspended)	HYDR35-104	119-120
	linear flood light	HYDCX07	125-126
	Dot series	HYDCX05	127-128
	folding linear flood light	HYDCX03	129
	folding Dot series	HYDCX05A	130
	Curve track light	HYDCX07F	131
	folding Dot series	HYDCX12F	132
	ball pendant light	HYDCX13F	133-134

## 06 W20 Round Series

	W20Surface installation/pendant round magnetic track rail	HYD-MR6801	139
	W20Recessed round magnetic track rail	HYD-MR6802	140
	Arc flood light	HYD-MR6801A	143
	Arc grille light	HYD-MR6801G	144
	Arc track light	HYD-MR6801D	145
	Round pendant light	HYD-R20-QR	147-148
	Concentric circle series	HYD-YZL07	149-152

## 07 W20 High level customization Special magnetic track series

Original design / Customized according to drawings and non-standard projects

More products are being updated.  
Please looking forward it.....



# R20

surface mounted/hanging



surface mounted/hanging  
HYDR20-601



surface mounted/hanging  
HYDR20-638



surface mounted/hanging  
HYDR20-646




surface mounted/hanging  
HYDR20-647



double magnetic track  
hanging/wall mounted  
HYDR20-645




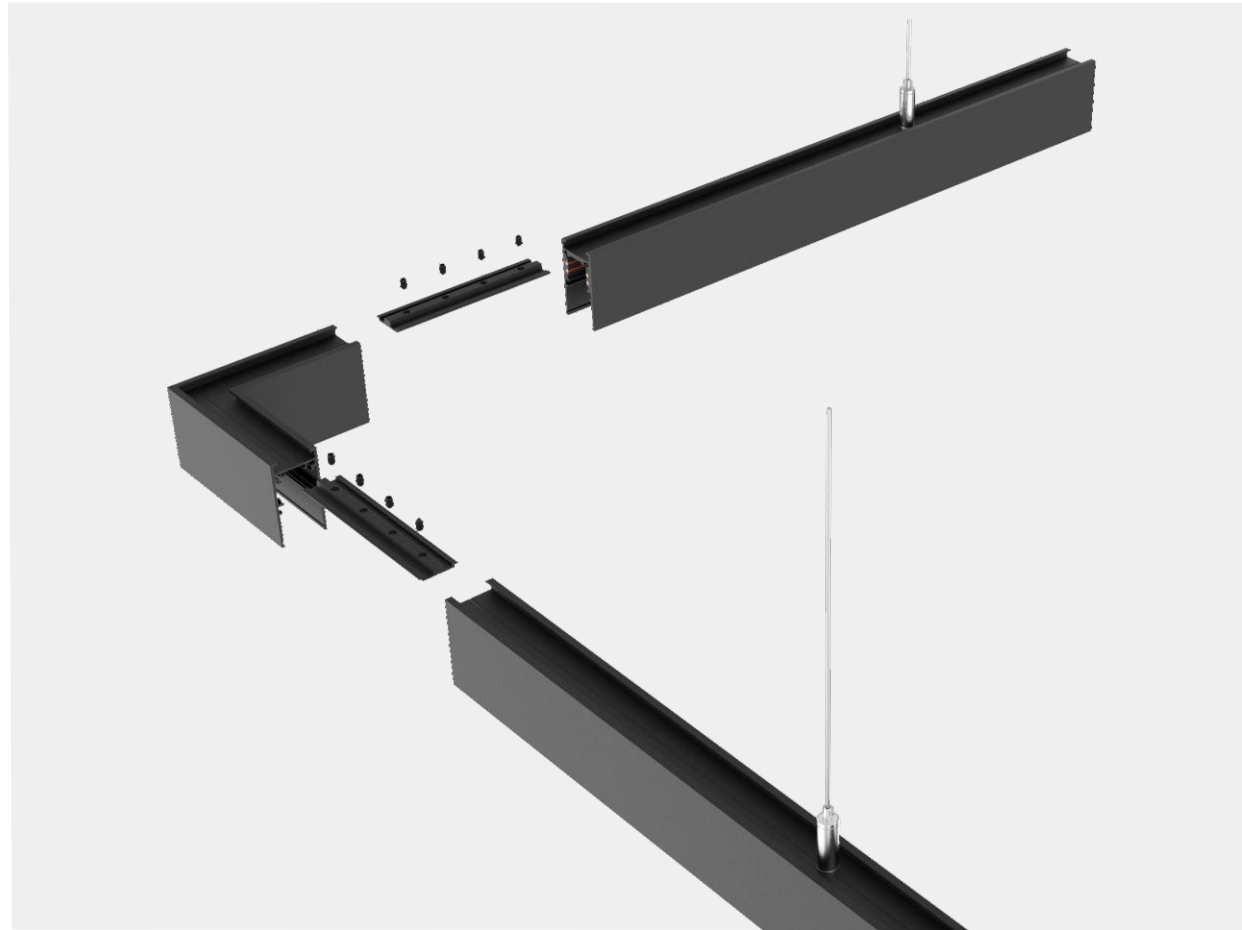

Specification

- Extruded aluminum profiles; ●For wall/ceiling surface mounting or suspension mounting
- The height is self-adjusting. ●Black splices are used for continuous lighting systems,
- 90 degree Angle connectors are used for flexible system design;
- Surface spray color: black/white/custom;
- Flexible installation without tools, magnetic support + locking: ●Protection class IP 20;
- Outer power supply or built-in power supply;
- Choose from non-dimming, 0-10V dimming, Bluetooth or Dali dimmable system;


installation

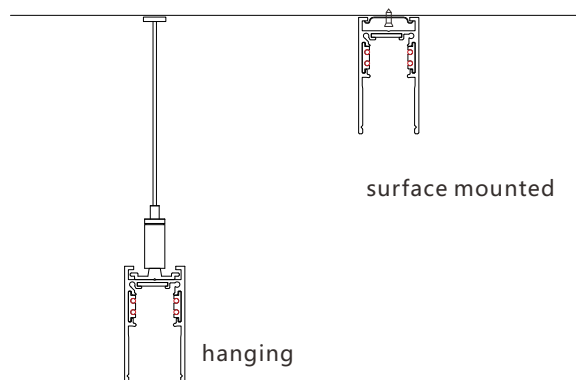

R20series surface mounted/hanging




Model HYD-638  
 installationsurface mounted/hanging  
 Size: W27\*H28mm  
 Length : L1000/2000/3000mm  
 material: aluminum  
 Housing color: matte black  
 /matte white /customization  
 Protection class IP20



R20series surface mounted/hanging




Model: HYD-601  
 installation: surface mounted/hanging  
 Size: W27\*H52mm  
 Length : L1000/2000/3000mm  
 material: aluminum  
 Housing color: matte black  
 /matte white /customization



install accessories


picture	name	drawing	Size(MM)	picture	name	drawing	Size(MM)
	outer L rail connector		100*100		inner L rail connector		100*100
	90° T rail connector		160*115		90°+ rail connector		160*160
	surface mounted end cap		27*52		recessed rail connect kits		23*105
	suspended wires		2000		input adaptor		90
	recessed rail adaptor		90		90° L rail adaptor		90
	T rail adaptor		90		150W built-in power supply		23*230
	200W outer power supply		115*215				

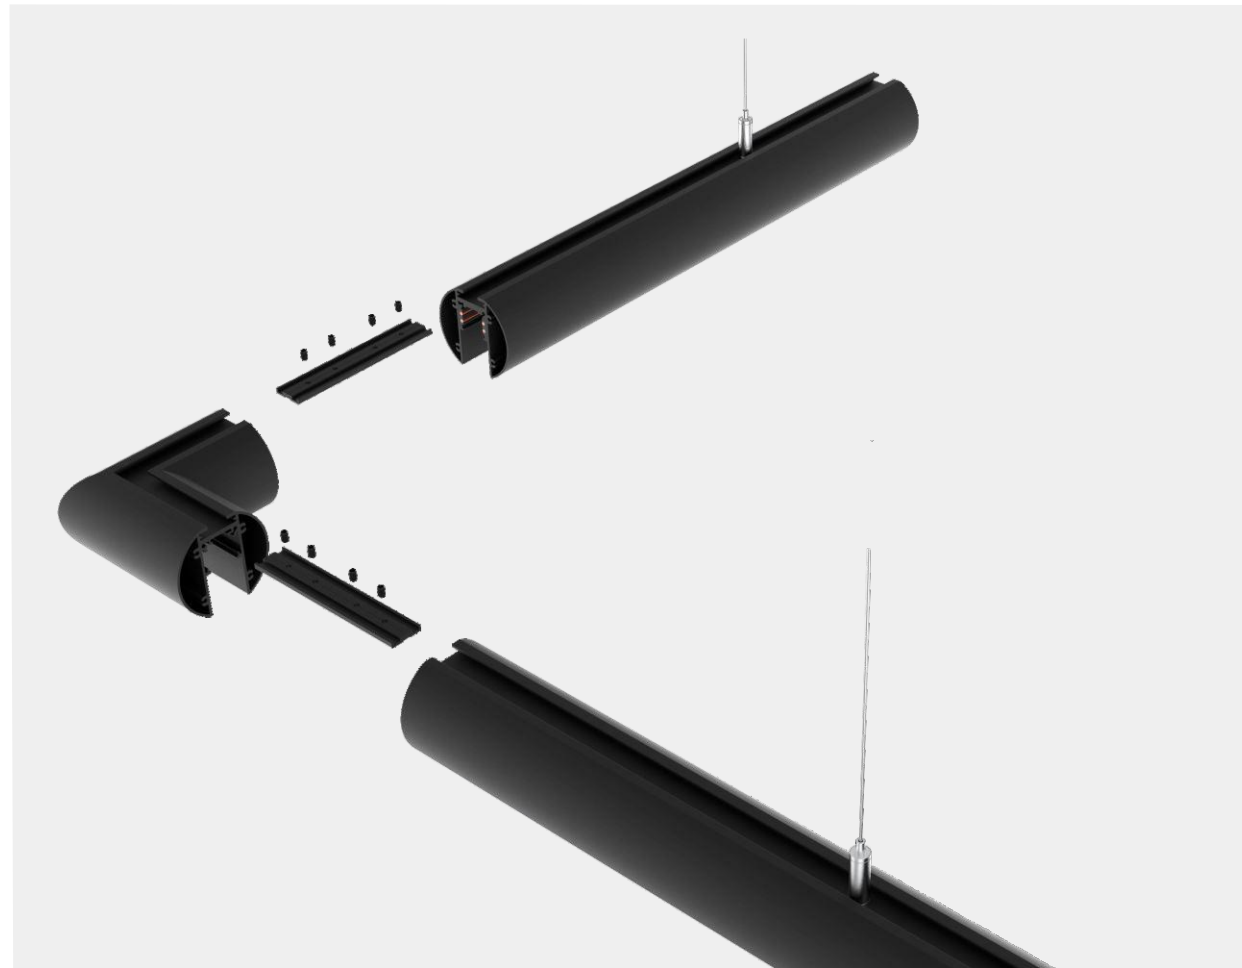

Specification

- Extruded aluminum profiles; ●For wall/ceiling surface mounting or suspension mounting
- The height is self-adjusting. ●Black splices are used for continuous lighting systems,
- 90 degree Angle connectors are used for flexible system design;
- Surface spray color: black/white/custom;
- Flexible installation without tools, magnetic support + locking: ●Protection class IP 20;
- Outer power supply or built-in power supply;
- Choose from non-dimming, 0-10V dimming, Bluetooth or Dali dimmable system;

installation

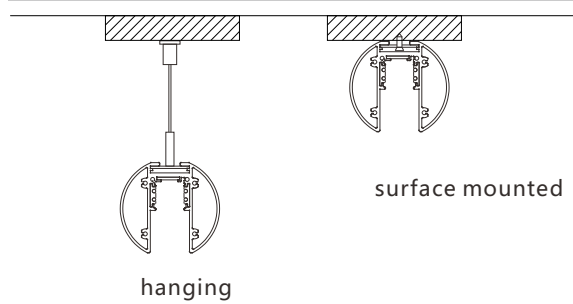

R20series hanging/surface mounted

Model HYD-647

installationsurface mounted/hanging

Size: W59\*H53mm


Length : L1000/2000/3000mm

material: aluminum

Housing color: matte black

/matte white /customization

Protection class : IP20



Model: HYD-646

installation: surface mounted/hanging

Size: W38\*H32mm


Length: L1000/2000/3000mm

material: aluminum

Housing color: matte black

/matte white /customization

Protection class : IP20



install accessories

picture	name	drawing	Size(MM)
	surface mounted end cap		59*53


picture	name	drawing	Size(MM)
	surface mounted end cap		38*32

picture	name	drawing	Size(MM)
	suspended wires		2000

picture	name	drawing	Size(MM)
	recessed rail connect kits		23*105

picture	name	drawing	Size(MM)
	recessed rail adaptor		18*90


picture	name	drawing	Size(MM)
	input adaptor		90

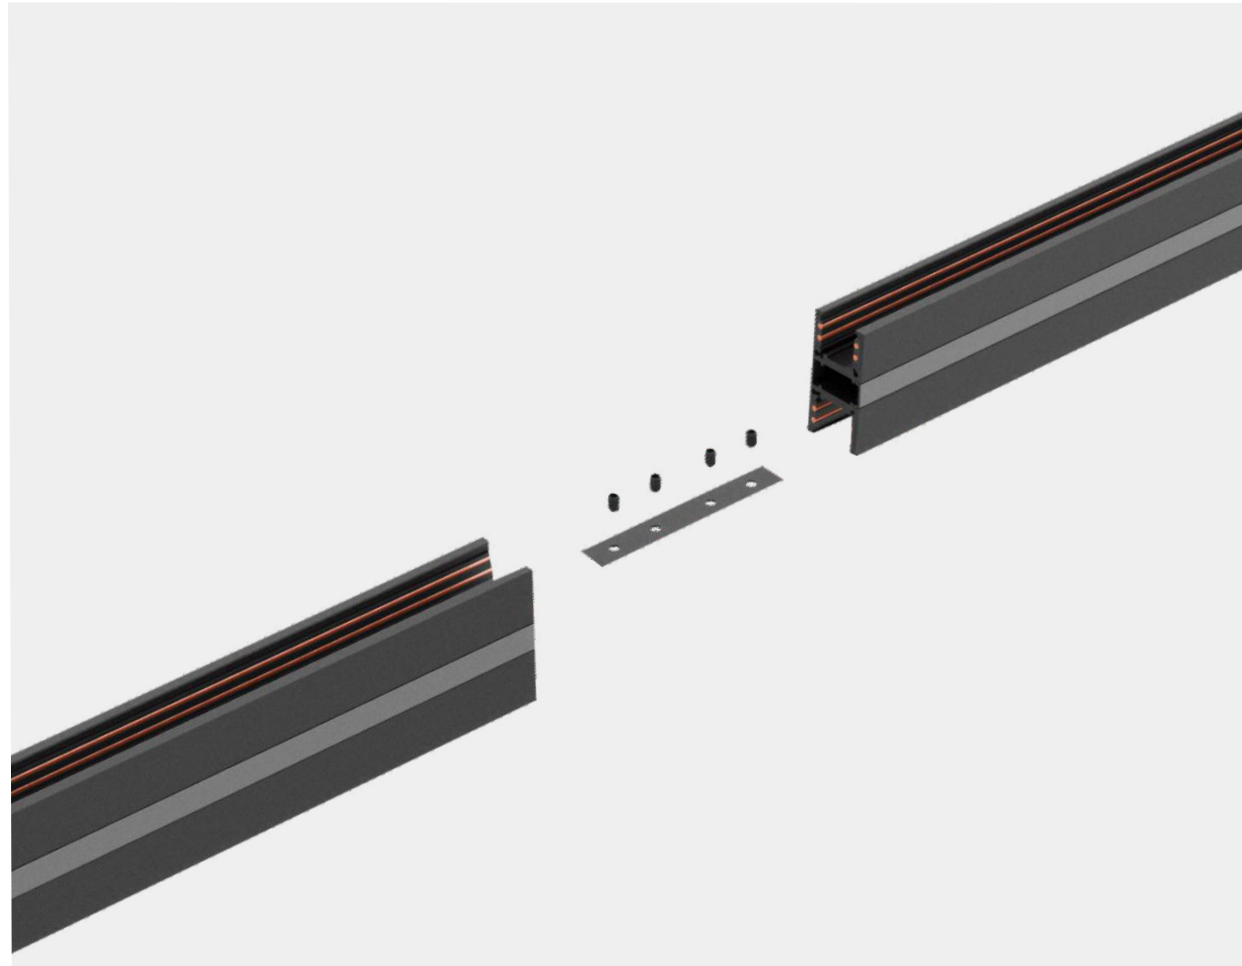


Specification

- Extruded aluminum profiles; ●For wall/ceiling surface mounting or suspension mounting
- The height is self-adjusting. ●Black splices are used for continuous lighting systems,
- 90 degree Angle connectors are used for flexible system design;
- Surface spray color: black/white/custom;
- Flexible installation without tools, magnetic support + locking: ●Protection class IP 20;
- Outer power supply or built-in power supply;
- Choose from non-dimming, 0-10V dimming, Bluetooth or Dali dimmable system;

installation




wall mounting



hanging



Model: HYD645  
 installation: hanging/wall mounted  
 Size: W27\*H54mm  
 Length: L1000/2000/3000mm  
 material: aluminum  
 Housing color: matte black  
 /matte white /customization  
 Protection class: IP20



install accessories

picture	name	drawing	Size(MM)
	surface mounted end cap		27*54

picture	name	drawing	Size(MM)
	Connecting plate		23*长度customization

picture	name	drawing	Size(MM)
	recessed rail adaptor		18*90

picture	name	drawing	Size(MM)
	input adaptor		90





R20 series



R20 series  
recessed track rail



Recessed  
(before ceiling suspended)  
HYD R20-602



(after ceiling suspended)  
HYDR20-506



(before ceiling suspended)  
HYDR20-505



(after ceiling suspended)  
HYDR20-603




### Specification


- Extruded aluminum profiles; ●For wall/ceiling surface mounting or suspension mounting
- The height is self-adjusting. ●Black splices are used for continuous lighting systems ,
- 90 degree Angle connectors are used for flexible system design ;
- Surface spray color: black/white/custom ;
- Flexible installation without tools, magnetic support + locking: ●Protection class IP 20;
- Outer power supply or built-in power supply ;
- Choose from non-dimming, 0-10V dimming, Bluetooth or Dali dimmable system;

### installation

Keel embedded type



Wooden box embedded type




The track and lamps are locked by magnetic suction mechanical buckle

### R20series




Model: HYD20-506 installation:  
recessed  
Size: W72\*H52mm  
cut-out Size: W35-40mm  
Length : L1000/2000/3000mm  
material: aluminum  
Housing color: matte black  
/matte white /customization  
Protection class : IP20

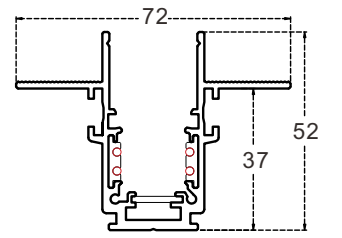

### R20series



Model: HYD20-602 installation:  
recessed  
Size: W70\*H47mm  
Cut-out Size: W35-40mm  
Length: L1000/2000/3000mm  
material: aluminum  
Housing color: matte black  
/matte white /customization  
Protection class : IP20

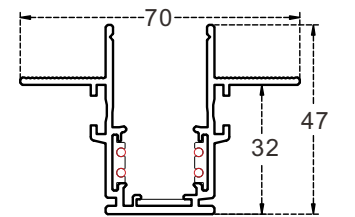

### install accessories


picture	name	drawing	Size(MM)	picture	name	drawing	Size(MM)
	outer L rail connector		100*100		inner L rail connector		100*100
	90°T rail connector		160*115		90°+ rail connector		160*160
	recessed rail end cap		27*52		recessed rail connect kits		10*50
	recessed rail adaptor		18*90		input adaptor		18*90
	T rail adaptor		90		90° L rail adaptor		90
	150W built-in power supply		23*230		200W outer power supply		115*215
	arc-shaped rail connector		Ø200MM				



Specification

- Extruded aluminum profiles; ●For wall/ceiling surface mounting or suspension mounting
- The height is self-adjusting. ●Black splices are used for continuous lighting systems ,
- 90 degree Angle connectors are used for flexible system design ;
- Surface spray color: black/white/custom ;
- Flexible installation without tools, magnetic support + locking: ●Protection class IP 20;
- Outer power supply or built-in power supply ;
- Choose from non-dimming, 0-10V dimming, Bluetooth or Dali dimmable system;

installation

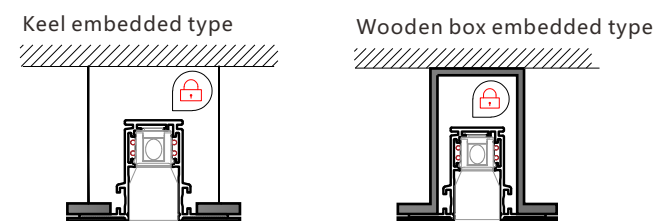


The track and lamps are locked by magnetic suction mechanical buckle

R20series




Model: HYD20-505 installation:  
recessed  
Size: W70\*H52mm  
cut-out Size: W35-40mm  
Length: L1000/2000/3000mm  
material: aluminum  
Housing color: matte black  
/matte white /customization  
Protection class IP20: IP20

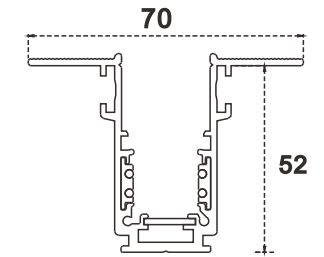

R20series




Model: HYD20-603 installation:  
recessed  
Size: W69\*H47mm  
cut-out Size: W35-40mm  
Length : L1000/2000/3000mm  
material: aluminum  
Housing color: matte black  
/matte white /customization  
Protection class IP20: IP20

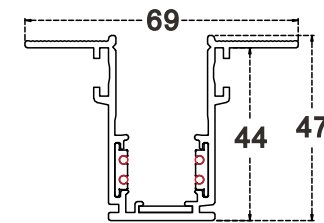

Install accessories

picture	name	drawing	Size(MM)	picture	name	drawing	Size(MM)
	outer L rail connector		100*100		inner L rail connector		100*100
	90°T rail connector		160*115		90°+ rail connector		160*160
	recessed rail end cap		27*52		recessed rail connect kits		10*50
	recessed rail l adaptor		18*90		input adaptor		18*90
	T rail adaptor		90		90° L rail adaptor		90
	150W built-in power supply		23*230		200W outer power supply		115*215

hanging/surface mounted/recessed

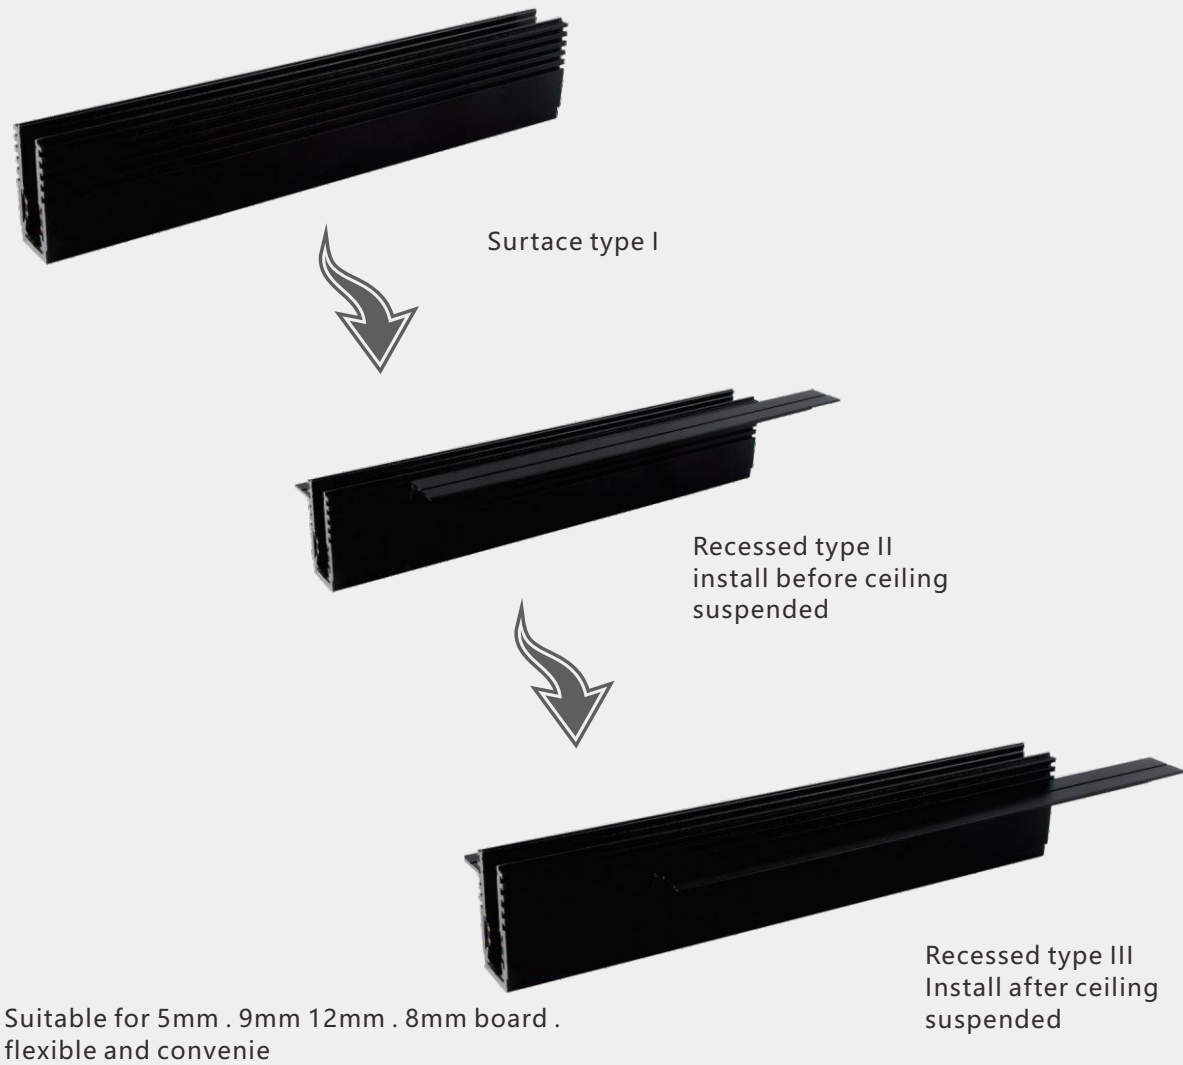

Specification


- Extruded aluminum profiles; ●For wall/ceiling surface mounting or suspension mounting
- The height is self-adjusting. ●Black splices are used for continuous lighting systems ,
- 90 degree Angle connectors are used for flexible system design;
- Surface spray color: black/white/Other color;
- Flexible installation without tools, magnetic support + locking: ●Protection class IP 20;
- Outer power supply or built-in power supply;
- Choose from non-dimming, 0-10V dimming, Bluetooth or Dali dimmable system;

R20series One rail is multi-purpose


Model: HYDR20-F20  
installation: hanging/surface mounted/recessed  
Size: surface mountedW35\*H50mm  
recessedW76.5\*H50mm

cut-out Size: recessedW40-45mm  
Length : L1000/2000/3000mm  
material: aluminum  
Housing color: matte black  
/matte white /customization  
Protection class : IP20

Replaceable fixing plate




Track section Size drawing (mm)

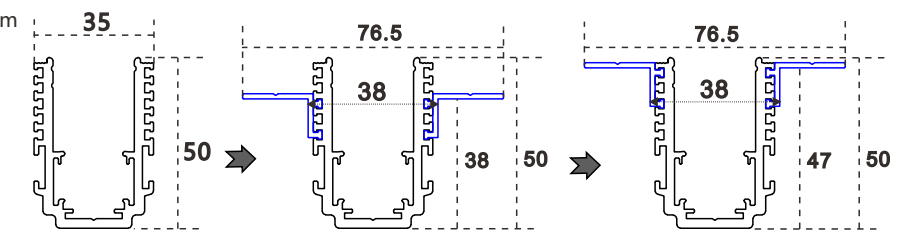


installation


Keel embedded type

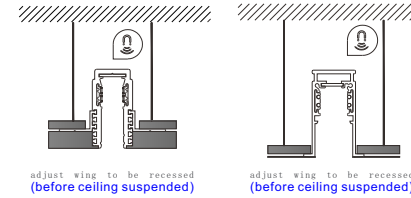

Wooden box embedded type

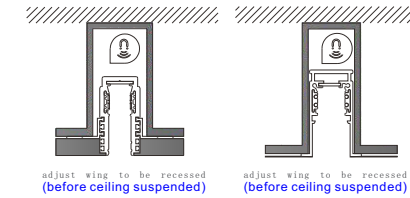

hanging/surface mounted

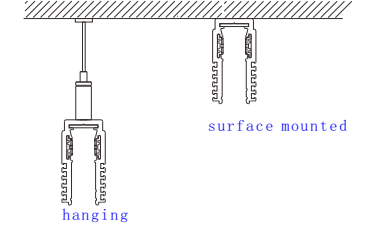




install accessories

picture	name	drawing	Size(MM)	picture	name	drawing	Size(MM)
	outer L rail connector		100*100		inner L rail connector		100*100
	90°T rail connector		160*115		90°+ rail connector		160*160
	end cap		35*50		connect kits		23*105
	suspended wires		2000		input adaptor		90
	recessed rail l adaptor		18*90		90° L rail adaptor		90
	T rail adaptor		90		built-in power supply		23*230
	200W outer power supply		115*215				

# 3 R20 series

Magnetic light product

	Curve track light HYD-miniLED05		linear flood light HYD-miniLED01
	Curve track light HYD-miniLED11		Dot series HYD-miniLED02
	Curve track light HYD-miniLED28		folding linear flood light HYD-miniLED23
	Double curve track light HYD-miniLED08		folding Dot series HYD-miniLED24
	Wall washer HYD-miniLED30		pendant light HYD-miniLED25
	Wall washer HYD-miniLED21		pendant light HYD-miniLED26
	45suspended wires HYD-miniLED10		30suspended wires HYD-miniLED09




**HOT**







Model	HYD-miniLED28-3W		
Size	Φ25*50mm	Power	3W
Material	6063 aluminum	CCT	3000K/4000K/6000K/Dimmable
Housing color	White/Black/Other color	CRI	≥90
Protection class	IP20	Beam angle	15°/24°/36°
Intelligent dimming	Available	LED	OSRAM
Lumen	>80LM/W	Voltage	DC48V




Model	HYD-miniLED28-5W		
Size	Φ40*85mm	Power	5W
Material	6063 aluminum	CCT	3000K/4000K/6000K/Dimmable
Housing color	White/Black/Other color	CRI	≥90
Protection class	IP20	Beam angle	15°/24°/36°
Intelligent dimming	Available	LED	OSRAM
Lumen	>80LM/W	Voltage	DC48V





Model	HYD-miniLED28-7W		
Size	Φ45*110mm	Power	7W
Material	6063 aluminum	CCT	3000K/4000K/6000K/Dimmable
Housing color	White/Black/Other color	CRI	≥90
Protection class	IP20	Beam angle	15°/24°/36°
Intelligent dimming	Available	LED	OSRAM
Lumen	>80LM/W	Voltage	DC48V




Model	HYD-miniLED28-10W		
Size	Φ55*125mm	Power	10W
Material	6063 aluminum	CCT	3000K/4000K/6000K/Dimmable
Housing color	White/Black/Other color	CRI	≥90
Protection class	IP20	Beam angle	15°/24°/36°
Intelligent dimming	Available	LED	OSRAM
Lumen	>80LM/W	Voltage	DC48V



Model	HYD-miniLED28-15W		
Size	Φ65*135mm	Power	15W
Material	6063 aluminum	CCT	3000K/4000K/6000K/Dimmable
Housing color	White/Black/Other color	CRI	≥90
Protection class	IP20	Beam angle	15°/24°/36°
Intelligent dimming	Available	LED	OSRAM
Lumen	>80LM/W	Voltage	DC48V

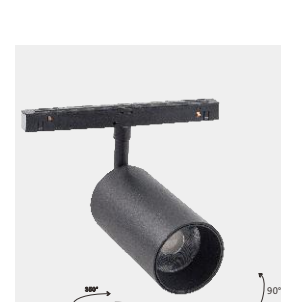



Model	HYD-miniLED28-20W		
Size	Φ75*135mm	Power	20W
Material	6063 aluminum	CCT	3000K/4000K/6000K/Dimmable
Housing color	White/Black/Other color	CRI	≥90
Protection class	IP20	Beam angle	15°/24°/36°
Intelligent dimming	Available	LED	OSRAM
Lumen	>80LM/W	Voltage	DC48V




Control system

- ON/OFF
- 0-10V
- Bluetooth
- Dali dimming control
- Zigbee dimming control
- Triac dimming control
- Other dimming control

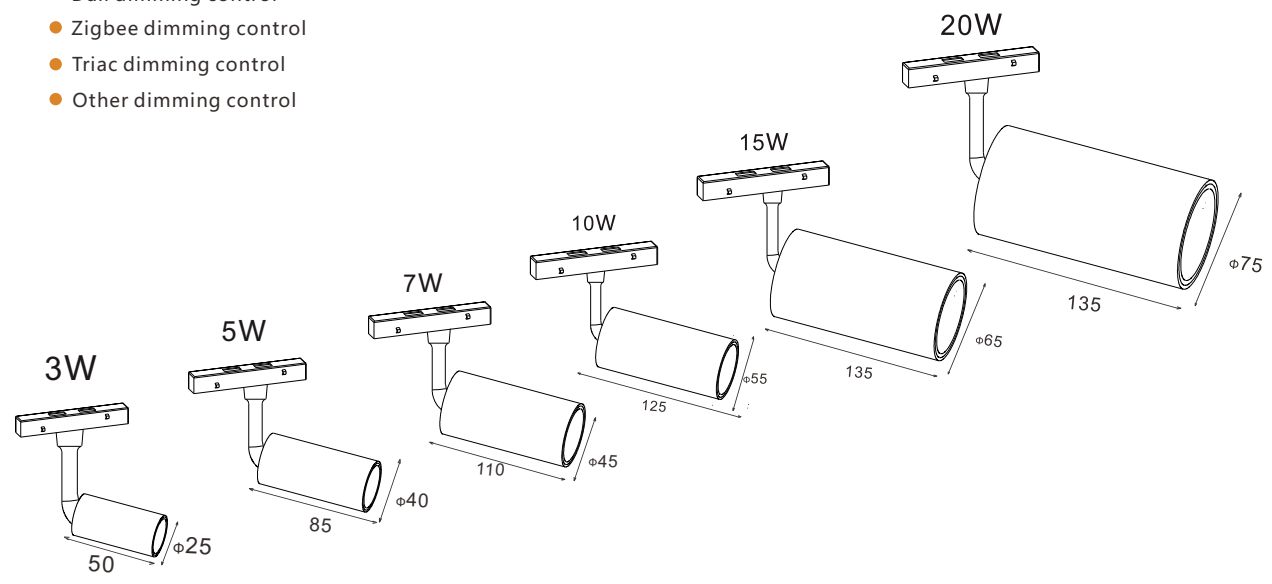




Model	HYD-miniLED11-3W		
Size	Φ40*50mm	Power	3W
Material	6063 aluminum	CCT	3000K/4000K/6000K/Dimmable
Housing color	White/Black/Other color	CRI	≥90
Protection class	IP20	Beam angle	15°/24°/36°
Intelligent dimming	Available	LED	OSRAM
Lumen	>80LM/W	Voltage	DC48V




Model	HYD-miniLED11-5W		
Size	Φ40*80mm	Power	5W
Material	6063 aluminum	CCT	3000K/4000K/6000K/Dimmable
Housing color	White/Black/Other color	CRI	≥90
Protection class	IP20	Beam angle	15°/24°/36°
Intelligent dimming	Available	LED	OSRAM
Lumen	>80LM/W	Voltage	DC48V




Model	HYD-miniLED11-10W		
Size	Φ55*100mm	Power	10W
Material	6063 aluminum	CCT	3000K/4000K/6000K/Dimmable
Housing color	White/Black/Other color	CRI	≥90
Protection class	IP20	Beam angle	15°/24°/36°
Intelligent dimming	Available	LED	OSRAM
Lumen	>80LM/W	Voltage	DC48V



Model	HYD-miniLED11-15W		
Size	Φ55*140mm	Power	15W
Material	6063 aluminum	CCT	3000K/4000K/6000K/Dimmable
Housing color	White/Black/Other color	CRI	≥90
Protection class	IP20	Beam angle	15°/24°/36°
Intelligent dimming	Available	LED	OSRAM
Lumen	>80LM/W	Voltage	DC48V





Model	HYD-miniLED11-16W		
Size	Φ55*180mm	Power	16W
Material	6063 aluminum	CCT	3000K/4000K/6000K/Dimmable
Housing color	White/Black/Other color	CRI	≥90
Protection class	IP20	Beam angle	15°/24°/36°
Intelligent dimming	Available	LED	OSRAM
Lumen	>80LM/W	Voltage	DC48V



### Control system


- ON/OFF
- 0-10V
- Bluetooth
- Dali dimming control
- Zigbee dimming control
- Triac dimming control
- Other dimming control

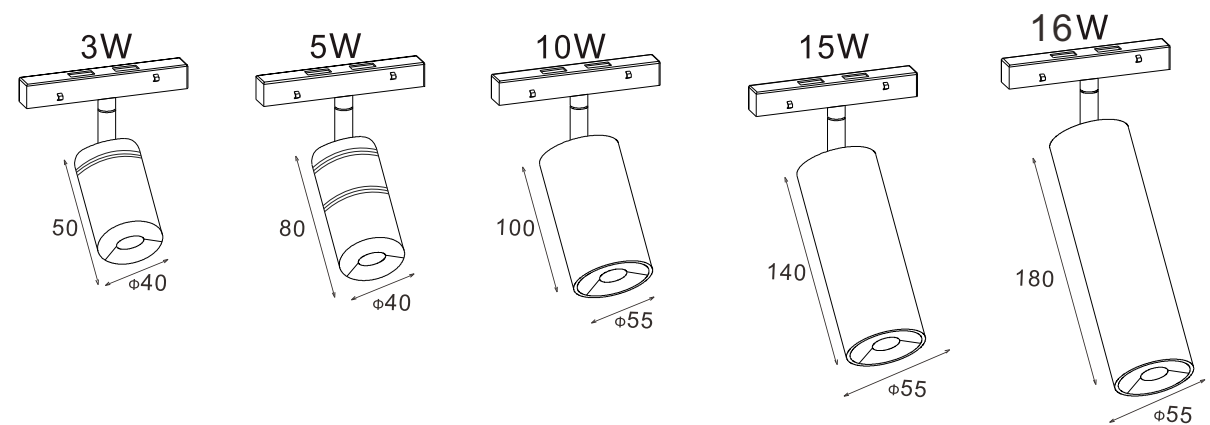







Model	HYD-miniLED05-5W		
Size	Φ26*125mm	Power	5W
Material	6063 aluminum	CCT	3000K/4000K/6000K/Dimmable
Housing color	White/Black/Other color	CRI	≥90
Protection class	IP20	Beam angle	15°/24°/36°
Intelligent dimming	Available	LED	OSRAM
Lumen	>80LM/W	Voltage	DC48V




Model	HYD-miniLED05-20W		
Size	Φ45*200mm	Power	20W
Material	6063 aluminum	CCT	3000K/4000K/6000K/Dimmable
Housing color	White/Black/Other color	CRI	≥90
Protection class	IP20	Beam angle	15°/24°/36°
Intelligent dimming	Available	LED	OSRAM
Lumen	>80LM/W	Voltage	DC48V



Model	HYD-miniLED05-10W		
Size	Φ45*90mm	Power	10W
Material	6063 aluminum	CCT	3000K/4000K/6000K/Dimmable
Housing color	White/Black/Other color	CRI	≥90
Protection class	IP20	Beam angle	15°/24°/36°
Intelligent dimming	Available	LED	OSRAM
Lumen	>80LM/W	Voltage	DC48V





Model	HYD-miniLED05-15W		
Size	Φ45*120mm	Power	15W
Material	6063 aluminum	CCT	3000K/4000K/6000K/Dimmable
Housing color	White/Black/Other color	CRI	≥90
Protection class	IP20	Beam angle	15°/24°/36°
Intelligent dimming	Available	LED	OSRAM
Lumen	>80LM/W	Voltage	DC48V




### Control system

- ON/OFF
- 0-10V
- Bluetooth
- Dali dimming control
- Zigbee dimming control
- Triac dimming control
- Other dimming control

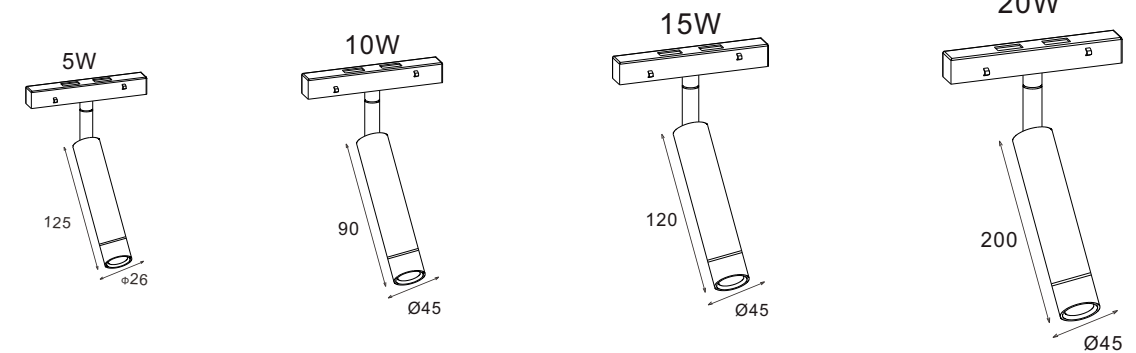





Model	HYD-miniLED08-10W		
Size	Ø45*H90mm	Power	5W*2
Material	6063 aluminum	CCT	3000K/4000K/6000K/Dimmable
Housing color	White/Black/Other color	CRI	≥90
Protection class	IP20	Beam angle	15°/24°/36°
Intelligent dimming Available		LED	OSRAM
Lumen	>80LM/W	Voltage	DC48V



Model	HYD-miniLED08-20W		
Size	Ø45*H120mm	Power	10W*2
Material	6063 aluminum	CCT	3000K/4000K/6000K/Dimmable
Housing color	White/Black/Other color	CRI	≥90
Protection class	IP20	Beam angle	15°/24°/36°
Intelligent dimming Available		LED	OSRAM
Lumen	>80LM/W	Voltage	DC48V







Model	HYD-miniLED08-30W		
Size	Ø45*H200mm	Power	15W*2
Material	6063 aluminum	CCT	3000K/4000K/6000K/Dimmable
Housing color	White/Black/Other color	CRI	≥90
Protection class	IP20	Beam angle	15°/24°/36°
Intelligent dimming Available		LED	OSRAM
Lumen	>80LM/W	Voltage	DC48V



Control system

- ON/OFF
- 0-10V
- Bluetooth
- Dali dimming control
- Zigbee dimming control
- Triac dimming control
- Other dimming control

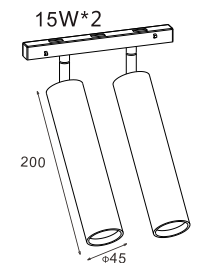






DC48V


low voltage safer





	Model	HYD-miniLED01-6W	
	Size	L112*W23*H45mm	Power 6W
	Material	6063 aluminum	CCT 3000K/4000K/6000K/Dimmable
	Housing color	White/Black/Other color	CRI ≥90
	Protection class	IP20	Beam angle 120°
	Intelligent dimming	Available	LED OSRAM
	Lumen	>80LM/W	Voltage DC48V





	Model	HYD-miniLED01-8W	
	Size	L220*W23*H45mm	Power 8W
	Material	6063 aluminum	CCT 3000K/4000K/6000K/Dimmable
	Housing color	White/Black/Other color	CRI ≥90
	Protection class	IP20	Beam angle 120°
	Intelligent dimming	Available	LED OSRAM
	Lumen	>80LM/W	Voltage DC48V





	Model	HYD-miniLED01-12W	
	Size	L328*W23*H45mm	Power 12W
	Material	6063 aluminum	CCT 3000K/4000K/6000K/Dimmable
	Housing color	White/Black/Other color	CRI ≥90
	Protection class	IP20	Beam angle 120°
	Intelligent dimming	Available	LED OSRAM
	Lumen	>80LM/W	Voltage DC48V





	Model	HYD-miniLED01-15W	
	Size	L436*W23*H45mm	Power 15W
	Material	6063 aluminum	CCT 3000K/4000K/6000K/Dimmable
	Housing color	White/Black/Other color	CRI ≥90
	Protection class	IP20	Beam angle 120°
	Intelligent dimming	Available	LED OSRAM
	Lumen	>80LM/W	Voltage DC48V



	Model	HYD-miniLED01-20W	
	Size	L652*W23*H45mm	Power 20W
	Material	6063 aluminum	CCT 3000K/4000K/6000K/Dimmable
	Housing color	White/Black/Other color	CRI ≥90
	Protection class	IP20	Beam angle 120°
	Intelligent dimming	Available	LED OSRAM
	Lumen	>80LM/W	Voltage DC48V





	Model	HYD-miniLED01-22W	
	Size	L868*W23*H45mm	Power 22W
	Material	6063 aluminum	CCT 3000K/4000K/6000K/Dimmable
	Housing color	White/Black/Other color	CRI ≥90
	Protection class	IP20	Beam angle 120°
	Intelligent dimming	Available	LED OSRAM
	Lumen	>80LM/W	Voltage DC48V



### Control system

- ON/OFF
- 0-10V
- Bluetooth
- Dali dimming control
- Zigbee dimming control
- Triac dimming control
- Other dimming control

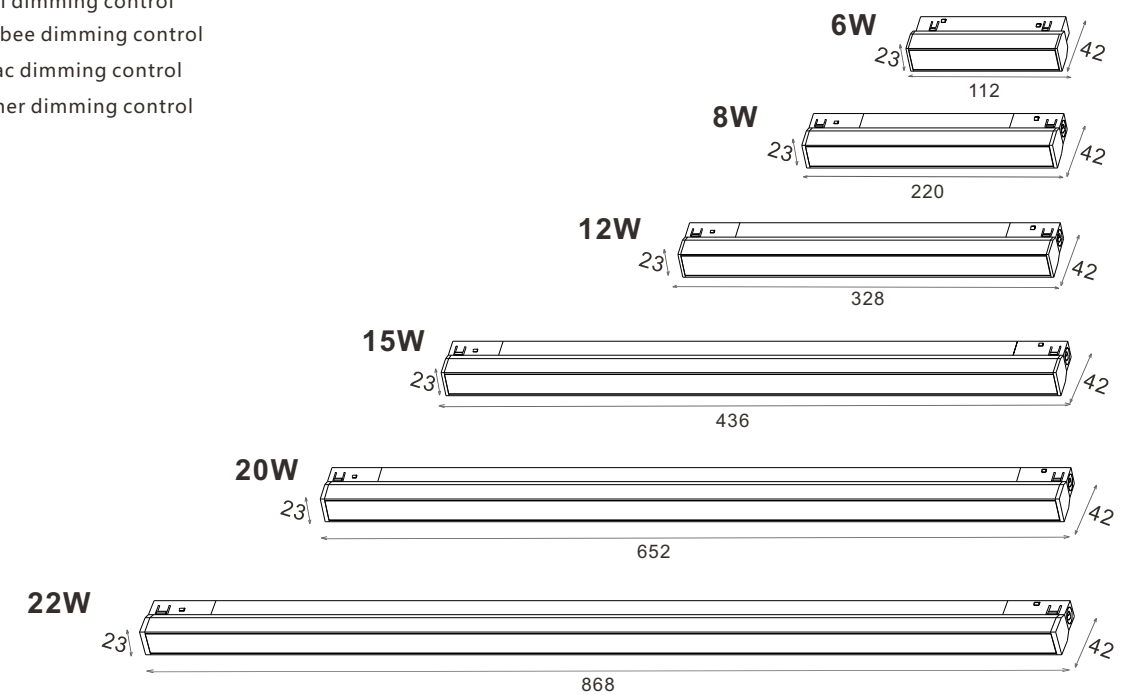



Optical lens

Multicolor and selection






☑ Square ☑ Round  
Multicolor and selection

Model	HYD-miniLED02-6W		
Size	L112*W23*H45mm	Power	6W
Material	6063 aluminum	CCT	3000K/4000K/6000K/Dimmable
Housing color	White/Black/Other color	CRI	≥90
Protection class	IP20	Beam angle	24°
Intelligent dimming	Available	LED	OSRAM
Lumen	>80LM/W	Voltage	DC48V



☑ Square ☑ Round  
Multicolor and selection

Model	HYD-miniLED02-20W		
Size	L655*W23*H45mm	Power	20W
Material	6063 aluminum	CCT	3000K/4000K/6000K/Dimmable
Housing color	White/Black/Other color	CRI	≥90
Protection class	IP20	Beam angle	24°
Intelligent dimming	Available	LED	OSRAM
Lumen	>80LM/W	Voltage	DC48V




☑ Square ☑ Round  
Multicolor and selection

Model	HYD-miniLED02-8W		
Size	L220*W23*H45mm	Power	8W
Material	6063 aluminum	CCT	3000K/4000K/6000K/Dimmable
Housing color	White/Black/Other color	CRI	≥90
Protection class	IP20	Beam angle	24°
Intelligent dimming	Available	LED	OSRAM
Lumen	>80LM/W	Voltage	DC48V




☑ Square ☑ Round  
Multicolor and selection

Model	HYD-miniLED02-22W		
Size	L868*W23*H45mm	Power	22W
Material	6063 aluminum	CCT	3000K/4000K/6000K/Dimmable
Housing color	White/Black/Other color	CRI	≥90
Protection class	IP20	Beam angle	24°
Intelligent dimming	Available	LED	OSRAM
Lumen	>80LM/W	Voltage	DC48V



☑ Square ☑ Round  
Multicolor and selection

Model	HYD-miniLED02-12W		
Size	L328*W23*H45mm	Power	12W
Material	6063 aluminum	CCT	3000K/4000K/6000K/Dimmable
Housing color	White/Black/Other color	CRI	≥90
Protection class	IP20	Beam angle	24°
Intelligent dimming	Available	LED	OSRAM
Lumen	>80LM/W	Voltage	DC48V






☑ Square ☑ Round  
Multicolor and selection

Model	HYD-miniLED02-15W		
Size	L436*W23*H45mm	Power	15W
Material	6063 aluminum	CCT	3000K/4000K/6000K/Dimmable
Housing color	White/Black/Other color	CRI	≥90
Protection class	IP20	Beam angle	24°
Intelligent dimming	Available	LED	OSRAM
Lumen	>80LM/W	Voltage	DC48V

Control system

- ON/OFF
  - 0-10V
  - Bluetooth
  - Dali dimming control
  - Zigbee dimming control
  - Triac dimming control
  - Other dimming control
- Multicolor and selection

two reflectors: ☑ Square ☑ Round

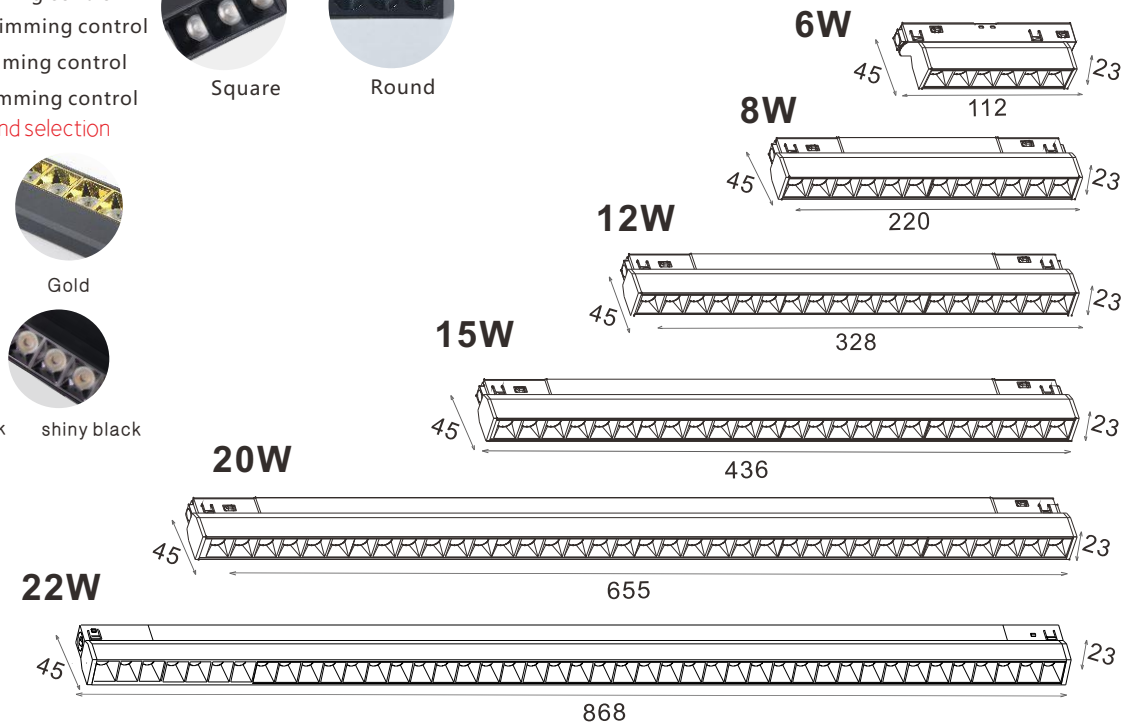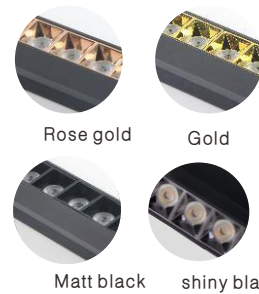





**Free movement**  
**Free combination**








Model	HYD-miniLED23-6W		
Size	L112*W23*H83mm	Power	6W
Material	6063 aluminum	CCT	3000K/4000K/6000K/Dimmable
Housing color	White/Black/Other color	CRI	≥90
Protection class	IP20	Beam angle	120°
Intelligent dimming	Available	LED	OSRAM
Lumen	>80LM/W	Voltage	DC48V

Model	HYD-miniLED23-12W		
Size	L220*W23*H83mm	Power	12W
Material	6063 aluminum	CCT	3000K/4000K/6000K/Dimmable
Housing color	White/Black/Other color	CRI	≥90
Protection class	IP20	Beam angle	120°
Intelligent dimming	Available	LED	OSRAM
Lumen	>80LM/W	Voltage	DC48V







Model	HYD-miniLED23-18W		
Size	L328*W23*H83mm	Power	18W
Material	6063 aluminum	CCT	3000K/4000K/6000K/Dimmable
Housing color	White/Black/Other color	CRI	≥90
Protection class	IP20	Beam angle	120°
Intelligent dimming	Available	LED	OSRAM
Lumen	>80LM/W	Voltage	DC48V





Control system

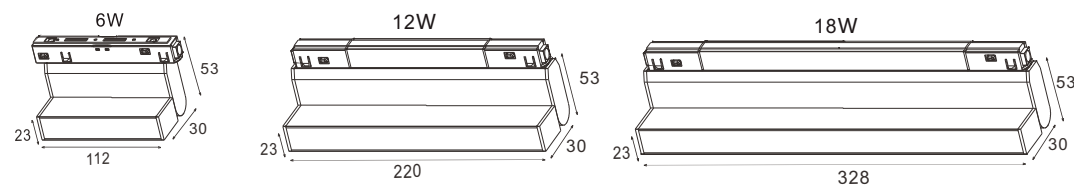- ON/OFF
- 0-10V
- Bluetooth
- Dali dimming control
- Zigbee dimming control
- Triac dimming control
- Other dimming control



Model	HYD-miniLED24-6W		
Size	L112*W23*H83mm	Power	6W
Material	6063 aluminum	CCT	3000K/4000K/6000K/Dimmable
Housing color	White/Black/Other color	CRI	≥90
Protection class	IP20	Beam angle	24°
Intelligent dimming	Available	LED	OSRAM
Lumen	>80LM/W	Voltage	DC48V

☑ Square Round  
Multicolor and selection


Model	HYD-miniLED24-12		
Size	L220*W23*H83mm	Power	12W
Material	6063 aluminum	CCT	3000K/4000K/6000K/Dimmable
Housing color	White/Black/Other color	CRI	≥90
Protection class	IP20	Beam angle	24°
Intelligent dimming	Available	LED	OSRAM
Lumen	>80LM/W	Voltage	DC48V

☑ Square Round  
Multicolor and selection

Model	HYD-miniLED24-18W		
Size	L328*W23*H83mm	Power	18W
Material	6063 aluminum	CCT	3000K/4000K/6000K/Dimmable
Housing color	White/Black/Other color	CRI	≥90
Protection class	IP20	Beam angle	24°
Intelligent dimming	Available	LED	OSRAM
Lumen	>80LM/W	Voltage	DC48V


☑ Square Round  
Multicolor and selection



Control system

- ON/OFF
- 0-10V
- Bluetooth
- Dali dimming control
- Zigbee dimming control
- Triac dimming control
- Other dimming control


two reflectors: ☑ Square ☑ Round

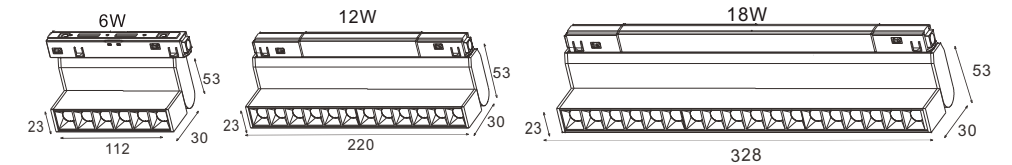






Model	HYD-miniLED21-10W		
Size	L150*W25*H93mm	Power	10W
Material	6063 aluminum	CCT	3000K/4000K/6000K/Dimmable
Housing color	White/Black/Other color	CRI	≥90
Protection class	IP20	Beam angle	斜射110°
Intelligent dimming	Available	LED	OSRAM
Lumen	>80LM/W	Voltage	DC48V






Model	HYD-miniLED21-20W		
Size	L300*W25*H93mm	Power	20W
Material	6063 aluminum	CCT	3000K/4000K/6000K/Dimmable
Housing color	White/Black/Other color	CRI	≥90
Protection class	IP20	Beam angle	斜射110°
Intelligent dimming	Available	LED	OSRAM
Lumen	>80LM/W	Voltage	DC48V




**Control system**

- ON/OFF
- 0-10V
- Bluetooth
- Dali dimming control
- Zigbee dimming control
- Triac dimming control
- Other dimming control

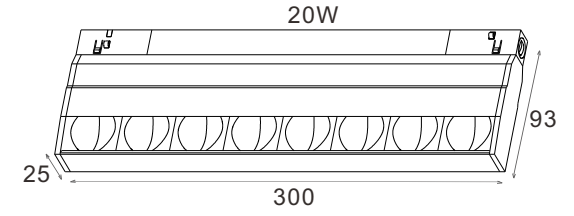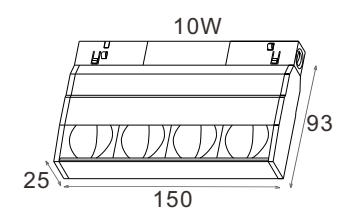





Model	HYD-miniLED30-6W		
Size	L125*W30*H65mm	Power	6W
Material	6063 aluminum	CCT	3000K/4000K/6000K/Dimmable
Housing color	White/Black/Other color	CRI	≥90
Protection class	IP20	Beam angle	24/50°
Intelligent dimming	Available	LED	OSRAM
Lumen	>80LM/W	Voltage	DC48V




Model	HYD-miniLED30-12W		
Size	L125*W30*H125mm	Power	12W
Material	6063 aluminum	CCT	3000K/4000K/6000K/Dimmable
Housing color	White/Black/Other color	CRI	≥90
Protection class	IP20	Beam angle	24/50°
Intelligent dimming	Available	LED	OSRAM
Lumen	>80LM/W	Voltage	DC48V



Model	HYD-miniLED30-18W		
Size	L185*W30*H125mm	Power	18W
Material	6063 aluminum	CCT	3000K/4000K/6000K/Dimmable
Housing color	White/Black/Other color	CRI	≥90
Protection class	IP20	Beam angle	24/50°
Intelligent dimming	Available	LED	OSRAM
Lumen	>80LM/W	Voltage	DC48V







Model	HYD-miniLED30-24W		
Size	L365*W30*H125mm	Power	24W
Material	6063 aluminum	CCT	3000K/4000K/6000K/Dimmable
Housing color	White/Black/Other color	CRI	≥90
Protection class	IP20	Beam angle	24/50°
Intelligent dimming	Available	LED	OSRAM
Lumen	>80LM/W	Voltage	DC48V




Control system


- ON/OFF
- 0-10V
- Bluetooth
- Dali dimming control
- Zigbee dimming control
- Triac dimming control
- Other dimming control

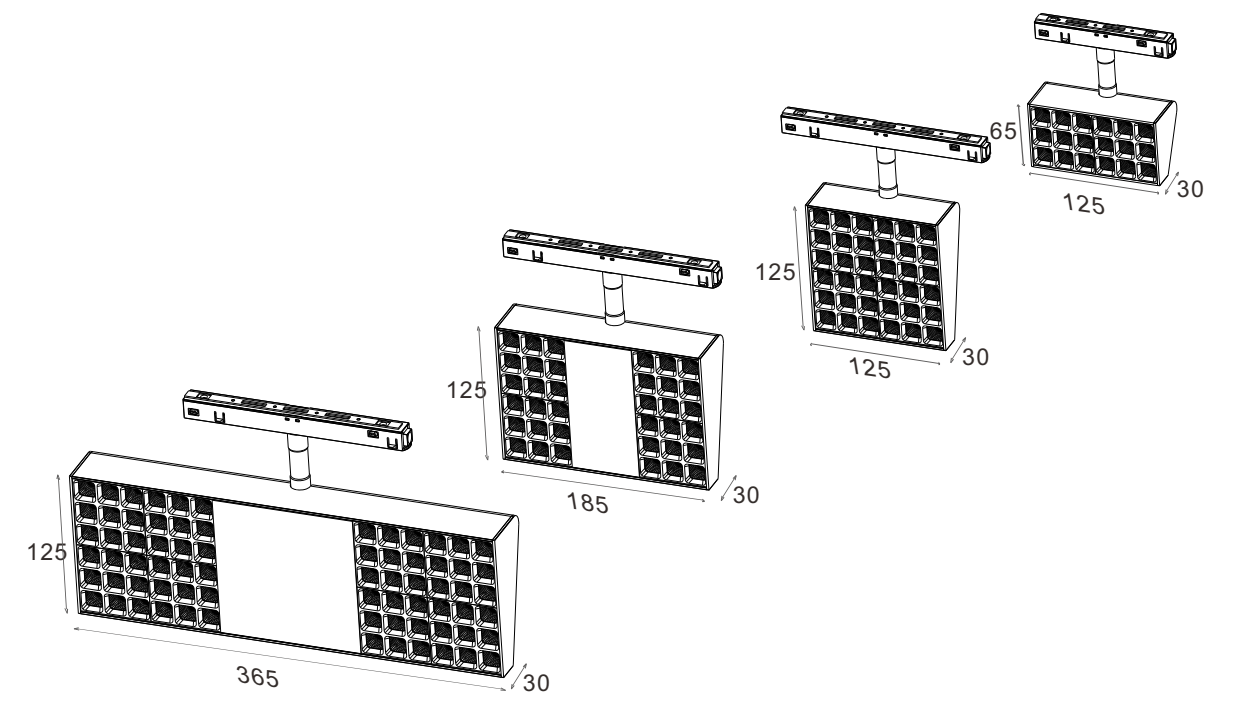



	<b>Model</b> HYD-miniLED10-5W	<b>Size</b> Ø45*H90mm	<b>Power</b> 5W
	<b>Material</b> 6063 aluminum	<b>CCT</b> 3000K/4000K/6000K/Dimmable	
	<b>Housing color</b> White/Black/Other color	<b>CRI</b> ≥90	
	<b>Protection class</b> IP20	<b>Beam angle</b> 15°/24°/38°	
	<b>Intelligent dimming</b> Available	<b>LED</b> OSRAM	
	<b>Lumen</b> >80LM/W	<b>Voltage</b> DC48V	



	<b>Model</b> HYD-miniLED10-10W	<b>Size</b> Ø45*H120mm	<b>Power</b> 10W
	<b>Material</b> 6063 aluminum	<b>CCT</b> 3000K/4000K/6000K/Dimmable	
	<b>Housing color</b> White/Black/Other color	<b>CRI</b> ≥90	
	<b>Protection class</b> IP20	<b>Beam angle</b> 15°/24°/38°	
	<b>Intelligent dimming</b> Available	<b>LED</b> OSRAM	
	<b>Lumen</b> >80LM/W	<b>Voltage</b> DC48V	




	<b>Model</b> HYD-miniLED10-15W	<b>Size</b> Ø45*H200mm	<b>Power</b> 15W
	<b>Material</b> 6063 aluminum	<b>CCT</b> 3000K/4000K/6000K/Dimmable	
	<b>Housing color</b> White/Black/Other color	<b>CRI</b> ≥90	
	<b>Protection class</b> IP20	<b>Beam angle</b> 15°/24°/38°	
	<b>Intelligent dimming</b> Available	<b>LED</b> OSRAM	
	<b>Lumen</b> >80LM/W	<b>Voltage</b> DC48V	




**Control system**

- ON/OFF
- 0-10V
- Dali dimming control
- Triac dimming control
- Other dimming control


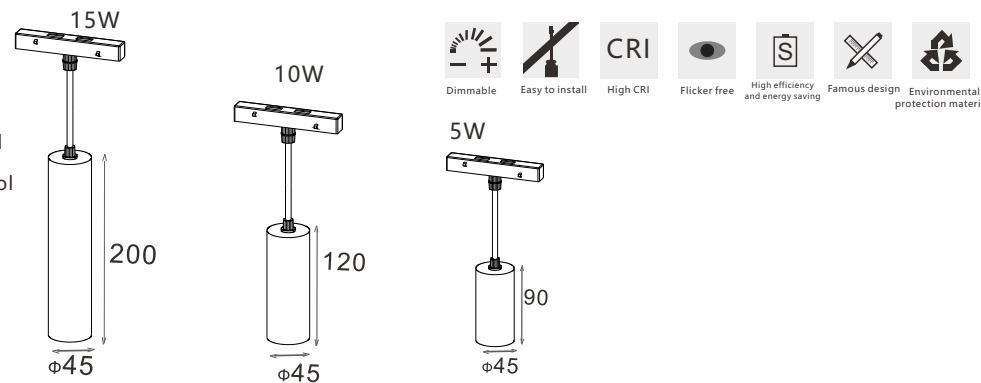


	<b>Model</b> HYD-miniLED09-7W	<b>Size</b> Ø30*见图mm	<b>Power</b> 7W
	<b>Material</b> 6063 aluminum	<b>CCT</b> 3000K/4000K/6000K/Dimmable	
	<b>Housing color</b> White/Black/Other color	<b>CRI</b> ≥90	
	<b>Protection class</b> IP20	<b>Beam angle</b> 10°/24°	
	<b>Intelligent dimming</b> Available	<b>LED</b> OSRAM	
	<b>Lumen</b> >80LM/W	<b>Voltage</b> DC48V	



**Control system**

- ON/OFF
- 0-10V
- Bluetooth
- Dali dimming control
- Zigbee dimming control
- Triac dimming control
- Other dimming control

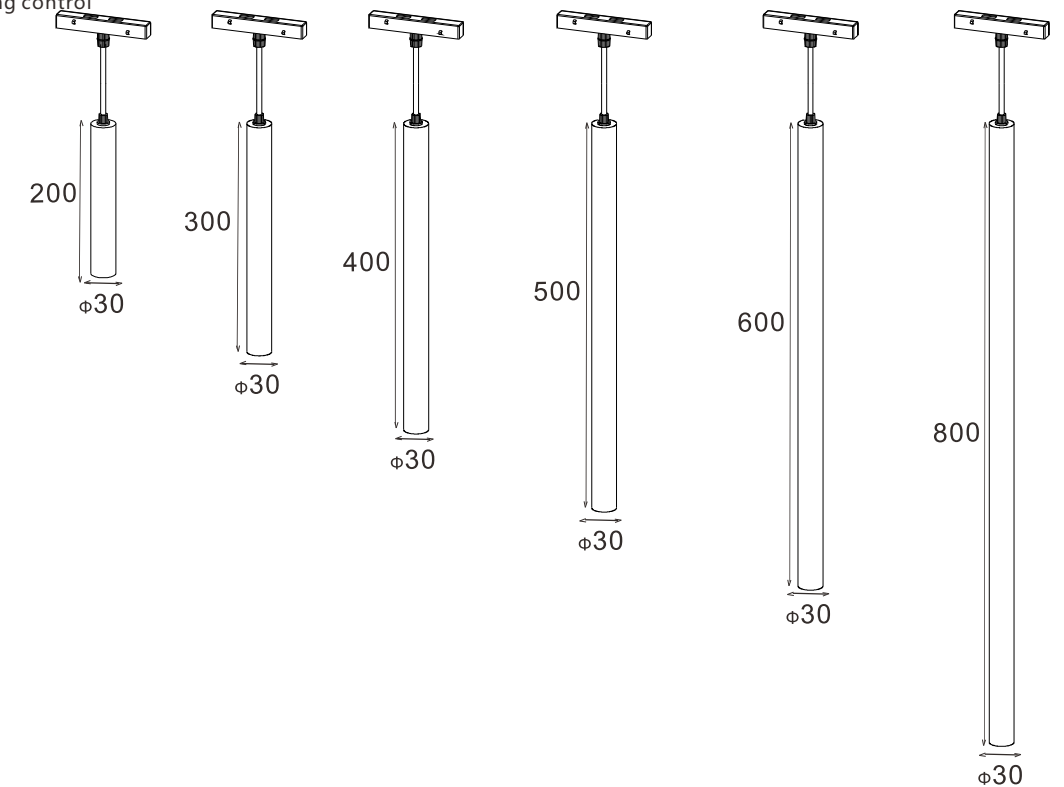




Decorative lighting


make home more warm



Model	HYD-miniLED26-12W		
Size	Ø90*H1000mm	Power	7W
Material	6063 aluminum	CCT	3000K/4000K/6000K/Dimmable
Housing color	White/Black/Other color	CRI	≥90
Protection class	IP20	Beam angle	180°
Intelligent dimming	Available	LED	OSRAM
Lumen	>80LM/W	Voltage	DC48V





Model	HYD-miniLED25-12W		
Size	Ø100*H1000mm	Power	12W
Material	6063 aluminum	CCT	3000K/4000K/6000K/Dimmable
Housing color	White/Black/Other color	CRI	≥90
Protection class	IP20	Beam angle	180°
Intelligent dimming	Available	LED	OSRAM
Lumen	>80LM/W	Voltage	DC48V



Control system

- ON/OFF
  - 0-10V
  - Bluetooth
  - Dali dimming control
  - Zigbee dimming control
  - Triac dimming control
  - Other dimming control
- Multicolor and selection

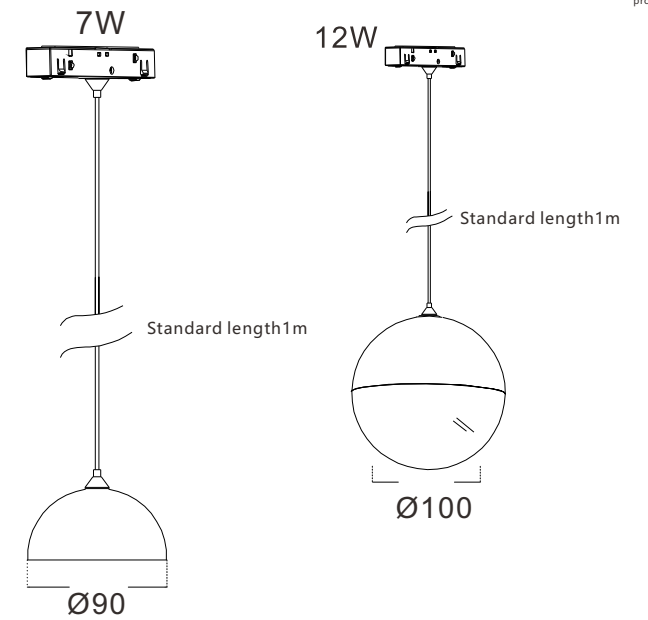




## Northern Europe style pendant lamp

| magnetic design | ceiling design | Multi color options |

Life needs no tedious refinement

Let light be everywhere




Bean paste red

Sapphire blue


Titanium ash



ceiling design

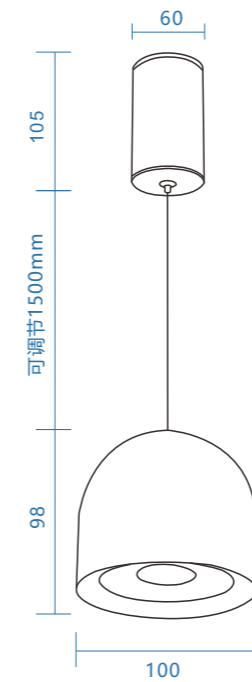

Magnetic design

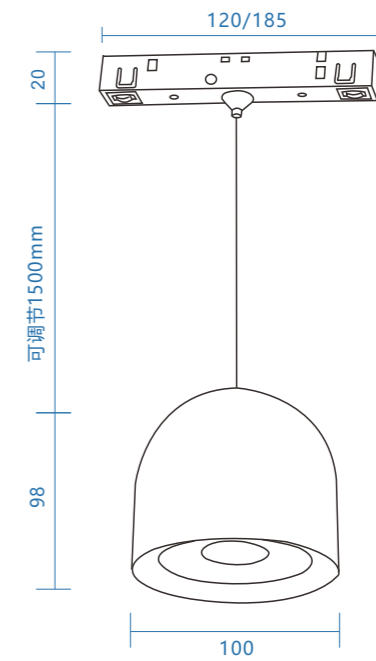

### Parameter details

Model No.	HYD-MD001-10W
Installation mode	magnetic/ceiling
Size	Ø100*H98MM
CRI	≥90
Voltage	220V/48V

Power	10W
LED chip	OSRAM
Housing color	Bean paste red/Sapphire blue/Titanium ash
Lumen	80LM/W
Beam angle	15°/24°/36°




## Northern Europe style pendant lamp


| magnetic design | ceiling design | Multi color options |

Life needs no tedious refinement


Let light be everywhere

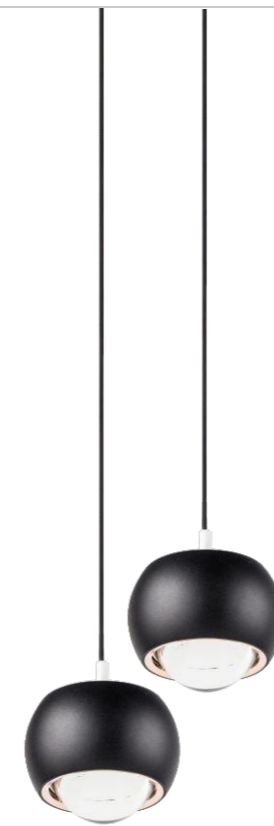

### ceiling design

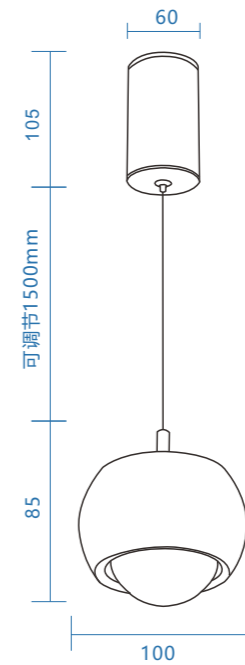

### Magnetic design

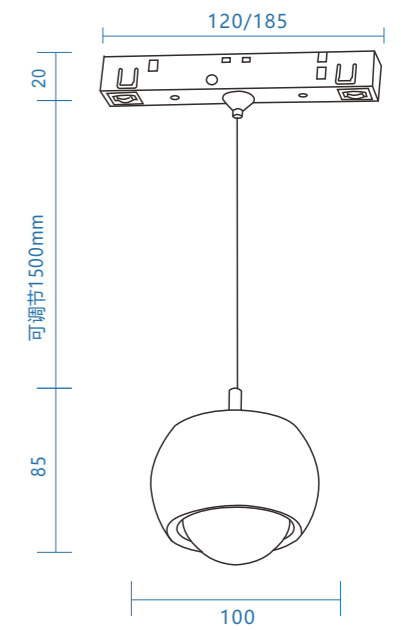

#### Parameter details

Model No.	HYD-MD002-10W
Installation mode	magnetic/ceiling
Size	Ø100*H85MM
CRI	≥90
Voltage	220V/48V

Power	10W
LED chip	OSRAM
Housing color	Sandy black
Lumen	80LM/W
Beam angle	15°/24°/36°




### Northern Europe style pendant lamp

| magnetic design | ceiling design | Multi color options |


Life needs no tedious refinement

Let light be everywhere

### ceiling design

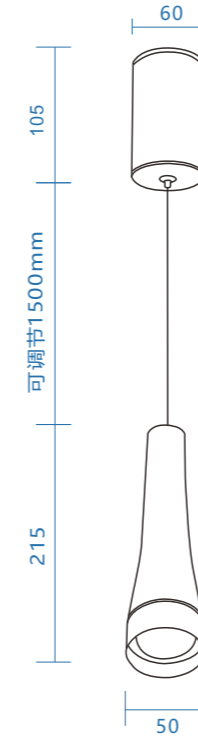

### Magnetic design

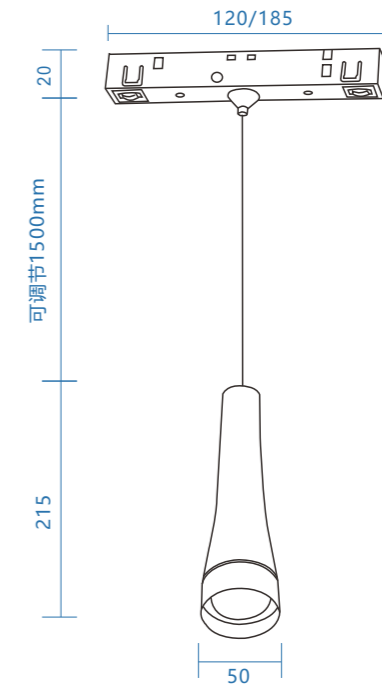

#### Parameter details

Model No.	HYD-MD003-10W
Installation mode	magnetic/ceiling
Size	Ø50*H215MM
CRI	≥90
Voltage	220V/48V

Power	10W
LED chip	OSRAM
Housing color	Titanium ash
Lumen	80LM/W
Beam angle	15°/24°/36°

## Northern Europe style pendant lamp


| magnetic design | ceiling design | Multi color options |

Life needs no tedious refinement


Let light be everywhere




### 7Wceiling design

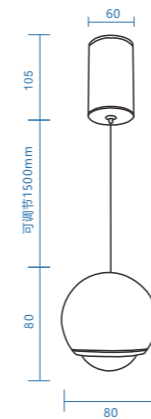


### 10Wceiling design

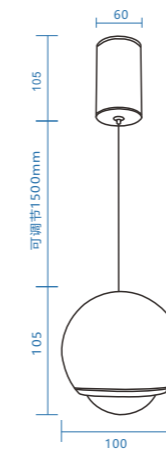

### 7WMagnetic design

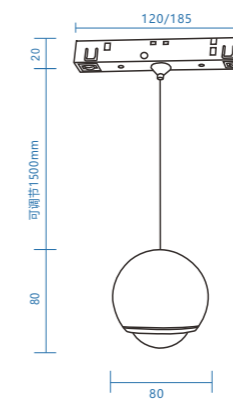

### 10WMagnetic design

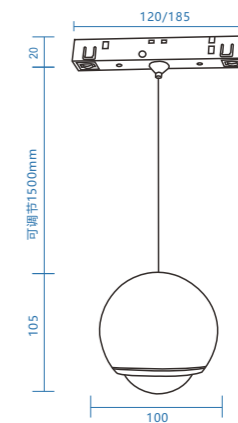

#### Parameter details

Model No. HYD-MD004-7W

Installation mode magnetic/ceiling

Size Ø80\*H80MM

CRI ≥90

Voltage 220V/48V

Power 7W

LED chip OSRAM

Housing color black / gold

Lumen 80LM/W

Beam angle 15°/24°/36°

#### Parameter details

Model No. HYD-MD004-10W

Installation mode magnetic/ceiling

Size Ø100\*H105MM

CRI ≥90

Voltage 220V/48V

Power 10W

LED chip OSRAM

Housing color Black+Gold

Lumen 80LM/W

Beam angle 15°/24°/36°





## Northern Europe style pendant lamp


| magnetic design | ceiling design | Multi color options |

Life needs no tedious refinement


Let light be everywhere



### ceiling design

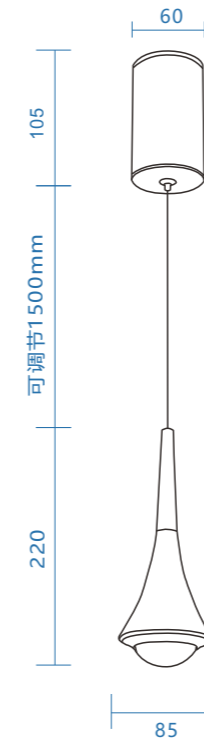

### Magnetic design

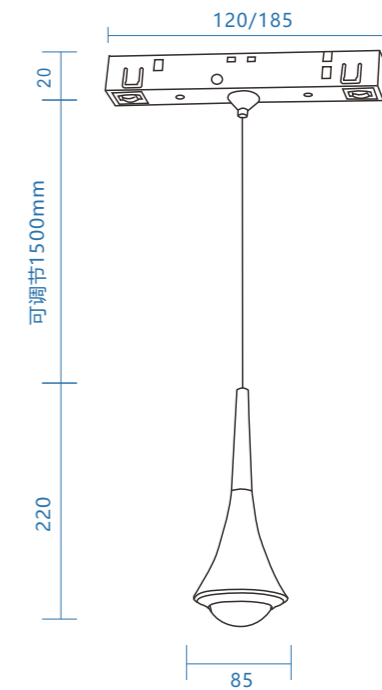

#### Parameter details


Model No.	HYD-MD005-10W
Installation mode	magnetic/ceiling
Size	Ø85*H220MM
CRI	≥90
Voltage	220V/48V

Power	10W
LED chip	OSRAM
Housing color	Titanium ash+gold
Lumen	80LM/W
Beam angle	15°/24°/36°



Bedroom area  
Light and art coexist, simple life

Use lines and surfaces to create a sense of space Use lines and surfaces to create a sense of space

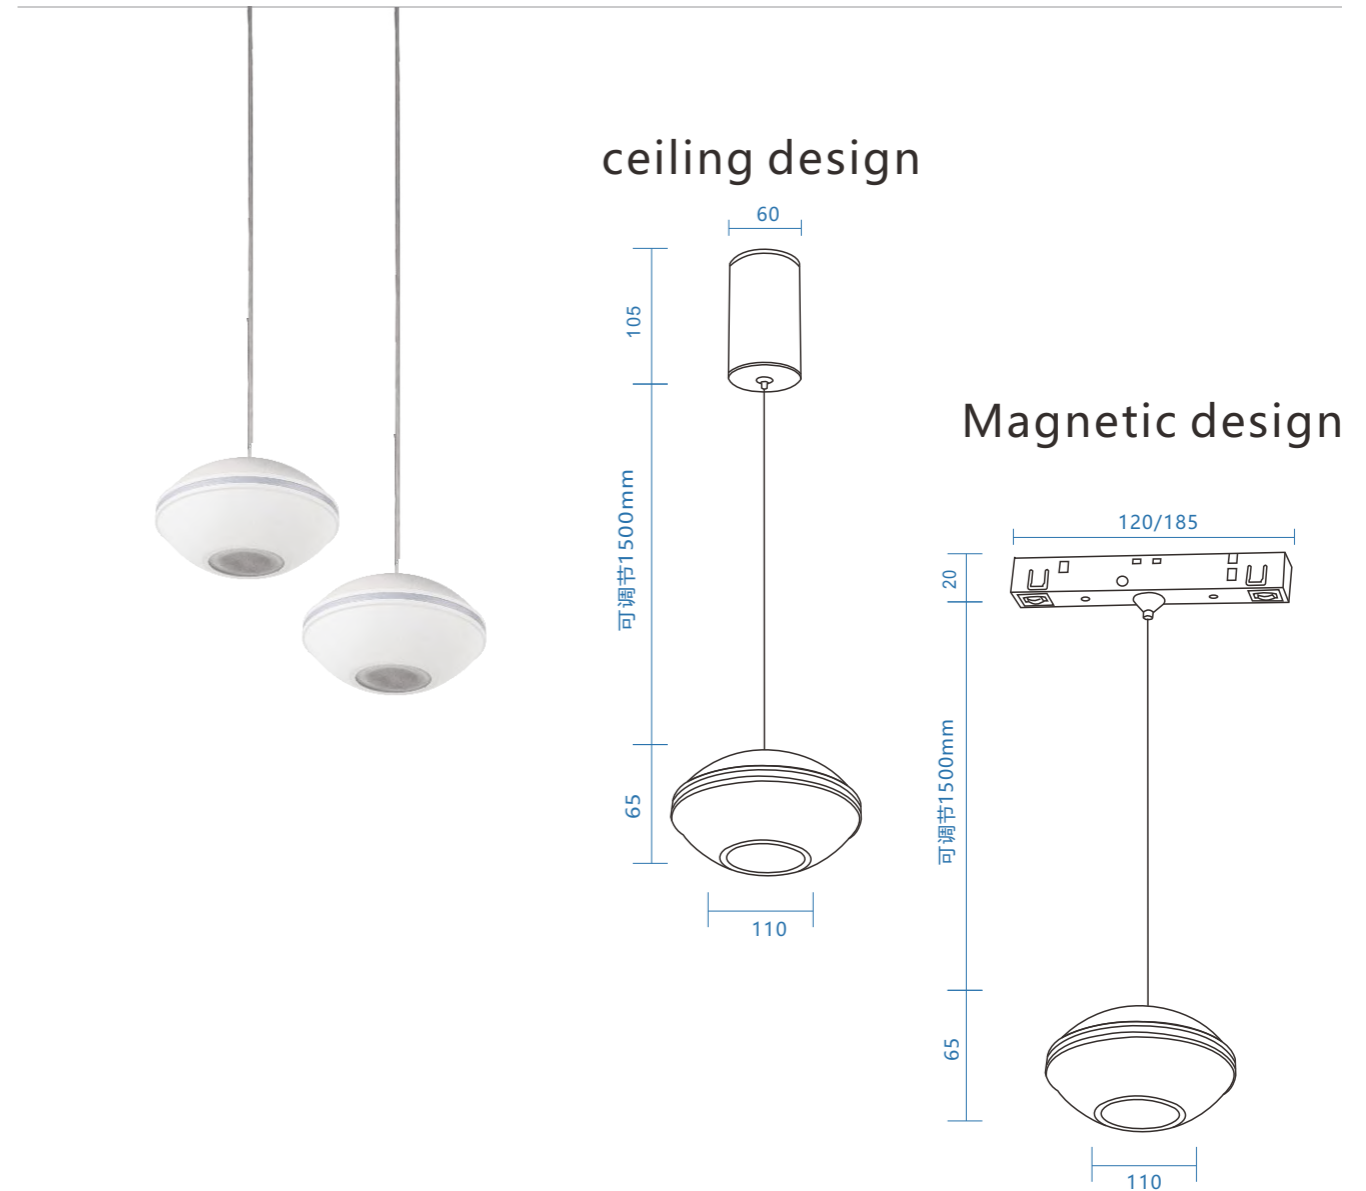

Parameter details

Model No.	HYD-MD006-10W
Installation mode	magnetic/ceiling
Size	Ø110*H65MM
CRI	≥90
Voltage	220V/48V

Power	10W
LED chip	OSRAM
Housing color	Matt white
Lumen	80LM/W
Beam angle	15°/24°/36°



## R16 Series



hanging/surface mounted  
HYDR16-F16




Adjust wing to be recessed  
(before ceiling suspended)  
HYDR16-F16



Adjust wing to be recessed  
(after ceiling suspended)  
HYDR16-F16



hanging/surface mounted/recessed

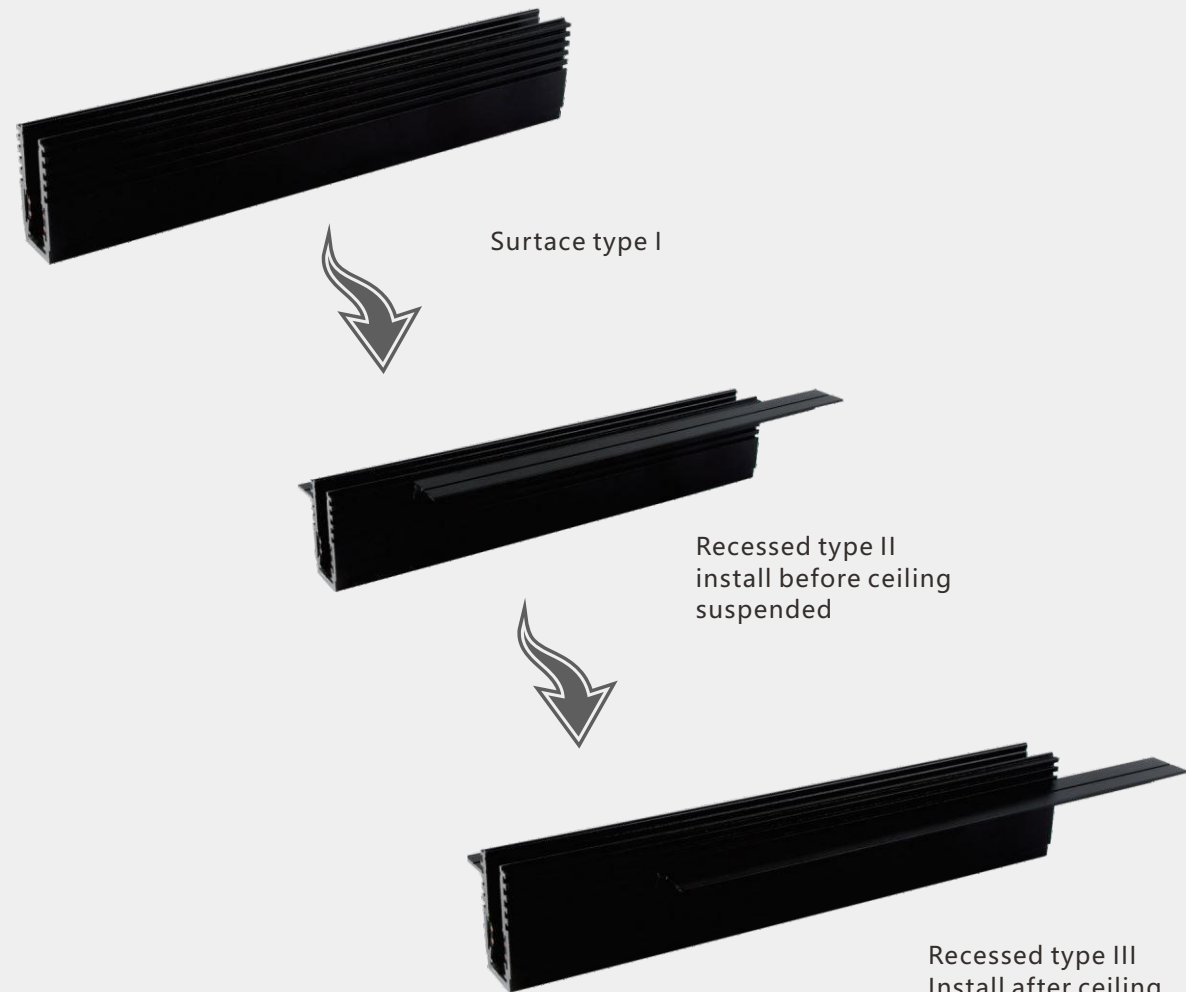

Suitable for 5mm . 9mm 12mm . 8mm board . flexible and convenie

Recessed type III  
Install after ceiling  
suspended

**Specification**

- Extruded aluminum profiles; ●For wall/ceiling surface mounting or suspension mounting
- The height is self-adjusting. ●Black splices are used for continuous lighting systems ,
- 90 degree Angle connectors are used for flexible system design;
- Surface spray color: black/white/Other color;
- Flexible installation without tools, magnetic support + locking: ●Protection class IP 20;
- Outer power supply or built-in power supply;
- Choose from non-dimming, 0-10V dimming, Bluetooth or Dali dimmable system;

**R16series** One rail is multi-purpose

Model: HYDR16-F16

installation: hanging/surface mounted/recessed

Size: surface mountedW29\*H49mm

recessedW70\*H49mm

cut-out Size: W35-40mm

Size: L100/2000/3000

material: aluminum





Housing color: matte black

/matte white /customization

Protection class : IP20


Replaceable fixing plate

Track section Size drawing (mm)

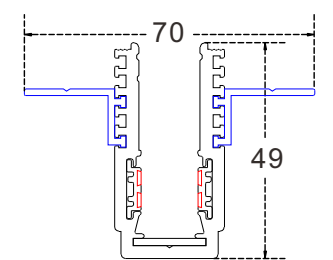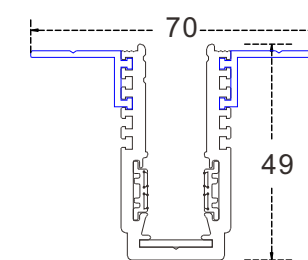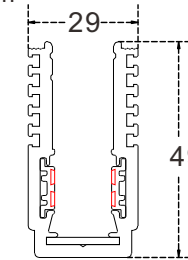


**installation**


Keel embedded type

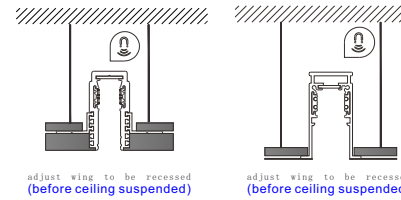

Wooden box embedded type

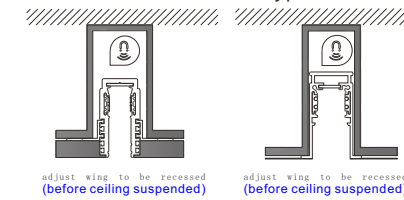

hanging/surface mounted

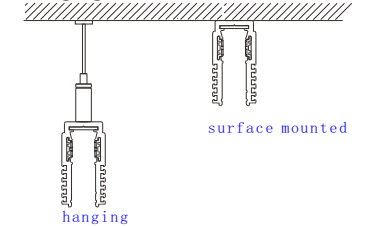

**install accessories**

picture	name	drawing	Size(MM)	picture	name	drawing	Size(MM)
	outer L rail connector		100*100		inner L rail connector		100*100
	90°T rail connector		160*115		90°+ rail connector		160*160
	end cap		35*50		connect kits		23*105
	suspended wires		2000		input adaptor		90
	recessed rail l adaptor		18*90		90° L rail adaptor		90
	T rail adaptor		90		built-in power supply		23*230
	200W outer power supply		115*215				

# 5 R16 Series



linear flood light  
HYDR1601



Dot series  
HYDR1602



Folding linear flood light  
HYDR1603



Folding Dot series  
HYDR1604




Curve track light  
HYDR1605




## R16linear flood light




Model	HYDR1601-6W		
Size	L104*W16*H41mm	Power	6W
Material	6063 aluminum	CCT	3000K/4000K/6000K/Dimmable
Housing color	Black/White/other color	CRI	≥90
IP rate	IP20	Beam angle	120°
Intelligent dimming	YES	LED	OSRAM
Lumen	>80LM/W	Voltage	DC48V




Model	HYDR1601-8W		
Size	L204*W16*H41mm	Power	8W
Material	6063 aluminum	CCT	3000K/4000K/6000K/Dimmable
Housing color	Black/White/other color	CRI	≥90
IP rate	IP20	Beam angle	120°
Intelligent dimming	YES	LED	OSRAM
Lumen	>80LM/W	Voltage	DC48V



Model	HYDR1601-10W		
Size	L304*W16*H41mm	Power	10W
Material	6063 aluminum	CCT	3000K/4000K/6000K/Dimmable
Housing color	Black/White/other color	CRI	≥90
IP rate	IP20	Beam angle	120°
Intelligent dimming	YES	LED	OSRAM
Lumen	>80LM/W	Voltage	DC48V




Model	HYDR1601-12W		
Size	L404*W16*H41mm	Power	15W
Material	6063 aluminum	CCT	3000K/4000K/6000K/Dimmable
Housing color	Black/White/other color	CRI	≥90
IP rate	IP20	Beam angle	120°
Intelligent dimming	YES	LED	OSRAM
Lumen	>80LM/W	Voltage	DC48V




## R16linear flood light



Model	HYDR1601-15W		
Size	L604*W16*H41mm	Power	15W
Material	6063 aluminum	CCT	3000K/4000K/6000K/Dimmable
Housing color	Black/White/other color	CRI	≥90
IP rate	IP20	Beam angle	120°
Intelligent dimming	YES	LED	OSRAM
Lumen	>80LM/W	Voltage	DC48V






Model	HYDR1601-22W		
Size	L804*W16*H41mm	Power	22W
Material	6063 aluminum	CCT	3000K/4000K/6000K/Dimmable
Housing color	Black/White/other color	CRI	≥90
IP rate	IP20	Beam angle	120°
Intelligent dimming	YES	LED	OSRAM
Lumen	>80LM/W	Voltage	DC48V





### Control system

- ON/OFF
- 0-10V
- Bluetooth
- Dali dimming control
- Zigbee dimming control
- Triac dimming control
- Other dimming control

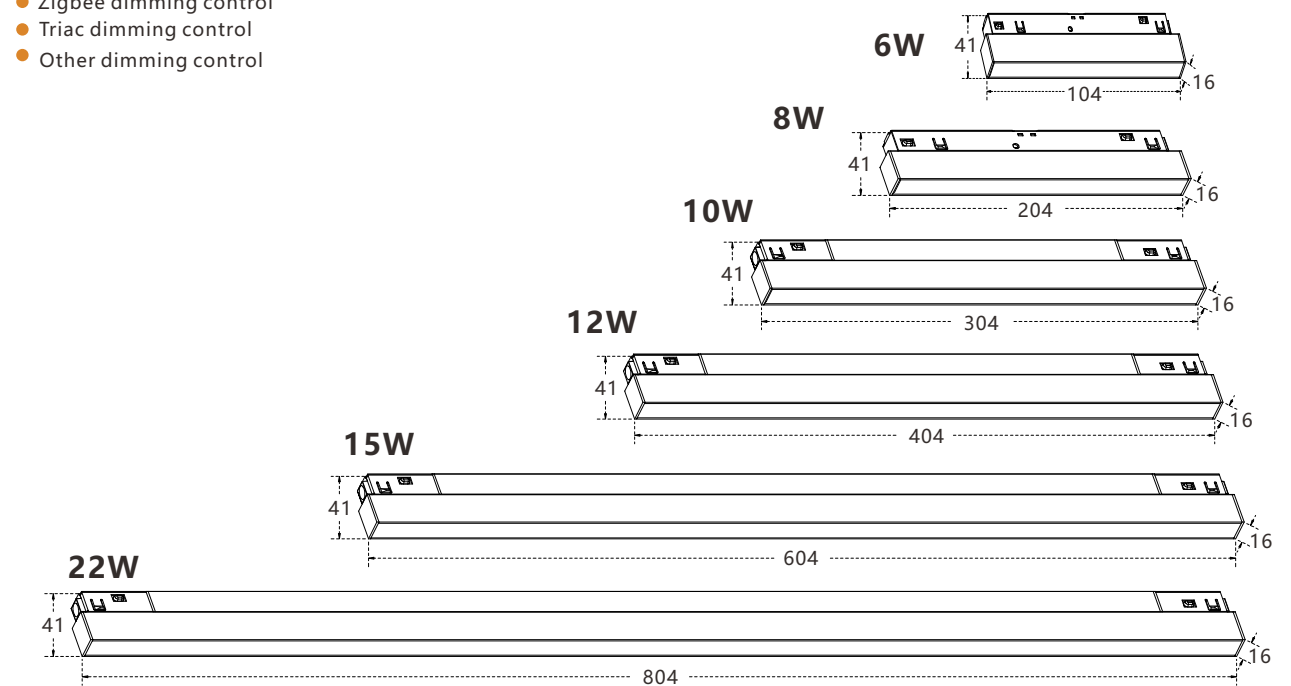







Model	HYDR1602-6W		
Size	L104*W16*H41mm	Power	6W
Material	6063 aluminum	CCT	3000K/4000K/6000K/Dimmable
Housing color	Black/White/other color	CRI	≥90
IP rate	IP20	Beam angle	30°
Intelligent dimming	YES	LED	OSRAM
Lumen	>80LM/W	Voltage	DC48V



Model	HYDR1602-8W		
Size	L204*W16*H41mm	Power	8W
Material	6063 aluminum	CCT	3000K/4000K/6000K/Dimmable
Housing color	Black/White/other color	CRI	≥90
IP rate	IP20	Beam angle	30°
Intelligent dimming	YES	LED	OSRAM
Lumen	>80LM/W	Voltage	DC48V



Model	HYDR1602-10W		
Size	L304*W16*H41mm	Power	10W
Material	6063 aluminum	CCT	3000K/4000K/6000K/Dimmable
Housing color	Black/White/other color	CRI	≥90
IP rate	IP20	Beam angle	30°
Intelligent dimming	YES	LED	OSRAM
Lumen	>80LM/W	Voltage	DC48V


Model	HYDR1602-12W		
Size	L404*W16*H41mm	Power	12W
Material	6063 aluminum	CCT	3000K/4000K/6000K/Dimmable
Housing color	Black/White/other color	CRI	≥90
IP rate	IP20	Beam angle	30°
Intelligent dimming	YES	LED	OSRAM
Lumen	>80LM/W	Voltage	DC48V

Model	HYDR1602-15W		
Size	L604*W16*H41mm	Power	15W
Material	6063 aluminum	CCT	3000K/4000K/6000K/Dimmable
Housing color	Black/White/other color	CRI	≥90
IP rate	IP20	Beam angle	30°
Intelligent dimming	YES	LED	OSRAM
Lumen	>80LM/W	Voltage	DC48V







Model	HYDR1602-22W		
Size	L804*W16*H41mm	Power	22W
Material	6063 aluminum	CCT	3000K/4000K/6000K/Dimmable
Housing color	Black/White/other color	CRI	≥90
IP rate	IP20	Beam angle	30°
Intelligent dimming	YES	LED	OSRAM
Lumen	>80LM/W	Voltage	DC48V





### Control system

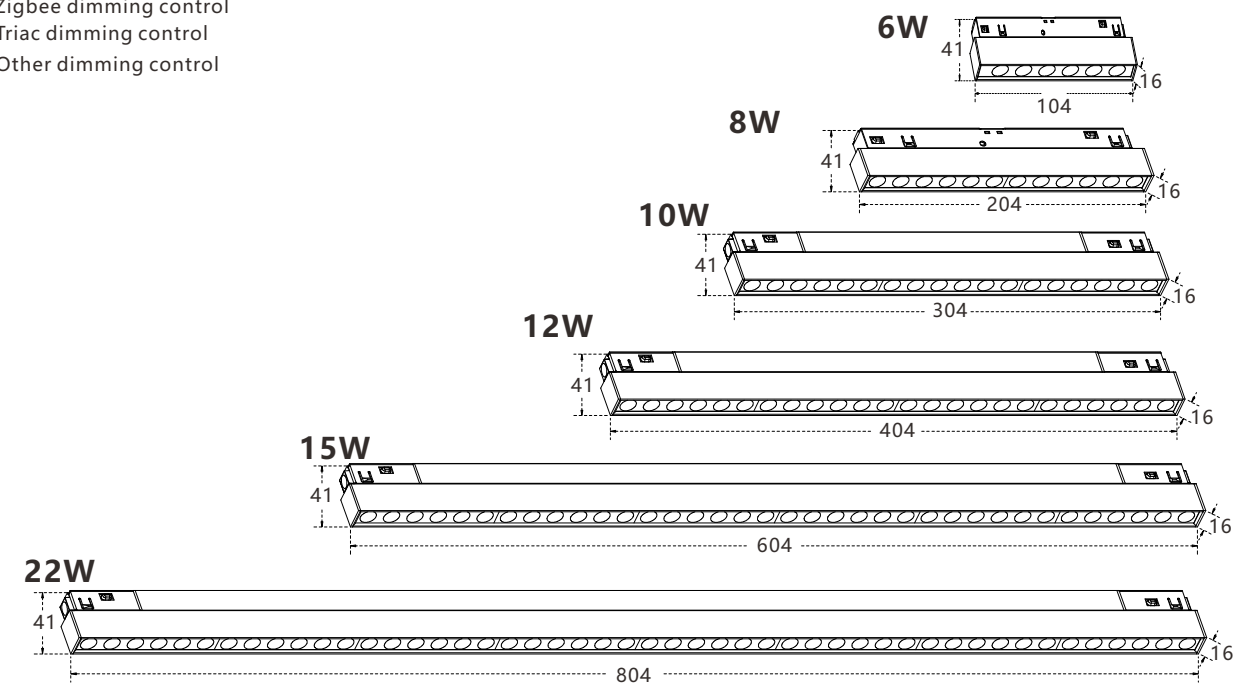- ON/OFF
- 0-10V
- Bluetooth
- Dali dimming control
- Zigbee dimming control
- Triac dimming control
- Other dimming control








Model	HYDR1603-5W		
Size	L104*W16*H100mm	Power	5W
Material	6063 aluminum	CCT	3000K/4000K/6000K/Dimmable
Housing color	Black/White/other color	CRI	≥90
IP rate	IP20	Beam angle	120°
Intelligent dimming	YES	LED	OSRAM
Lumen	>80LM/W	Voltage	DC48V

Model	HYDR1603-10W		
Size	L204*W16*H100mm	Power	10W
Material	6063 aluminum	CCT	3000K/4000K/6000K/Dimmable
Housing color	Black/White/other color	CRI	≥90
IP rate	IP20	Beam angle	120°
Intelligent dimming	YES	LED	OSRAM
Lumen	>80LM/W	Voltage	DC48V







Model	HYDR1603-12W		
Size	L304*W16*H100mm	Power	12W
Material	6063 aluminum	CCT	3000K/4000K/6000K/Dimmable
Housing color	Black/White/other color	CRI	≥90
IP rate	IP20	Beam angle	120°
Intelligent dimming	YES	LED	OSRAM
Lumen	>80LM/W	Voltage	DC48V





Control system

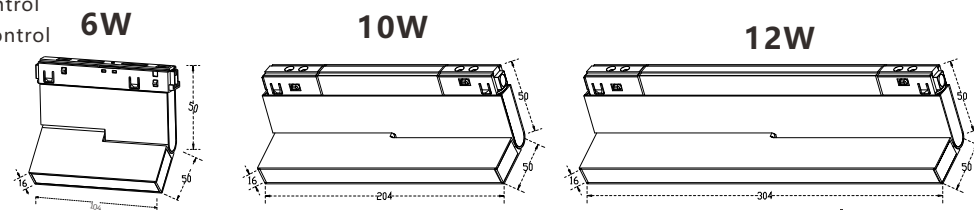

- ON/OFF
- 0-10V
- Bluetooth
- Dali dimming control
- Zigbee dimming control
- Triac dimming control
- Other dimming control


Model	HYDR1604-5WHYD		
Size	L104*W16*H100mm	Power	5W
Material	6063 aluminum	CCT	3000K/4000K/6000K/Dimmable
Housing color	Black/White/other color	CRI	≥90
IP rate	IP20	Beam angle	30°
Intelligent dimming	YES	LED	OSRAM
Lumen	>80LM/W	Voltage	DC48V

Model	HYDR1604-10W		
Size	L204*W16*H100mm	Power	10W
Material	6063 aluminum	CCT	3000K/4000K/6000K/Dimmable
Housing color	Black/White/other color	CRI	≥90
IP rate	IP20	Beam angle	30°
Intelligent dimming	YES	LED	OSRAM
Lumen	>80LM/W	Voltage	DC48V






Model	HYDR1604-12W		
Size	L304*W16*H100mm	Power	12W
Material	6063 aluminum	CCT	3000K/4000K/6000K/Dimmable
Housing color	Black/White/other color	CRI	≥90
IP rate	IP20	Beam angle	30°
Intelligent dimming	YES	LED	OSRAM
Lumen	>80LM/W	Voltage	DC48V



Control system


- ON/OFF
- 0-10V
- Bluetooth
- Dali dimming control
- Zigbee dimming control
- Triac dimming control
- Other dimming control

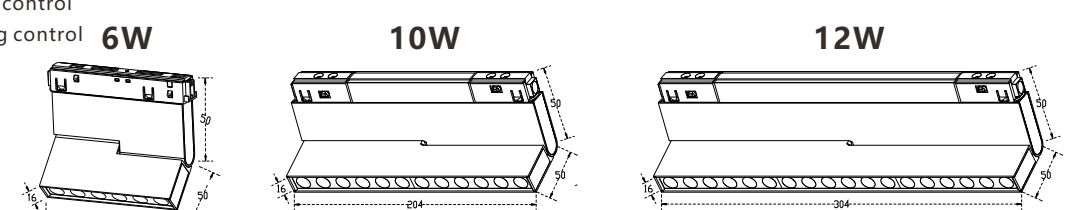







Model	HYDR1605-3W		
Size	Φ25*50mm	Power	3W
Material	6063 aluminum	CCT	3000K/4000K/6000K/Dimmable
Housing color	Black/White/other color	CRI	≥90
IP rate	IP20	Beam angle	15°/24°/36°
Intelligent dimming	YES	LED	OSRAM
Lumen	>80LM/W	Voltage	DC48V




Model	HYDR1605-5W		
Size	Φ40*85mm	Power	5W
Material	6063 aluminum	CCT	3000K/4000K/6000K/Dimmable
Housing color	Black/White/other color	CRI	≥90
IP rate	IP20	Beam angle	15°/24°/36°
Intelligent dimming	YES	LED	OSRAM
Lumen	>80LM/W	Voltage	DC48V




Model	HYDR1605-7W		
Size	Φ45*110mm	Power	7W
Material	6063 aluminum	CCT	3000K/4000K/6000K/Dimmable
Housing color	Black/White/other color	CRI	≥90
IP rate	IP20	Beam angle	15°/24°/36°
Intelligent dimming	YES	LED	OSRAM
Lumen	>80LM/W	Voltage	DC48V




Model	HYDR1605-10W		
Size	Φ55*125mm	Power	10W
Material	6063 aluminum	CCT	3000K/4000K/6000K/Dimmable
Housing color	Black/White/other color	CRI	≥90
IP rate	IP20	Beam angle	15°/24°/36°
Intelligent dimming	YES	LED	OSRAM
Lumen	>80LM/W	Voltage	DC48V



Model	HYDR1605-15W		
Size	Φ65*135mm	Power	15W
Material	6063 aluminum	CCT	3000K/4000K/6000K/Dimmable
Housing color	Black/White/other color	CRI	≥90
IP rate	IP20	Beam angle	15°/24°/36°
Intelligent dimming	YES	LED	OSRAM
Lumen	>80LM/W	Voltage	DC48V





Model	HYDR1605-20W		
Size	Φ75*135mm	Power	20W
Material	6063 aluminum	CCT	3000K/4000K/6000K/Dimmable
Housing color	Black/White/other color	CRI	≥90
IP rate	IP20	Beam angle	15°/24°/36°
Intelligent dimming	YES	LED	OSRAM
Lumen	>80LM/W	Voltage	DC48V



**Control system**

- ON/OFF
- 0-10V
- Bluetooth
- Dali dimming control
- Zigbee dimming control
- Triac dimming control
- Other dimming control

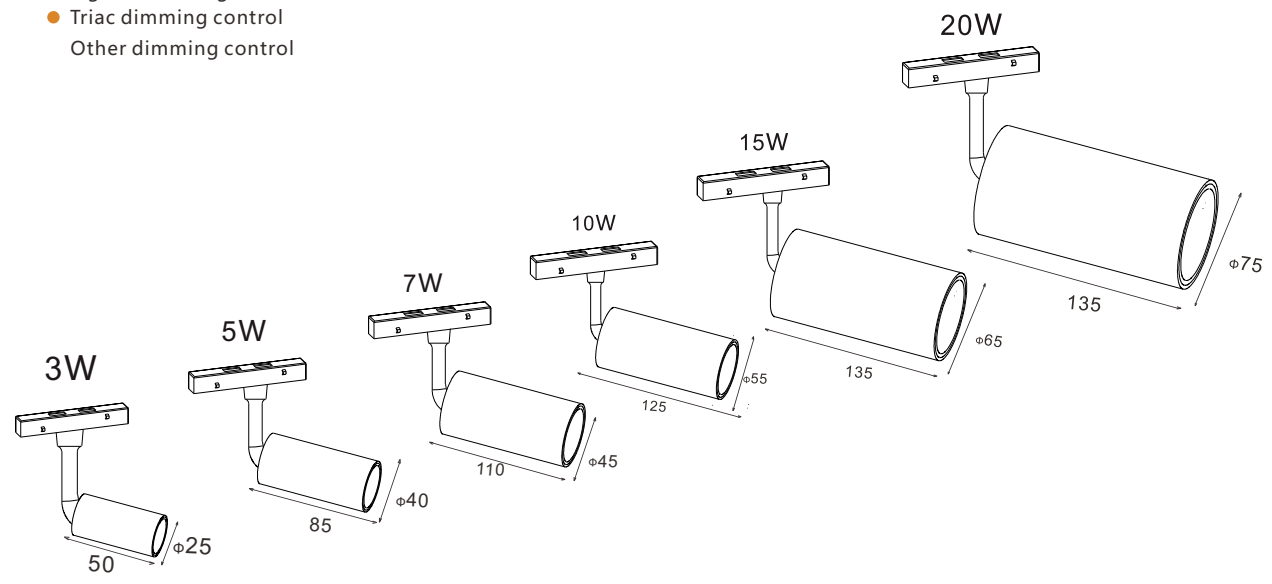



## R12 Series



hanging/surface mounted  
HYDR12-F12




Adjust wing to be recessed  
(before ceiling suspended)  
HYDR12-F12



Adjust wing to be recessed  
(after ceiling suspended)  
HYDR12-F12



hanging/surface mounted/recessed

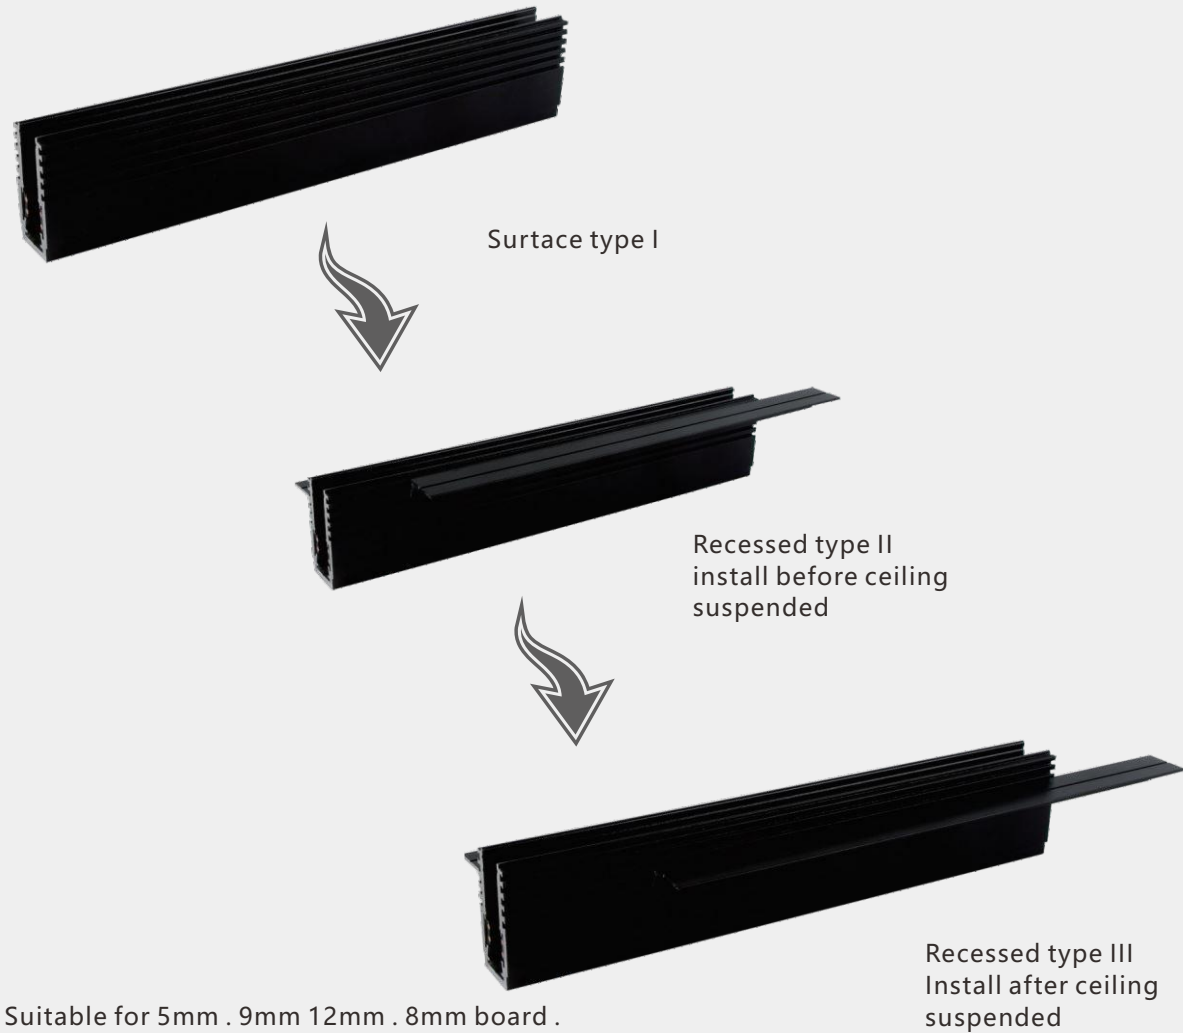

Specification

- Extruded aluminum profiles; ●For wall/ceiling surface mounting or suspension mounting
- The height is self-adjusting. ●Black splices are used for continuous lighting systems ,
- 90 degree Angle connectors are used for flexible system design;
- Surface spray color: black/white/Other color;
- Flexible installation without tools, magnetic support + locking: ●Protection class IP 20;
- Outer power supply or built-in power supply;
- Choose from non-dimming, 0-10V dimming, Bluetooth or Dali dimmable system;

R12series One rail is multi-purpose

Model: HYDR12-F12

installation: hanging/surface mounted/recessed

Size: surface mountedW25\*H49mm

recessedW67\*H49mm

cut-out Size: W30-35mm

Size: L100/2000/3000


material: aluminum

Housing color: matte black

/matte white /customization


Protection class : IP20

Replaceable fixing plate Track section Size drawing (mm)

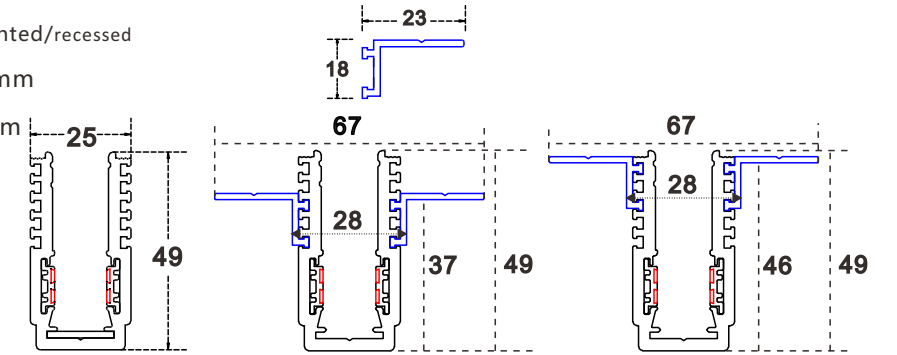


installation


Keel embedded type

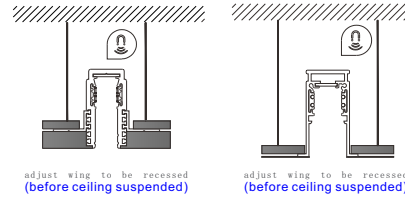

Wooden box embedded type

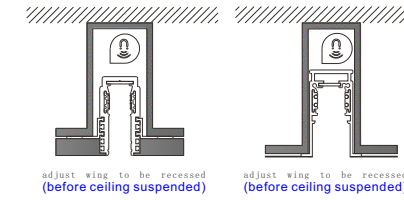

hanging/surface mounted

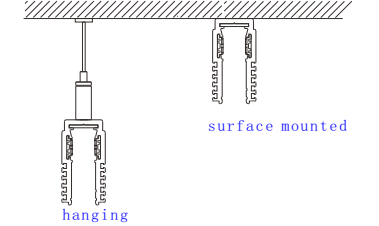

install accessories

picture	name	drawing	Size(MM)	picture	name	drawing	Size(MM)
	outer L rail connector		100*100		inner L rail connector		100*100
	90°T rail connector		160*115		90°+ rail connector		160*160
	end cap		35*50		connect kits		23*105
	suspended wires		2000		input adaptor		90
	recessed rail l adaptor		18*90		90° L rail adaptor		90
	T rail adaptor		90		built-in power supply		23*230
	200W outer power supply		115*215				

# 7 R12 Series



linear flood light  
HYDR1201



Dot series  
HYDR1202



Folding linear flood light  
HYDR1203



Folding Dot series  
HYDR1204




Curve track light  
HYDR1205





pendant light  
HYDR1206





## R12linear flood light


	<b>Model</b> HYDR1201-5W	<b>Power</b> 5W
	<b>Size</b> L147*W13*H44mm	<b>CCT</b> 3000K/4000K/6000K/Dimmable
	<b>Material</b> 6063 aluminum	<b>CRI</b> ≥90
	<b>Housing color</b> Black/White/other color	<b>Beam angle</b> 120°
	<b>IP rate</b> IP20	<b>Intelligent dimming</b> YES
	<b>LED</b> OSRAM	<b>Lumen</b> >80LM/W
	<b>Voltage</b> DC48V	





	<b>Model</b> HYDR1201-8W	<b>Power</b> 8W
	<b>Size</b> L290*W13*H44mm	<b>CCT</b> 3000K/4000K/6000K/Dimmable
	<b>Material</b> 6063 aluminum	<b>CRI</b> ≥90
	<b>Housing color</b> Black/White/other color	<b>Beam angle</b> 120°
	<b>IP rate</b> IP20	<b>Intelligent dimming</b> YES
	<b>LED</b> OSRAM	<b>Lumen</b> >80LM/W
	<b>Voltage</b> DC48V	




	<b>Model</b> HYDR1201-12W	<b>Power</b> 12W
	<b>Size</b> L433*W13*H44mm	<b>CCT</b> 3000K/4000K/6000K/Dimmable
	<b>Material</b> 6063 aluminum	<b>CRI</b> ≥90
	<b>Housing color</b> Black/White/other color	<b>Beam angle</b> 120°
	<b>IP rate</b> IP20	<b>Intelligent dimming</b> YES
	<b>LED</b> OSRAM	<b>Lumen</b> >80LM/W
	<b>Voltage</b> DC48V	





	<b>Model</b> HYDR1201-15W	<b>Power</b> 15W
	<b>Size</b> L576*W13*H44mm	<b>CCT</b> 3000K/4000K/6000K/Dimmable
	<b>Material</b> 6063 aluminum	<b>CRI</b> ≥90
	<b>Housing color</b> Black/White/other color	<b>Beam angle</b> 120°
	<b>IP rate</b> IP20	<b>Intelligent dimming</b> YES
	<b>LED</b> OSRAM	<b>Lumen</b> >80LM/W
	<b>Voltage</b> DC48V	



## R12linear flood light

	<b>Model</b> HYDR1201-18W	<b>Power</b> 18W
	<b>Size</b> L862*W13*H44mm	<b>CCT</b> 3000K/4000K/6000K/Dimmable
	<b>Material</b> 6063 aluminum	<b>CRI</b> ≥90
	<b>Housing color</b> Black/White/other color	<b>Beam angle</b> 120°
	<b>IP rate</b> IP20	<b>Intelligent dimming</b> YES
	<b>LED</b> OSRAM	<b>Lumen</b> >80LM/W
	<b>Voltage</b> DC48V	





	<b>Model</b> HYDR1201-20W	<b>Power</b> 20W
	<b>Size</b> L1148*W13*H44mm	<b>CCT</b> 3000K/4000K/6000K/Dimmable
	<b>Material</b> 6063 aluminum	<b>CRI</b> ≥90
	<b>Housing color</b> Black/White/other color	<b>Beam angle</b> 120°
	<b>IP rate</b> IP20	<b>Intelligent dimming</b> YES
	<b>LED</b> OSRAM	<b>Lumen</b> >80LM/W
	<b>Voltage</b> DC48V	




### Control system

- ON/OFF

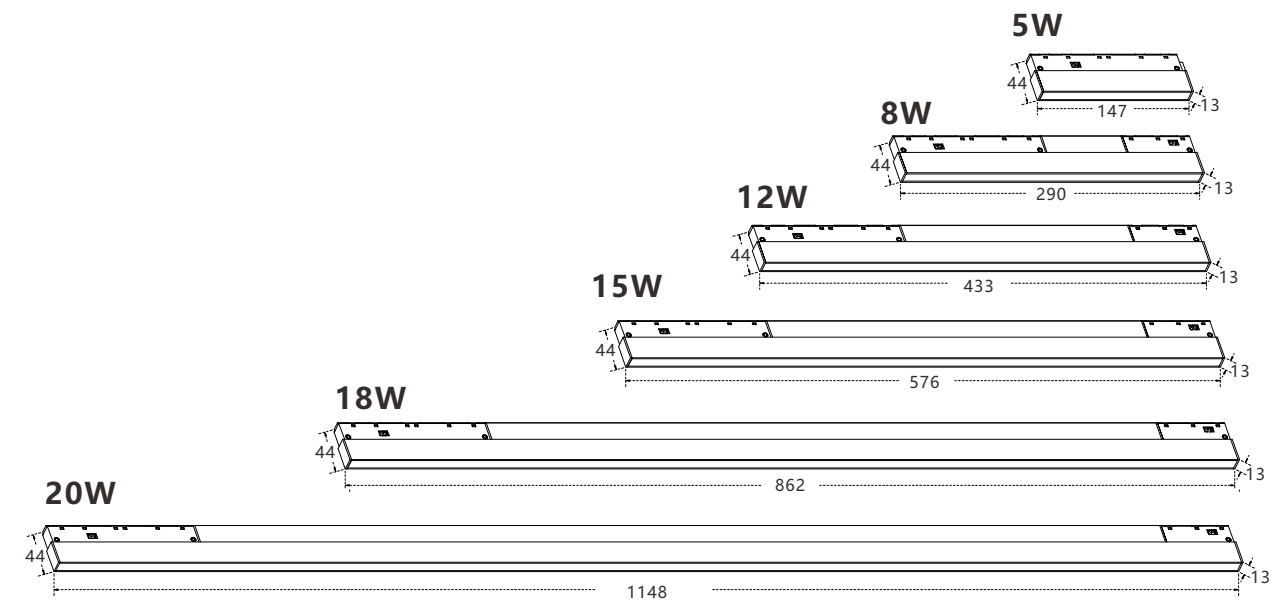





Model	HYDR1202-5W		
Size	L147*W13*H44mm	Power	5W
Material	6063 aluminum	CCT	3000K/4000K/6000K/Dimmable
Housing color	Black/White/other color	CRI	≥90
IP rate	IP20	Beam angle	24°
Intelligent dimming	YES	LED	OSRAM
Lumen	>80LM/W	Voltage	DC48V




Model	HYDR1202-8W		
Size	L290*W13*H44mm	Power	8W
Material	6063 aluminum	CCT	3000K/4000K/6000K/Dimmable
Housing color	Black/White/other color	CRI	≥90
IP rate	IP20	Beam angle	24°
Intelligent dimming	YES	LED	OSRAM
Lumen	>80LM/W	Voltage	DC48V




Model	HYDR1202-12W		
Size	L433*W13*H44mm	Power	12W
Material	6063 aluminum	CCT	3000K/4000K/6000K/Dimmable
Housing color	Black/White/other color	CRI	≥90
IP rate	IP20	Beam angle	24°
Intelligent dimming	YES	LED	OSRAM
Lumen	>80LM/W	Voltage	DC48V




Model	HYDR1202-15W		
Size	L576*W13*H44mm	Power	15W
Material	6063 aluminum	CCT	3000K/4000K/6000K/Dimmable
Housing color	Black/White/other color	CRI	≥90
IP rate	IP20	Beam angle	24°
Intelligent dimming	YES	LED	OSRAM
Lumen	>80LM/W	Voltage	DC48V



Model	YHYDR1202-18W		
Size	L862*W13*H44mm	Power	18W
Material	6063 aluminum	CCT	3000K/4000K/6000K/Dimmable
Housing color	Black/White/other color	CRI	≥90
IP rate	IP20	Beam angle	24°
Intelligent dimming	YES	LED	OSRAM
Lumen	>80LM/W	Voltage	DC48V





Model	HYDR1202-20W		
Size	L1148*W13*H44mm	Power	20W
Material	6063 aluminum	CCT	3000K/4000K/6000K/Dimmable
Housing color	Black/White/other color	CRI	≥90
IP rate	IP20	Beam angle	24°
Intelligent dimming	YES	LED	OSRAM
Lumen	>80LM/W	Voltage	DC48V




Control system

- ON/OFF

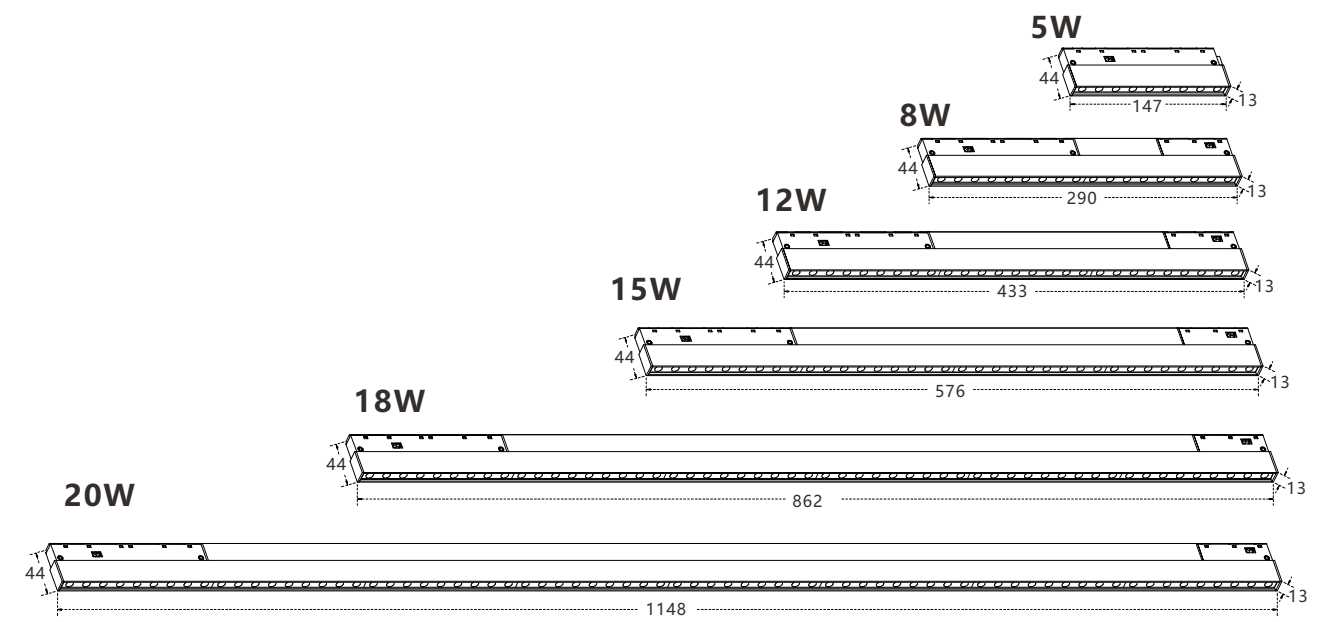




Model	HYDR1203-6W		
Size	L147*W13*H190mm	Power	6W
Material	6063 aluminum	CCT	3000K/4000K/6000K/Dimmable
Housing color	Black/White/other color	CRI	≥90
IP rate	IP20	Beam angle	120°
Intelligent dimming	YES	LED	OSRAM
Lumen	>80LM/W	Voltage	DC48V





Model	HYDR1203-12W		
Size	L290*W13*H190mm	Power	12W
Material	6063 aluminum	CCT	3000K/4000K/6000K/Dimmable
Housing color	Black/White/other color	CRI	≥90
IP rate	IP20	Beam angle	120°
Intelligent dimming	YES	LED	OSRAM
Lumen	>80LM/W	Voltage	DC48V




Control system


- ON/OFF
- 0-10V
- Bluetooth
- Dali dimming control
- Zigbee dimming control
- Triac dimming control
- Other dimming control

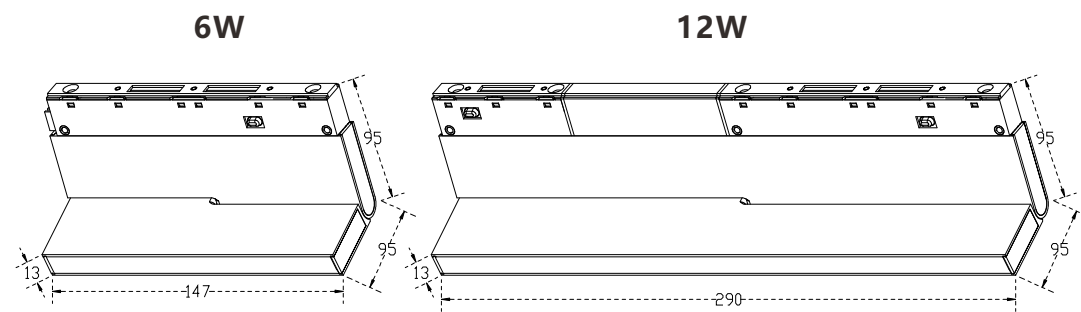

Model	HYDR1204-6W		
Size	L147*W13*H190mm	Power	20W
Material	6063 aluminum	CCT	3000K/4000K/6000K/Dimmable
Housing color	Black/White/other color	CRI	≥90
IP rate	IP20	Beam angle	24°
Intelligent dimming	YES	LED	OSRAM
Lumen	>80LM/W	Voltage	DC48V





Model	HYDR1204-12		
Size	L290*W13*H190mm	Power	12W
Material	6063 aluminum	CCT	3000K/4000K/6000K/Dimmable
Housing color	Black/White/other color	CRI	≥90
IP rate	IP20	Beam angle	24°
Intelligent dimming	YES	LED	OSRAM
Lumen	>80LM/W	Voltage	DC48V




Control system

- ON/OFF

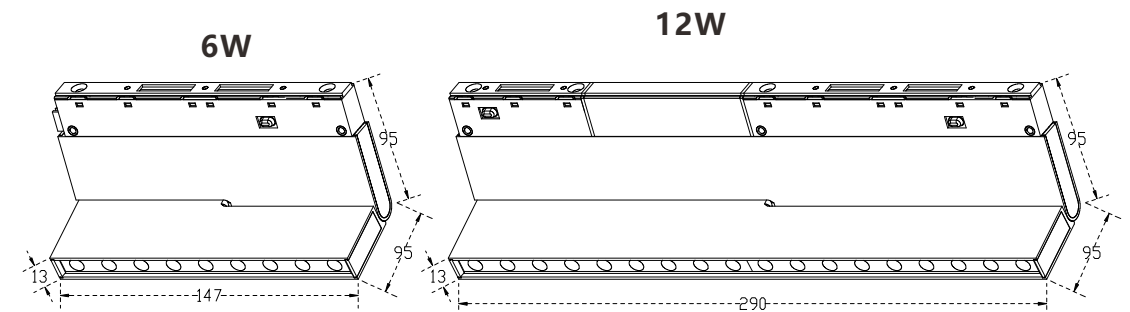





Model	HYDR1205-3W		
Size	Ø25*50mm	Power	3W
Material	6063 aluminum	CCT	3000K/4000K/6000K/Dimmable
Housing color	Black/White/other color	CRI	≥90
IP rate	IP20	Beam angle	15°/24°/36°
Intelligent dimming	YES	LED	OSRAM
Lumen	>80LM/W	Voltage	DC48V



Model	HYDR1205-5W		
Size	Ø40*85mm	Power	5W
Material	6063 aluminum	CCT	3000K/4000K/6000K/Dimmable
Housing color	Black/White/other color	CRI	≥90
IP rate	IP20	Beam angle	15°/24°/36°
Intelligent dimming	YES	LED	OSRAM
Lumen	>80LM/W	Voltage	DC48V






Model	HYDR1205-10W		
Size	Ø45*110mm	Power	10W
Material	6063 aluminum	CCT	3000K/4000K/6000K/Dimmable
Housing color	Black/White/other color	CRI	≥90
IP rate	IP20	Beam angle	15°/24°/36°
Intelligent dimming	YES	LED	OSRAM
Lumen	>80LM/W	Voltage	DC48V




Control system


- ON/OFF
- 0-10V
- Bluetooth
- Dali dimming control
- Zigbee dimming control
- Triac dimming control
- Other dimming control

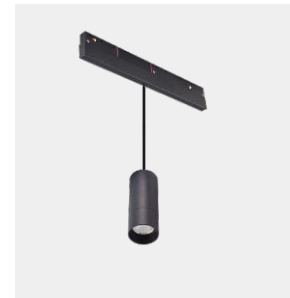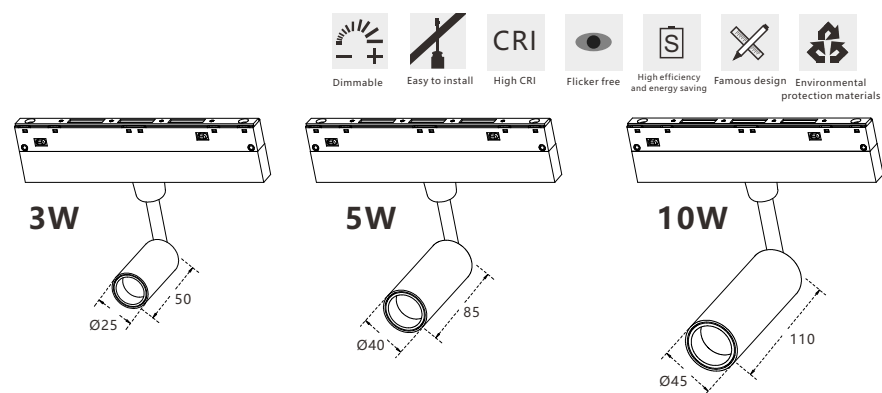


Model	HYDR1206-5W		
Size	Ø45*90mm	Power	5W
Material	6063 aluminum	CCT	3000K/4000K/6000K/Dimmable
Housing color	Black/White/other color	CRI	≥90
IP rate	IP20	Beam angle	15°/24°/36°
Intelligent dimming	YES	LED	OSRAM
Lumen	>80LM/W	Voltage	DC48V



Model	HYDR1206-10W		
Size	Ø40*120mm	Power	10W
Material	6063 aluminum	CCT	3000K/4000K/6000K/Dimmable
Housing color	Black/White/other color	CRI	≥90
IP rate	IP20	Beam angle	15°/24°/36°
Intelligent dimming	YES	LED	OSRAM
Lumen	>80LM/W	Voltage	DC48V





Model	HYDR1206-15W		
Size	Ø45*200mm	Power	15W
Material	6063 aluminum	CCT	3000K/4000K/6000K/Dimmable
Housing color	Black/White/other color	CRI	≥90
IP rate	IP20	Beam angle	15°/24°/36°
Intelligent dimming	YES	LED	OSRAM
Lumen	>80LM/W	Voltage	DC48V




Control system

- ON/OFF

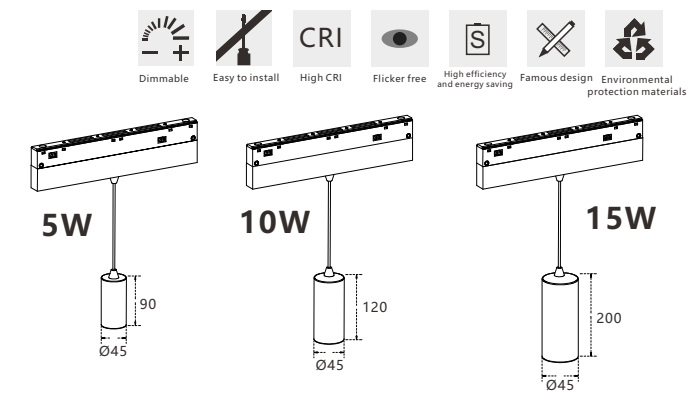





# R35 Classic series

DC48V Magentic rail



hanging/Surface mounted  
HYDR35-901




Recessed  
(before ceiling suspended)  
HYDR35-902



Recessed  
(after ceiling suspended)  
HYDR35-903




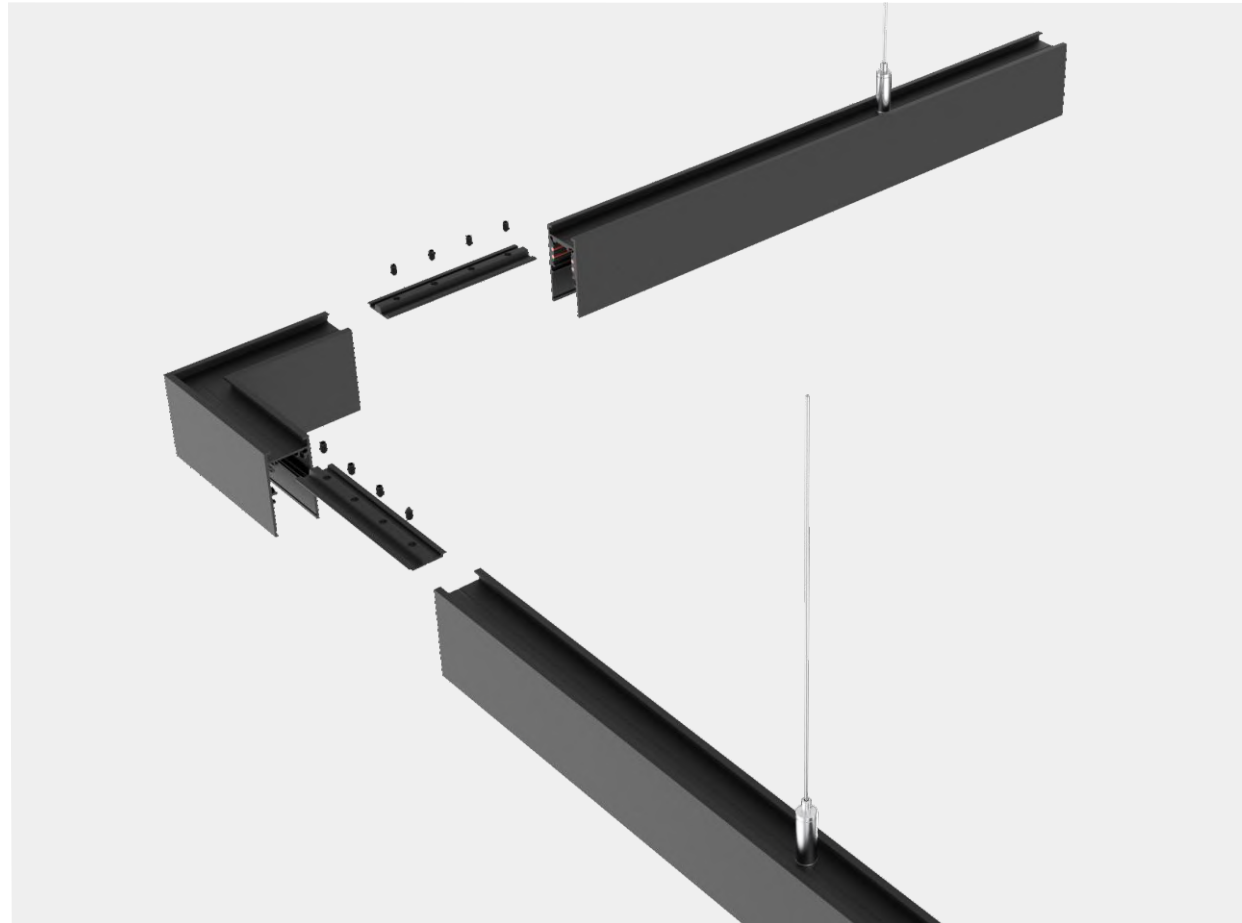

specification

- Extruded aluminum profiles; ●For wall/ceiling surface mounting or suspension mounting
- The height is self-adjusting. ●Black splices are used for continuous lighting systems ,
- 90 degree Angle connectors are used for flexible system design;
- Surface spray color: black/white/custom;
- Flexible installation without tools, magnetic support + locking: ●Protection class IP 20;
- outer power supply or built-in power supply;
- Choose from non-dimming, 0-10V dimming, Bluetooth or Dali dimmable system;

Installation

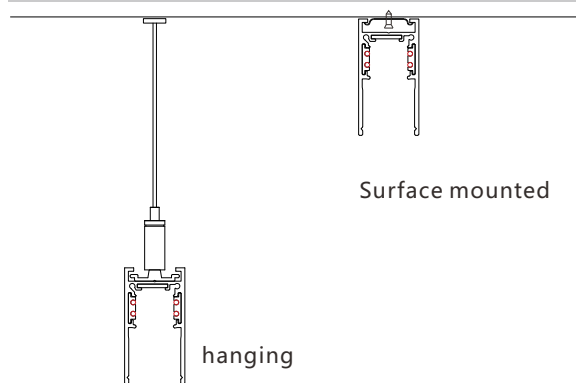

Model: HYDR35-901

Installation: surface mounted  
/hanging


Size: W39\*H68mm

Size: L1000/2000/3000mm

Material: Aluminum

Housing color: Black/White/other

Protection class: IP20

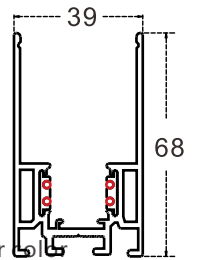

install accessories

picture name drawing Size(MM)

install accessories


Picture	Name	Drawing	Size (MM)
	outer L rail connector		125*125
	inner L rail connector		125*125
	90°T rail connector		200*125
	90°+ rail connector		200*200
	surface mounted end cap		39*68
	recessed rail connect kits		105
	suspended wires		2000
	input adaptor		100*100
	recessed rail adaptor		18*90
	90° L rail adaptor		90
	T rail adaptor		90
	200W outer power supply		115*215
	150W built-in power supply		23*230




specification

- Extruded aluminum profiles;
- For wall/ceiling surface mounting or suspension mounting
- The height is self-adjusting.
- Black splices are used for continuous lighting systems,
- 90 degree Angle connectors are used for flexible system design;
- Surface spray color: black/white/custom;
- Flexible installation without tools, magnetic support + locking;
- Protection class IP 20;
- outer power supply or built-in power supply;
- Choose from non-dimming, 0-10V dimming, Bluetooth or Dali dimmable system;



Installation

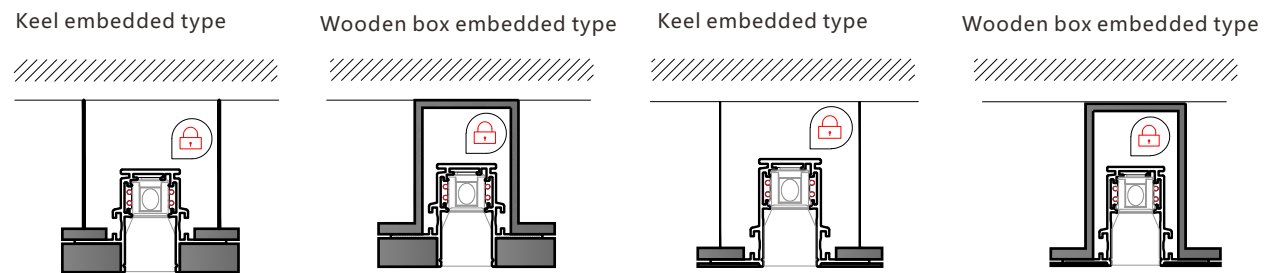


The track and lamps are locked by magnetic suction mechanical buckle



Model: HYDR35-902  
 Installation: recessed Size:  
 W85\*H68mm  
 Cut-out size: 50-55mm Size:  
 L1000/2000/3000mm  
 Material: Aluminum Housing  
 color: Black/White /other  
 color  
 Protection class: IP20

Model: HYDR35-903  
 Installation: recessed Size:  
 W85\*H68mm  
 Cut-out size: 50-55mm Size:  
 L1000/2000/3000mm  
 Material: Aluminum Housing  
 color: Black/White /other  
 color  
 Protection class: IP20



install accessories

Picture	Name	Drawing	Size (MM)	Picture	Name	Drawing	Size (MM)
	outer L rail connector		125*125		inner L rail connector		125*125
	90°T rail connector		200*125		90°+ rail connector		200*200
	surface mounted cap		39*68		recessed rail connect kits		10*50
	recessed rail l adaptor		18*90		input adaptor		90
	T rail adaptor		90		90° L rail adaptor		90
	150W built-in power supply		23*230		200W outer power supply		115*215



**R35** Classic series  
DC48V Magnetic lights



Linear flood light  
HYD-R3501



Dot series  
HYD-R3502



Folding linear flood light  
HYD-R3503



Folding Dot series  
HYD-R3504




Curve track light  
HYDR3505







Model	HYD-R3501-8W		
Size	L138*W35*H57mm	Power	8W
Material	6063 aluminum	CCT	3000K/4000K/6000K/Dimmable
Housing color	Black/White/other color	CRI	≥90
Protection class	IP20	Beam angle	120°
Intelligent dimming	YES	LED	OSRAM
Lumen	>80LM/W	Voltage	DC48V



Model	HYD-R3501-10W		
Size	L271*W35*H57mm	Power	10W
Material	6063 aluminum	CCT	3000K/4000K/6000K/Dimmable
Housing color	Black/White/other color	CRI	≥90
Protection class	IP20	Beam angle	120°
Intelligent dimming	YES	LED	OSRAM
Lumen	>80LM/W	Voltage	DC48V




Model	HYD-R3501-15W		
Size	L403*W35*H57mm	Power	15W
Material	6063 aluminum	CCT	3000K/4000K/6000K/Dimmable
Housing color	Black/White/other color	CRI	≥90
Protection class	IP20	Beam angle	120°
Intelligent dimming	YES	LED	OSRAM
Lumen	>80LM/W	Voltage	DC48V




Model	HYD-R3501-18W		
Size	L535*W35*H57mm	Power	18W
Material	6063 aluminum	CCT	3000K/4000K/6000K/Dimmable
Housing color	Black/White/other color	CRI	≥90
Protection class	IP20	Beam angle	120°
Intelligent dimming	YES	LED	OSRAM
Lumen	>80LM/W	Voltage	DC48V



Model	HYD-R3501-20W		
Size	L800*W35*H57mm	Power	20W
Material	6063 aluminum	CCT	3000K/4000K/6000K/Dimmable
Housing color	Black/White/other color	CRI	≥90
Protection class	IP20	Beam angle	120°
Intelligent dimming	YES	LED	OSRAM
Lumen	>80LM/W	Voltage	DC48V





Model	HYD-R3501-22W		
Size	L1068*W35*H57mm	Power	22W
Material	6063 aluminum	CCT	3000K/4000K/6000K/Dimmable
Housing color	Black/White/other color	CRI	≥90
Protection class	IP20	Beam angle	120°
Intelligent dimming	YES	LED	OSRAM
Lumen	>80LM/W	Voltage	DC48V



Control system



- ON/OFF
- 0-10V
- Bluetooth
- Dali dimming control
- Zigbee dimming control
- Triac dimming control
- Other dimming control

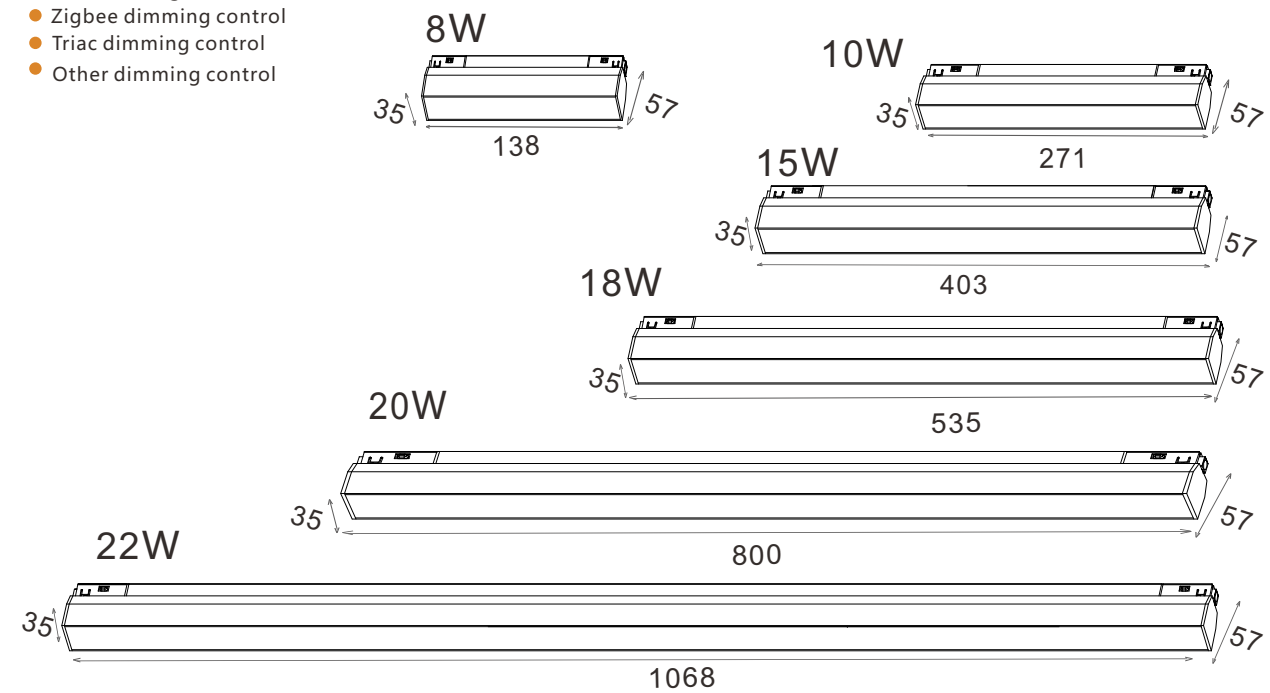




☑ Square ☑ Round  
Multicolor and selection

Model	HYD-R3502-6W		
Size	L138*W35*H57mm	Power	6W
Material	6063 aluminum	CCT	3000K/4000K/6000K/Dimmable
Housing color	Black/White/other color	CRI	≥90
Protection class	IP20	Beam angle	24/38°
Intelligent dimming	YES	LED	OSRAM
Lumen	>80LM/W	Voltage	DC48V




☑ Square ☑ Round  
Multicolor and selection

Model	HYD-R3502-8W		
Size	L271*W35*H57mm	Power	8W
Material	6063 aluminum	CCT	3000K/4000K/6000K/Dimmable
Housing color	Black/White/other color	CRI	≥90
Protection class	IP20	Beam angle	24/38°
Intelligent dimming	YES	LED	OSRAM
Lumen	>80LM/W	Voltage	DC48V



☑ Square ☑ Round  
Multicolor and selection

Model	HYD-R3502-15W		
Size	L403*W35*H57mm	Power	15W
Material	6063 aluminum	CCT	3000K/4000K/6000K/Dimmable
Housing color	Black/White/other color	CRI	≥90
Protection class	IP20	Beam angle	24/38°
Intelligent dimming	YES	LED	OSRAM
Lumen	>80LM/W	Voltage	DC48V




☑ Square ☑ Round  
Multicolor and selection

Model	HYD-R3502-18W		
Size	L535*W35*H57mm	Power	18W
Material	6063 aluminum	CCT	3000K/4000K/6000K/Dimmable
Housing color	Black/White/other color	CRI	≥90
Protection class	IP20	Beam angle	24/38°
Intelligent dimming	YES	LED	OSRAM
Lumen	>80LM/W	Voltage	DC48V




☑ Square ☑ Round  
Multicolor and selection

Model	HYD-R3502-20W		
Size	L800*W35*H57mm	Power	20W
Material	6063 aluminum	CCT	3000K/4000K/6000K/Dimmable
Housing color	Black/White/other color	CRI	≥90
Protection class	IP20	Beam angle	24/38°
Intelligent dimming	YES	LED	OSRAM
Lumen	>80LM/W	Voltage	DC48V



☑ Square ☑ Round  
Multicolor and selection


Model	HYD-R3502-22W		
Size	L1069*W35*H57mm	Power	22W
Material	6063 aluminum	CCT	3000K/4000K/6000K/Dimmable
Housing color	Black/White/other color	CRI	≥90
Protection class	IP20	Beam angle	24/38°
Intelligent dimming	YES	LED	OSRAM
Lumen	>80LM/W	Voltage	DC48V





Control system


- ON/OFF
- 0-10V
- Bluetooth
- Dali dimming control
- Zigbee dimming control
- Triac dimming control
- Other dimming control

two reflectors: ☑ Square ☑ Round





Multicolor and selection

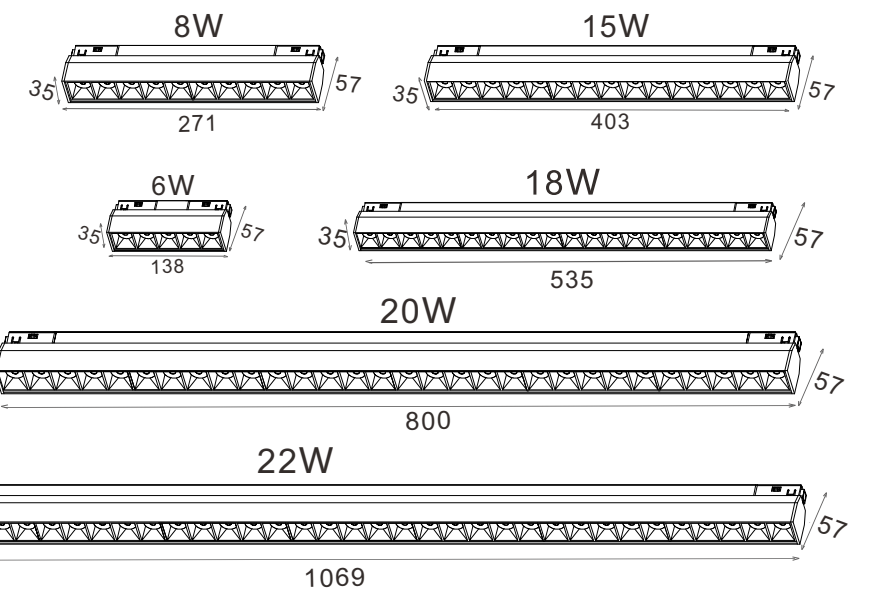






Model	HYD-R3503-8W		
Size	L138*W35*H140mm	Power	8W
Material	6063 aluminum	CCT	3000K/4000K/6000K/Dimmable
Housing color	Black/White/other color	CRI	≥90
Protection class	IP20	Beam angle	120°
Intelligent dimming	YES	LED	OSRAM
Lumen	>80LM/W	Voltage	DC48V

Model	HYD-R3503-16W		
Size	L271*W35*H140mm	Power	16W
Material	6063 aluminum	CCT	3000K/4000K/6000K/Dimmable
Housing color	Black/White/other color	CRI	≥90
Protection class	IP20	Beam angle	120°
Intelligent dimming	YES	LED	OSRAM
Lumen	>80LM/W	Voltage	DC48V







Model	HYD-R3503-24W		
Size	L405*W35*H140mm	Power	24W
Material	6063 aluminum	CCT	3000K/4000K/6000K/Dimmable
Housing color	Black/White/other color	CRI	≥90
Protection class	IP20	Beam angle	120°
Intelligent dimming	YES	LED	OSRAM
Lumen	>80LM/W	Voltage	DC48V





Control system

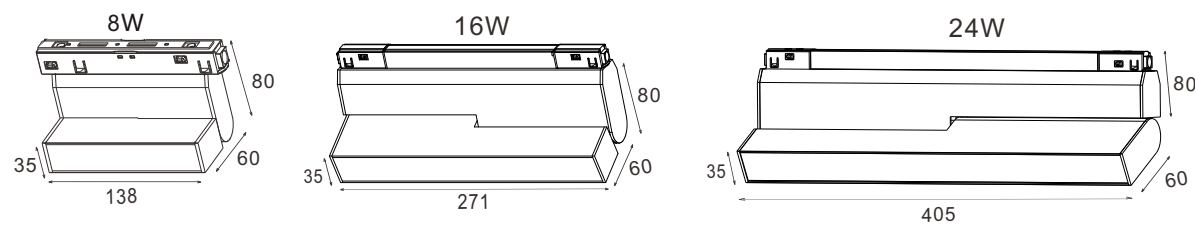- ON/OFF
- 0-10V
- Bluetooth
- Dali dimming control
- Zigbee dimming control
- Triac dimming control
- Other dimming control


Model	HYD-R3504-8W		
Size	L138*W35*H140mm	Power	8W
Material	6063 aluminum	CCT	3000K/4000K/6000K/Dimmable
Housing color	Black/White/other color	CRI	≥90
Protection class	IP20	Beam angle	24/38°
Intelligent dimming	YES	LED	OSRAM
Lumen	>80LM/W	Voltage	DC48V

☑ Square ☑ Round  
Multicolor and selection


Model	HYD-R3504-16W		
Size	L271*W35*H140mm	Power	16W
Material	6063 aluminum	CCT	3000K/4000K/6000K/Dimmable
Housing color	Black/White/other color	CRI	≥90
Protection class	IP20	Beam angle	24/38°
Intelligent dimming	YES	LED	OSRAM
Lumen	>80LM/W	Voltage	DC48V

☑ Square ☑ Round  
Multicolor and selection

Model	HYD-R3504-24W		
Size	L405*W35*H140mm	Power	24W
Material	6063 aluminum	CCT	3000K/4000K/6000K/Dimmable
Housing color	Black/White/other color	CRI	≥90
Protection class	IP20	Beam angle	24/38°
Intelligent dimming	YES	LED	OSRAM
Lumen	>80LM/W	Voltage	DC48V


☑ Square ☑ Round  
Multicolor and selection




Control system

- ON/OFF
- 0-10V
- Bluetooth
- Dali dimming control
- Zigbee dimming control
- Triac dimming control
- Other dimming control

two reflectors: ☑ Square ☑ Round




Multicolor and selection

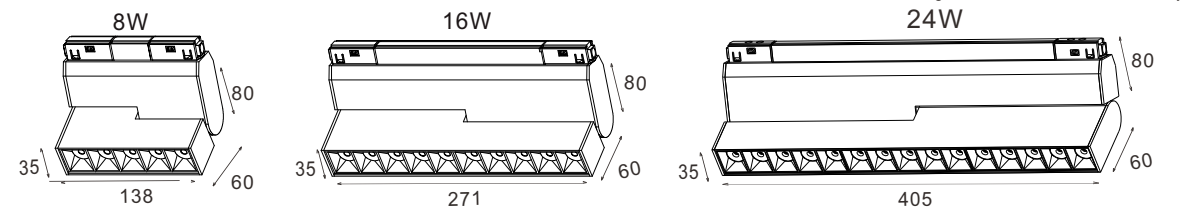





Model	HYDR3505-3W		
Size	Φ25*50mm	Power	3W
Material	6063 aluminum	CCT	3000K/4000K/6000K/Dimmable
Housing color	Black/White/other color	CRI	≥90
Protection class	IP20	Beam angle	15°/24°/36°
Intelligent dimming	YES	LED	OSRAM
Lumen	>80LM/W	Voltage	DC48V




Model	HYDR3505-5W		
Size	Φ40*85mm	Power	5W
Material	6063 aluminum	CCT	3000K/4000K/6000K/Dimmable
Housing color	Black/White/other color	CRI	≥90
Protection class	IP20	Beam angle	15°/24°/36°
Intelligent dimming	YES	LED	OSRAM
Lumen	>80LM/W	Voltage	DC48V




Model	HYDR3505-7W		
Size	Φ45*110mm	Power	7W
Material	6063 aluminum	CCT	3000K/4000K/6000K/Dimmable
Housing color	Black/White/other color	CRI	≥90
Protection class	IP20	Beam angle	15°/24°/36°
Intelligent dimming	YES	LED	OSRAM
Lumen	>80LM/W	Voltage	DC48V




Model	HYDR3505-10W		
Size	Φ55*125mm	Power	10W
Material	6063 aluminum	CCT	3000K/4000K/6000K/Dimmable
Housing color	Black/White/other color	CRI	≥90
Protection class	IP20	Beam angle	15°/24°/36°
Intelligent dimming	YES	LED	OSRAM
Lumen	>80LM/W	Voltage	DC48V



Model	HYDR3505-15W		
Size	Φ65*135mm	Power	15W
Material	6063 aluminum	CCT	3000K/4000K/6000K/Dimmable
Housing color	Black/White/other color	CRI	≥90
Protection class	IP20	Beam angle	15°/24°/36°
Intelligent dimming	YES	LED	OSRAM
Lumen	>80LM/W	Voltage	DC48V





Model	HYDR3505-20W		
Size	Φ75*135mm	Power	20W
Material	6063 aluminum	CCT	3000K/4000K/6000K/Dimmable
Housing color	Black/White/other color	CRI	≥90
Protection class	IP20	Beam angle	15°/24°/36°
Intelligent dimming	YES	LED	OSRAM
Lumen	>80LM/W	Voltage	DC48V



Control system




- ON/OFF
- 0-10V
- Bluetooth
- Dali dimming control
- Zigbee dimming control
- Triac dimming control
- Other dimming control

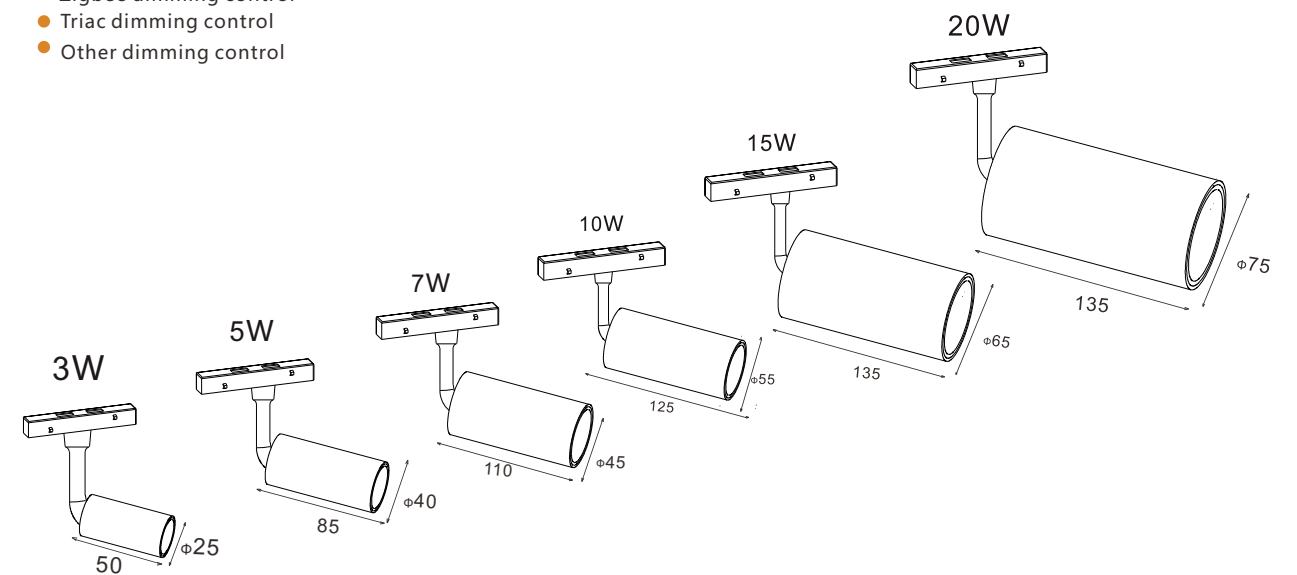




# 10 R35 Elegant series

DC220V Magnetic track rail

-  Hanging/Surface mounted  
HYDR35-102
-  Recessed  
(before ceiling suspended)  
HYDR35-103
-  Recessed  
(after ceiling suspended)  
HYDR35-104




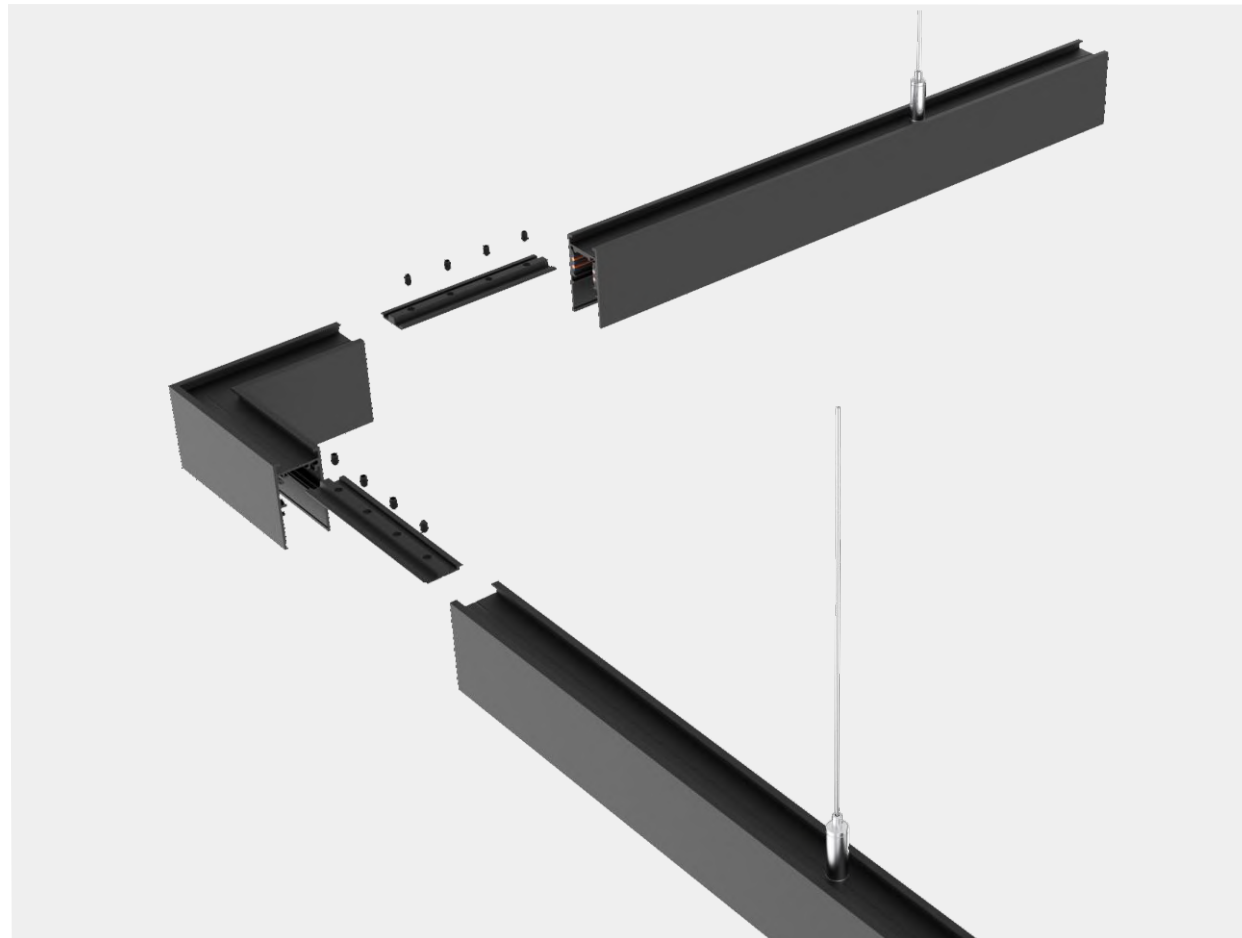


specification

- Extruded aluminum profiles; ●For wall/ceiling surface mounting or suspension mounting
- The height is self-adjusting. ●Black splices are used for continuous lighting systems,
- 90 degree Angle connectors are used for flexible system design;
- Surface spray color: black/white/custom;
- Flexible installation without tools, magnetic support + locking: ●Protection class IP 20;
- outer power supply or built-in power supply;
- Choose from non-dimming, 0-10V dimming, Bluetooth or Dali dimmable system;

Installation

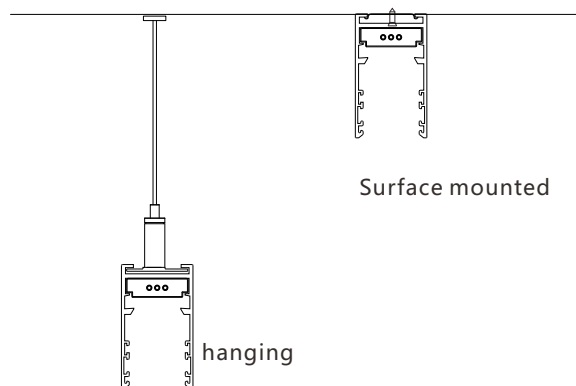

Model: HYDR35-102  
 Installation: surface mounted  
 /hanging  
 Size: W45\*H78mm  
 Size: L100/2000/3000mm  
 Material: Aluminum  
 Housing color: Black/White/other color  
 Protection class: IP20

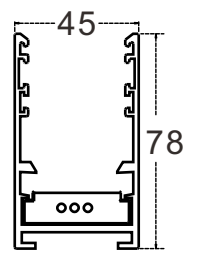

install accessories


Picture	Name	Drawing	Size (MM)	Picture	Name	Drawing	Size (MM)
	outer L rail connector		125*125		inner L rail connector		125*125
	90° T rail connector		200*145		90°+ rail connector		200*200
	surface mounted end cap		45*78		recessed rail connect kits		105
	suspended wires		2000		Electric 4poles L connector between two rail		38*270
	Electric 3poles L connector between two rail		38*270		Electric 4poles connector between two rail		40*38
	Electric 3poles connector between two rail		40*38		Electric 4poles Male plug		40*38
	Electric 3poles female plug		40*38		Electric 4poles female plug		40*38
	Electric 3poles Male plug		40*38		4线母插转换器		38*120



specification

- Extruded aluminum profiles; •For wall/ceiling surface mounting or suspension mounting
- The height is self-adjusting. •Black splices are used for continuous lighting systems,
- 90 degree Angle connectors are used for flexible system design;
- Surface spray color: black/white/custom;
- Flexible installation without tools, magnetic support + locking: •Protection class IP 20;
- outer power supply or built-in power supply;
- Choose from non-dimming, 0-10V dimming, Bluetooth or Dali dimmable system;

Installation

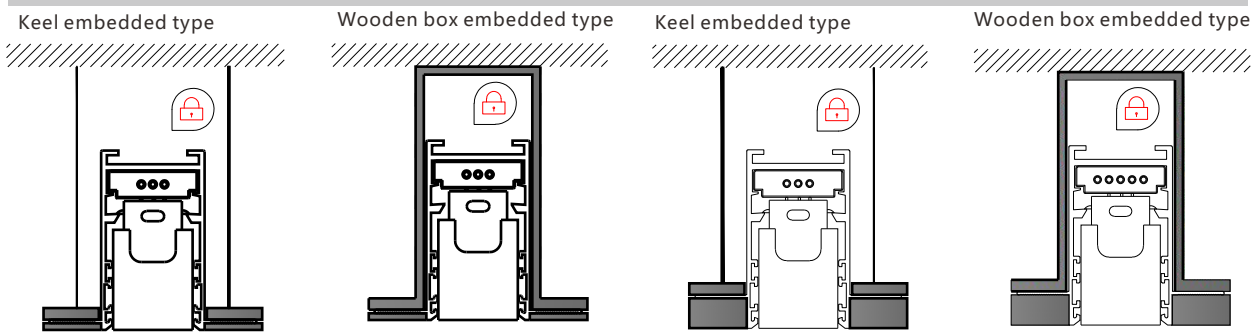

Model: HYDR35-103

Installation: recessed

Size: W90\*H78mm


Cut-out size: 50-55mm

Size: L1000/2000/3000mm

Material: Aluminum

Housing color: Black/White/other color

Protection class: IP20

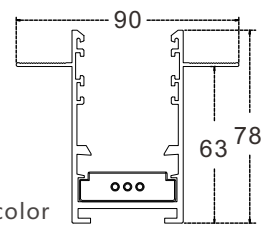

Model: HYDR35-104

Installation: recessed

Size: W90\*H78mm


Cut-out size: 50-55mm

Size: L1000/2000/3000mm

Material: Aluminum


Housing color: Black/White/other color

Protection class: IP20

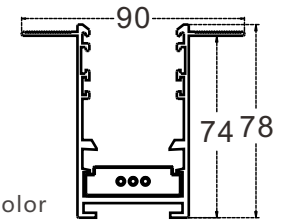

install accessories

Picture	Name	Drawing	Size (MM)	Picture	Name	Drawing	Size (MM)
	outer L rail connector		125*125		inner L rail connector		125*125
	90° T rail connector		200*145		90°+ rail connector		200*200
	surface mounted end cap		45*78		recessed rail connect kits		105
	suspended wires		2000		Electric 4poles L connector between two rail		38*270
	Electric 3poles L connector between two rail		38*270		Electric 4poles connector between two rail		40*38
	Electric 3poles connector between two rail		40*38		Electric 4poles Male plug		40*38
	Electric 3poles female plug		40*38		Electric 4poles female plug		40*38
	Electric 3poles Male plug		40*38		4 poles female adaptor		38*120



**R35** Elegant series  
AC220V Magnetic light



Linear flood light  
HYD-CX07



Dot series  
HYD-CX05



Foldinglinear flood light  
HYD-CX03



FoldingDot series  
HYD-CX05A



Track light  
HYD-CX07F



Track light  
HYD-CX12F




Pendant light  
HYD-CX12F






Model	HYD-CX07-8W		
Size	L165*W35*H65mm	Power	8W
Material	6063 aluminum	CCT	3000K/4000K/6000K/Dimmable
Housing color	Black/White/other color	CRI	≥90
Protection class	IP20	Beam angle	120°
Intelligent dimming	YES	LED	OSRAM
Lumen	>80LM/W	Voltage	DC48V/220V




Model	HYD-CX07-16W		
Size	L325*W35*H65mm	Power	16W
Material	6063 aluminum	CCT	3000K/4000K/6000K/Dimmable
Housing color	Black/White/other color	CRI	≥90
Protection class	IP20	Beam angle	120°
Intelligent dimming	YES	LED	OSRAM
Lumen	>80LM/W	Voltage	DC48V/220V



Model	HYD-CX07-22W		
Size	L645*W35*H65mm	Power	22W
Material	6063 aluminum	CCT	3000K/4000K/6000K/Dimmable
Housing color	Black/White/other color	CRI	≥90
Protection class	IP20	Beam angle	120°
Intelligent dimming	YES	LED	OSRAM
Lumen	>80LM/W	Voltage	DC48V/220V








Model	HYD-CX07-25W		
Size	L965*W35*H65mm	Power	25W
Material	6063 aluminum	CCT	3000K/4000K/6000K/Dimmable
Housing color	Black/White/other color	CRI	≥90
Protection class	IP20	Beam angle	120°
Intelligent dimming	YES	LED	OSRAM
Lumen	>80LM/W	Voltage	DC48V/220V




Control system

● ON/OFF

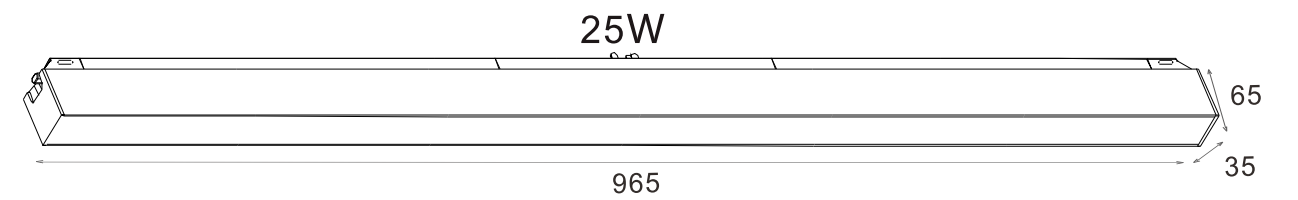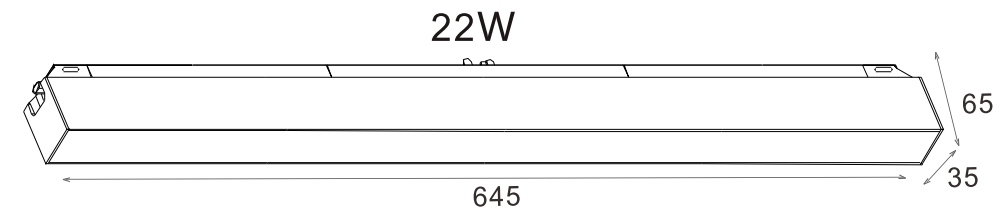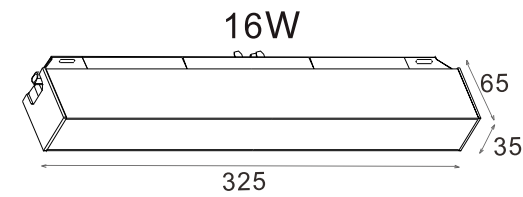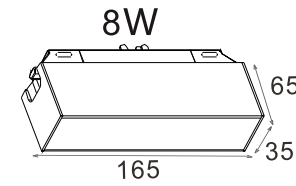





Model	HYD-CX05-8W		
Size	L165*W35*H65mm	Power	8W
Material	6063 aluminum	CCT	3000K/4000K/6000K/Dimmable
Housing color	Black/White/other color	CRI	≥90
Protection class	IP20	Beam angle	30°
Intelligent dimming	YES	LED	OSRAM
Lumen	>80LM/W	Voltage	220V




Model	HYD-CX05-25W		
Size	L965*W35*H65mm	Power	25W
Material	6063 aluminum	CCT	3000K/4000K/6000K/Dimmable
Housing color	Black/White/other color	CRI	≥90
Protection class	IP20	Beam angle	30°
Intelligent dimming	YES	LED	OSRAM
Lumen	>80LM/W	Voltage	220V



Model	HYD-CX05-16W		
Size	L325*W35*H65mm	Power	16W
Material	6063 aluminum	CCT	3000K/4000K/6000K/Dimmable
Housing color	Black/White/other color	CRI	≥90
Protection class	IP20	Beam angle	30°
Intelligent dimming	YES	LED	OSRAM
Lumen	>80LM/W	Voltage	220V





Model	HYD-CX05-22W		
Size	L645*W35*H65mm	Power	22W
Material	6063 aluminum	CCT	3000K/4000K/6000K/Dimmable
Housing color	Black/White/other color	CRI	≥90
Protection class	IP20	Beam angle	30°
Intelligent dimming	YES	LED	OSRAM
Lumen	>80LM/W	Voltage	220V





Control system

- ON/OFF
- Dimmable
- Easy to install
- High CRI
- Flicker free
- High efficiency and energy saving
- Famous design
- Environmental protection materials

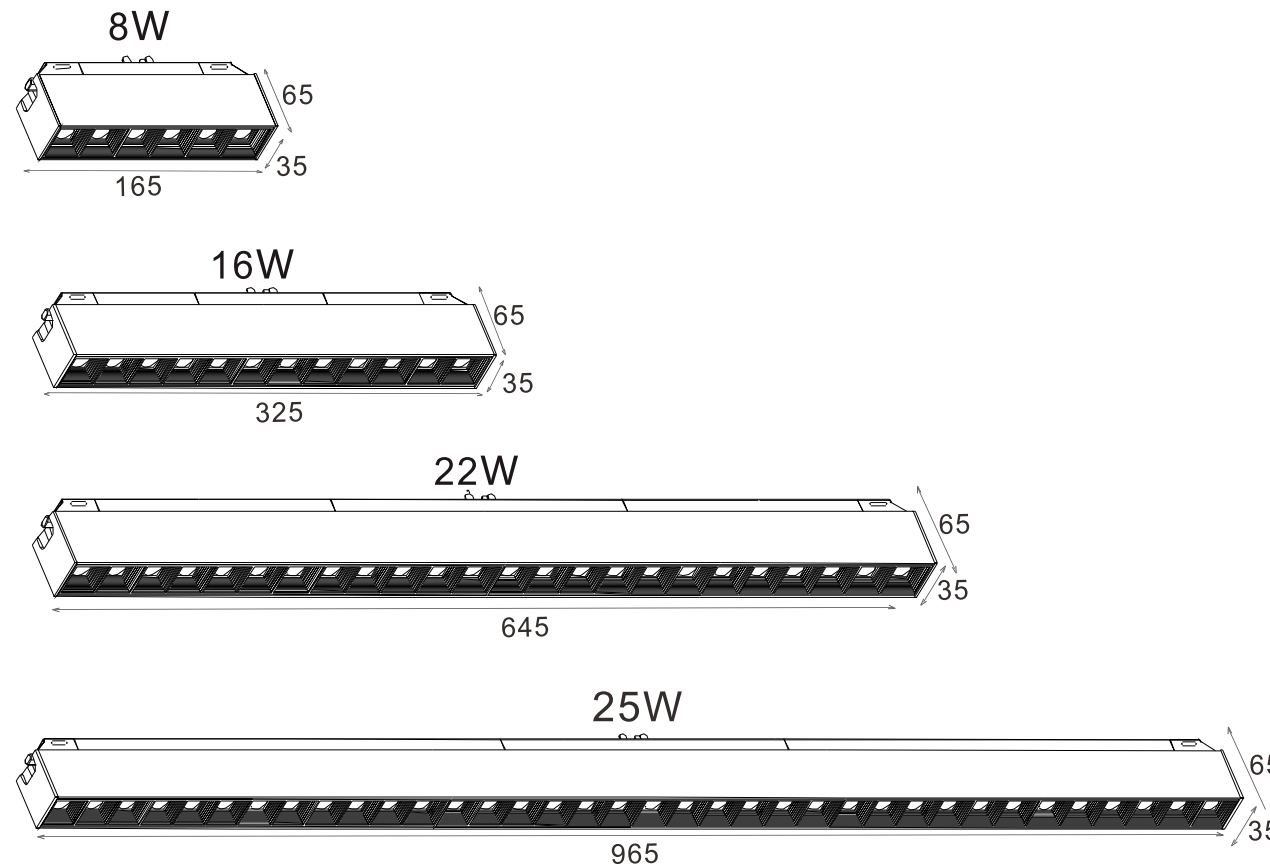






Model	HYD-CX03-8W		
Size	L165*W35*H180mm	Power	8W
Material	6063 aluminum	CCT	3000K/4000K/6000K/Dimmable
Housing color	Black/White/other color	CRI	≥90
Protection class	IP20	Beam angle	120°
Intelligent dimming	YES	LED	OSRAM
Lumen	>80LM/W	Voltage	220V

Model	HYD-CX03-16W		
Size	L325*W35*H180mm	Power	16W
Material	6063 aluminum	CCT	3000K/4000K/6000K/Dimmable
Housing color	Black/White/other color	CRI	≥90
Protection class	IP20	Beam angle	120°
Intelligent dimming	YES	LED	OSRAM
Lumen	>80LM/W	Voltage	220V







Model	HYD-CX03-25W		
Size	L325*W35*H180mm	Power	25W
Material	6063 aluminum	CCT	3000K/4000K/6000K/Dimmable
Housing color	Black/White/other color	CRI	≥90
Protection class	IP20	Beam angle	120°
Intelligent dimming	YES	LED	OSRAM
Lumen	>80LM/W	Voltage	220V





Control system

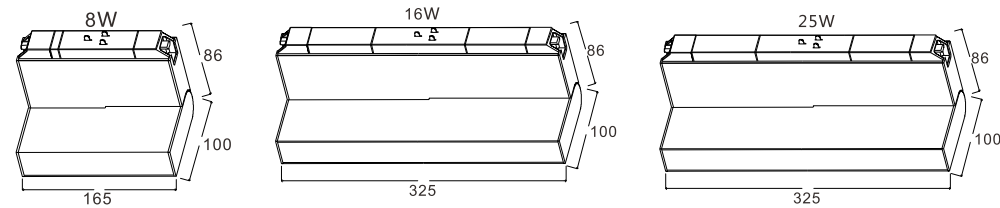

● ON/OFF


Model	HYD-CX05A-8W		
Size	L165*W35*H180mm	Power	8W
Material	6063 aluminum	CCT	3000K/4000K/6000K/Dimmable
Housing color	Black/White/other color	CRI	≥90
Protection class	IP20	Beam angle	30°
Intelligent dimming	YES	LED	OSRAM
Lumen	>80LM/W	Voltage	220V

Model	HYD-CX05A-16W		
Size	L325*W35*H180mm	Power	16W
Material	6063 aluminum	CCT	3000K/4000K/6000K/Dimmable
Housing color	Black/White/other color	CRI	≥90
Protection class	IP20	Beam angle	30°
Intelligent dimming	YES	LED	OSRAM
Lumen	>80LM/W	Voltage	DC48V/220V







Model	HYD-CX05A-25W		
Size	L325*W35*H180mm	Power	25W
Material	6063 aluminum	CCT	3000K/4000K/6000K/Dimmable
Housing color	Black/White/other color	CRI	≥90
Protection class	IP20	Beam angle	30°
Intelligent dimming	YES	LED	OSRAM
Lumen	>80LM/W	Voltage	220V





Control system

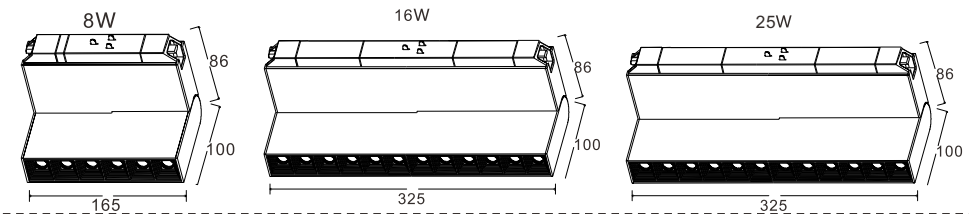● ON/OFF








Model	HYD-CX07F-10W		
Size	Ø50*H100mm	Power	10W
Material	6063 aluminum	CCT	3000K/4000K/6000K/Dimmable
Housing color	Black/White/other color	CRI	≥90
Protection class	IP20	Beam angle	15°/24°/36°
Intelligent dimming	YES	LED	OSRAM
Lumen	>80LM/W	Voltage	220V

Model	HYD-CX07F-20W		
Size	Ø60*H135mm	Power	20W
Material	6063 aluminum	CCT	3000K/4000K/6000K/Dimmable
Housing color	Black/White/other color	CRI	≥90
Protection class	IP20	Beam angle	15°/24°/36°
Intelligent dimming	YES	LED	OSRAM
Lumen	>80LM/W	Voltage	220V







Model	HYD-CX07F-25W		
Size	Ø80*H150mm	Power	25W
Material	6063 aluminum	CCT	3000K/4000K/6000K/Dimmable
Housing color	Black/White/other color	CRI	≥90
Protection class	IP20	Beam angle	15°/24°/36°
Intelligent dimming	YES	LED	OSRAM
Lumen	>80LM/W	Voltage	220V





Control system

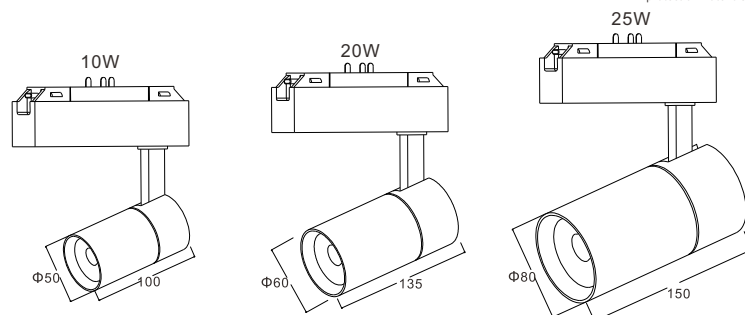
● ON/OFF

Model	HYD-CX12F-20W		
Size	Ø70*H155mm	Power	20W
Material	6063 aluminum	CCT	3000K/4000K/6000K/Dimmable
Housing color	Black/White/other color	CRI	≥90
Protection class	IP20	Beam angle	15°/24°/36°
Intelligent dimming	YES	LED	OSRAM
Lumen	>80LM/W	Voltage	220V






Model	HYD-CX12F-25W		
Size	Ø80*H155mm	Power	25W
Material	6063 aluminum	CCT	3000K/4000K/6000K/Dimmable
Housing color	Black/White/other color	CRI	≥90
Protection class	IP20	Beam angle	15°/24°/36°
Intelligent dimming	YES	LED	OSRAM
Lumen	>80LM/W	Voltage	220V





Control system


● ON/OFF

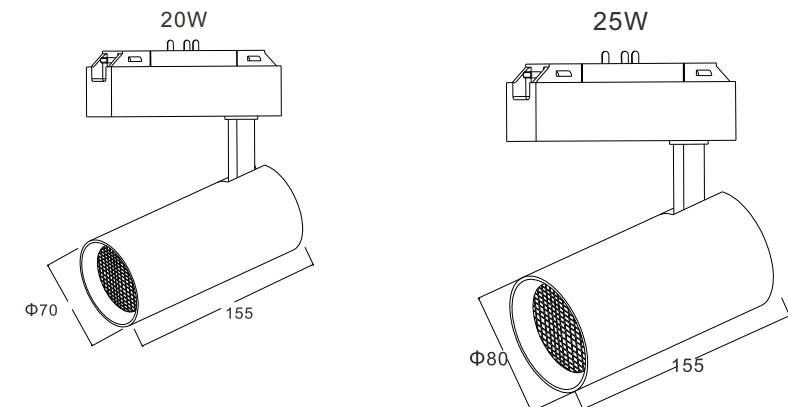






	Model HYD-CX13F-10W		
Size	Ø50*H133mm	Power	10W
Material	6063 aluminum	CCT	3000K/4000K/6000K/Dimmable
Housing color	Black/White/other color	CRI	≥90
Protection class	IP20	Beam angle	15°/30°/45°
Intelligent dimming	YES	LED	OSRAM
Lumen	>80LM/W	Voltage	220V



	Model HYD-CX13F-20W		
Size	Ø65*H155mm	Power	20W
Material	6063 aluminum	CCT	3000K/4000K/6000K/Dimmable
Housing color	Black/White/other color	CRI	≥90
Protection class	IP20	Beam angle	15°/30°/45°
Intelligent dimming	YES	LED	OSRAM
Lumen	>80LM/W	Voltage	220V





	Model HYD-CX13F-25W		
Size	Ø76*H180mm	Power	25W
Material	6063 aluminum	CCT	3000K/4000K/6000K/Dimmable
Housing color	Black/White/other color	CRI	≥90
Protection class	IP20	Beam angle	15°/30°/45°
Intelligent dimming	YES	LED	OSRAM
Lumen	>80LM/W	Voltage	220V



### Control system

● ON/OFF

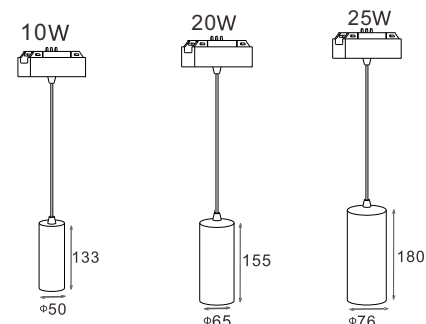




HIGH GRADE CUSTOMIZATION  
Private Custom

NON STANDARD ENGINEERING CUSTOMIZATION

| original design | quality assurance | professional customization |

CREATE AN EXTRAORDINARY LIFE

| Professional customized | Special track rail | Arc track rail |



Easy instal



strong magnetic+latch



Free movement



Safe voltage



Intelligent control

# 12

**W20** round series  
Customized magnetic track



Surface installation  
/pendant round  
magnetic track rail  
**HYD-MR6801**



Recessed round  
magnetic track rail  
**HYD-MR6802**



Pendant round  
magnetic light  
**HYD-QR27**



Round magnetic  
track light  
**HYD-R20-QR**








Any size can be customized

Model	Surface installation/pendant round magnetic track rail				
Size	Ø600*H45mm	Ø800*H45mm	Ø900*H45mm	Ø1000*H45mm	Ø1200*H45mm
	Ø1500*H45mm	Ø1800*H45mm	Ø2000*H45mm	Ø2400*H45mm	Ø3000*H45mm
Material	6063 aluminum Housing color Black/White/other color				

Control system

- ON/OFF
- 0-10V
- Bluetooth
- Dali dimming control
- Zigbee dimming control
- Triac dimming control
- Other dimming control

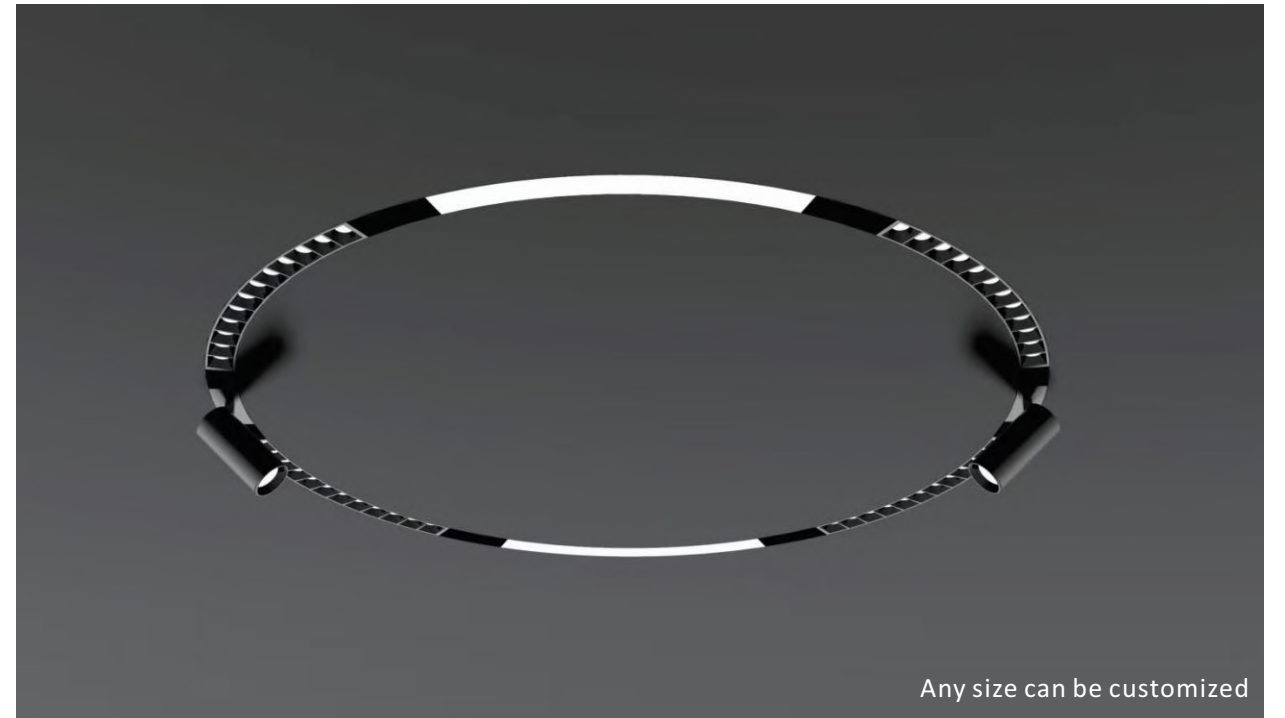



Any size can be customized

Model	Recessed round magnetic track rail				
Size	Ø600*H45mm	Ø800*H45mm	Ø900*H45mm	Ø1000*H45mm	Ø1200*H45mm
	Ø1500*H45mm	Ø1800*H45mm	Ø2000*H45mm	Ø2400*H45mm	Ø3000*H45mm
Material	6063 aluminum Housing color Black/White/other color				

Control system

- ON/OFF
- 0-10V
- Bluetooth
- Dali dimming control
- Zigbee dimming control
- Triac dimming control
- Other dimming control

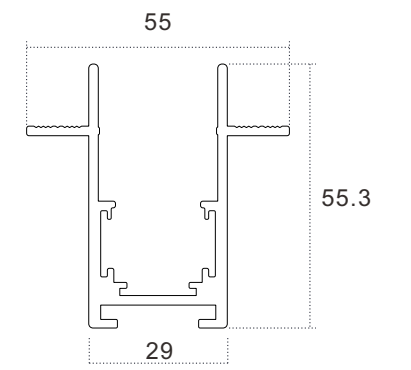

开槽宽: 30-32mm

# 13

**W20** Round magnetic light  
Customized magnetic track



Arc floodlight  
HYD-MR6801A



Arc grille light  
HYD-MR6801G



Arc track light  
HYD-MR6801D




Small King Kong Series  
HYD-R20-1.5W



Small King Kong Series  
HYD-S20-1.5W





Model	HYD-MR6801A Arc floodlight		
Size	Ø600*H45mm	Ø800*H45mm	Ø900*H45mm
	Ø1000*H45mm	Ø1200*H45mm	Ø1500*H45mm
	Ø1800*H45mm	Ø2000*H45mm	Ø2400*H45mm
	Ø3000*H45mm		
Power	6W	CCT	3000K/4000K/6000K/Dimmable
Material	6063 aluminum	显指/流明	≥90/>80LM/W
Housing color	Black/White/other color	Beam angle	120°
Protection class	IP20	LED	OSRAM
Intelligent dimming	YES	Voltage	DC48V




Control system

- ON/OFF
- 0-10V
- Bluetooth
- Dali dimming control
- Zigbee dimming control
- Triac dimming control
- Other dimming control

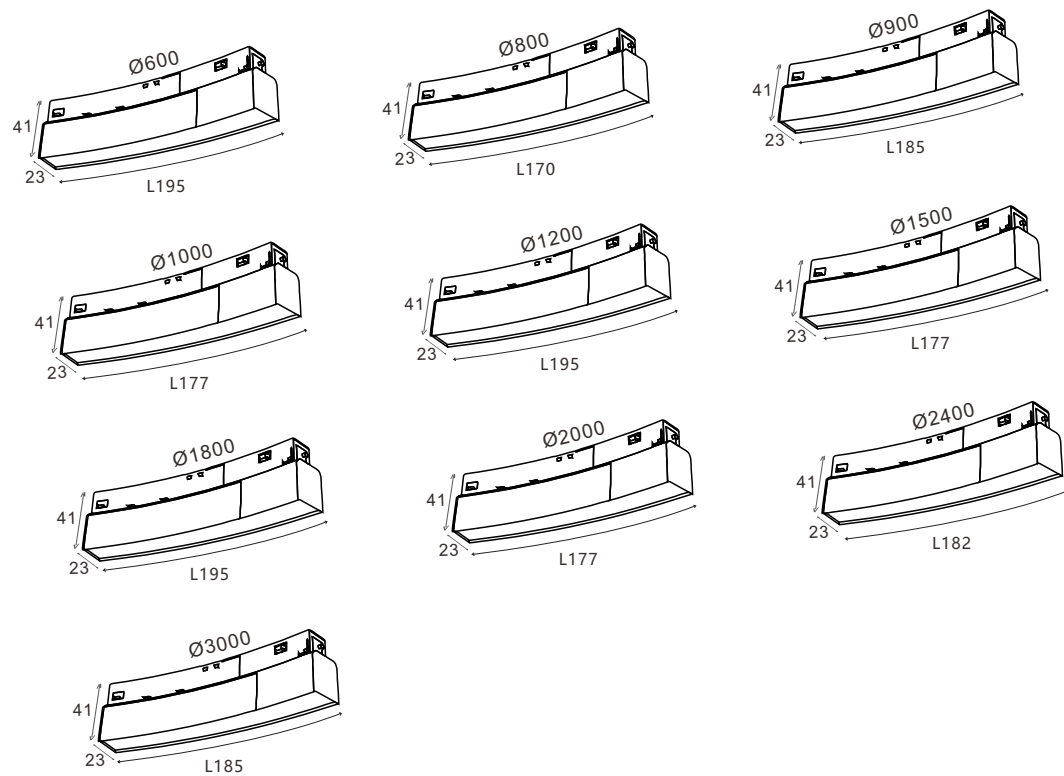



Model	HYD-MR6801G Arc grille light		
Size	Ø600*H45mm	Ø800*H45mm	Ø900*H45mm
	Ø1000*H45mm	Ø1200*H45mm	Ø1500*H45mm
	Ø1800*H45mm	Ø2000*H45mm	Ø2400*H45mm
	Ø3000*H45mm		
Power	6W	CCT	3000K/4000K/6000K/Dimmable
Material	6063 aluminum	显指/流明	≥90/>80LM/W
Housing color	Black/White/other color	Beam angle	15°/30°/45°
Protection class	IP20	LED	OSRAM
Intelligent dimming	YES	Voltage	DC48V




Control system

- ON/OFF
- 0-10V
- Bluetooth
- Dali dimming control
- Zigbee dimming control
- Triac dimming control
- Other dimming control

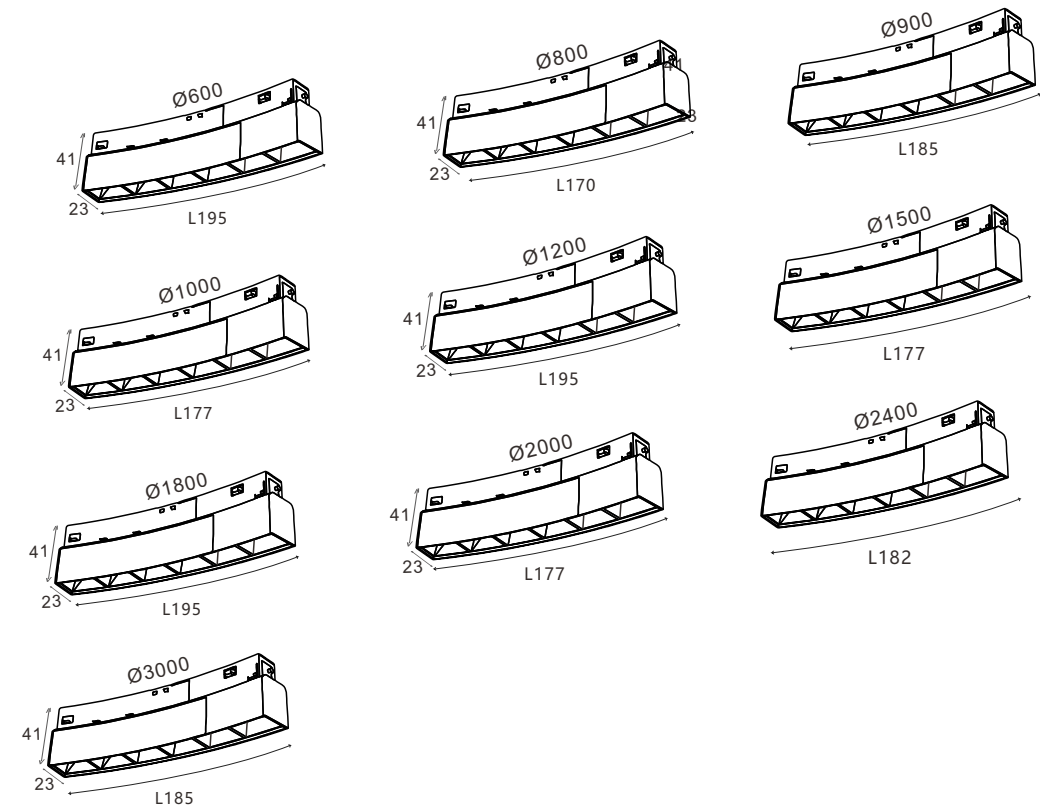





Model	HYD-MR6801D Arc track light		
Size	Ø600*H45mm	Ø800*H45mm	Ø900*H45mm
	Ø1000*H45mm	Ø1200*H45mm	Ø1500*H45mm
	Ø1800*H45mm	Ø2000*H45mm	Ø2400*H45mm
	Ø3000*H45mm		
Power	7W	CCT	3000K/4000K/6000K/Dimmable
Material	6063 aluminum	显指/流明	≥90/>80LM/W
Housing color	Black/White/other color	Beam angle	15°/30°/45°
Protection class	IP20	LED	OSRAM
Intelligent dimming	YES	Voltage	DC48V



Control system

- ON/OFF
- 0-10V
- Bluetooth
- Dali dimming control
- Zigbee dimming control
- Triac dimming control
- Other dimming control

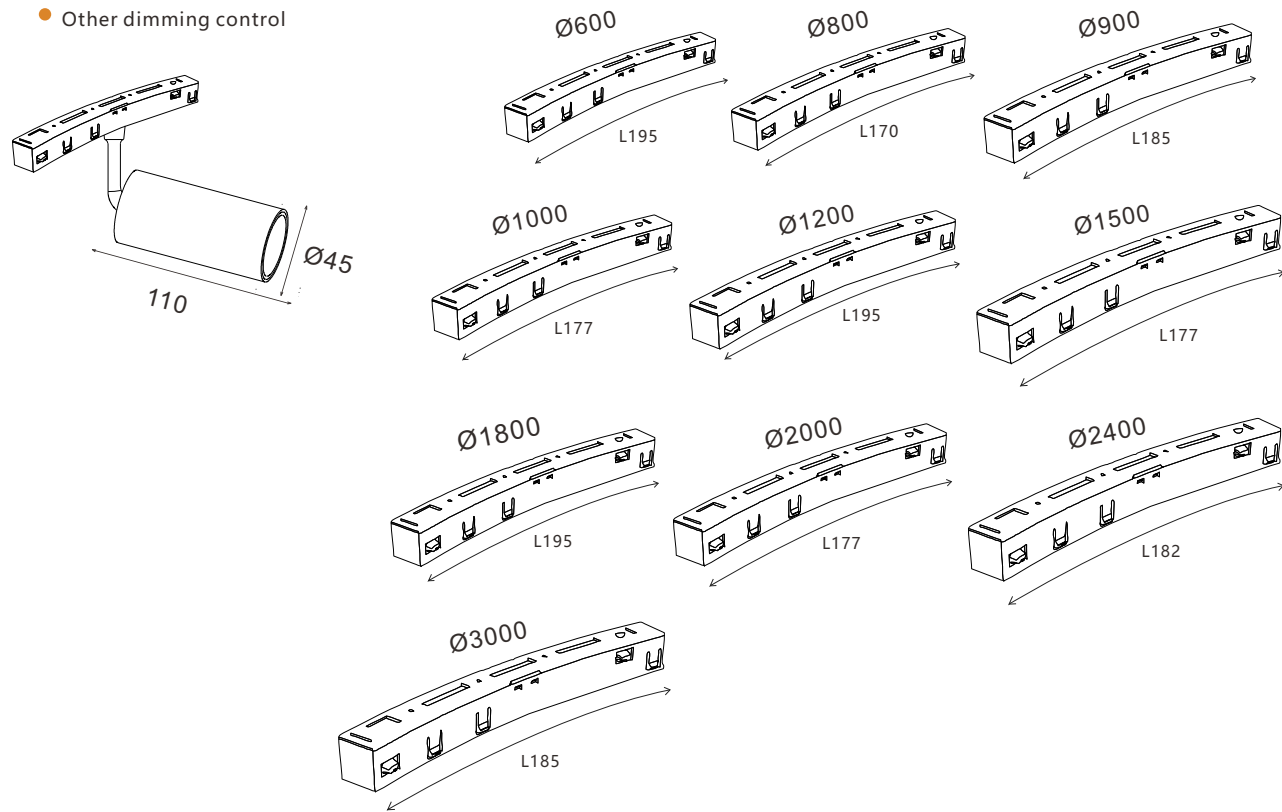


Small King Kong Series

Suitable for R20 any arc track round track or straight track 360° free movement




Suitable for R20 any arc track round track or straight track 360° free movement

Model	HYD-R20-1.5W		
Size	23*30*H48mm	Power	1.5W
Material	6063 aluminum	CCT	3000K/4000K/6000K/Dimmable
Housing color	Black/White/other color	CRI	≥90
Protection class	IP20	Beam angle	24°
Intelligent dimming	YES	LED	OSRAM
Lumen	>80LM/W	Voltage	DC48V





Suitable for R20 any arc track round track or straight track 360° free movement

Model	HYD-S20-1.5W		
Size	23*30*H48mm	Power	1.5W
Material	6063 aluminum	CCT	3000K/4000K/6000K/Dimmable
Housing color	Black/White/other color	CRI	≥90
Protection class	IP20	Beam angle	24°
Intelligent dimming	YES	LED	OSRAM
Lumen	>80LM/W	Voltage	DC48V



Control system

- ON/OFF
- 0-10V
- Bluetooth
- Dali dimming control
- Zigbee dimming control
- Triac dimming control
- Other dimming control

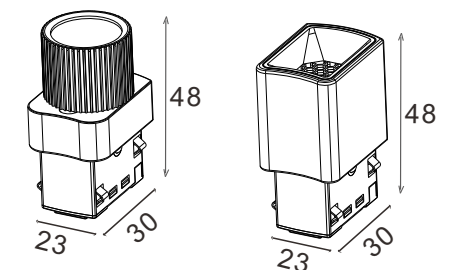





UP AND DOWN LUMINOUS  
MAGNETIC PENDANT LAMP




Model	HYD-QR27			
Size	Ø600	Ø900	Ø1200	Ø1800
Ring Power	15W	20W	25W	30W
Material	6063 aluminum		CCT	3000K/4000K/6000K/Dimmable
Housing color	Silver/customization		CRI	≥90
Protection class	IP20		Beam angle	24°
Intelligent dimming	YES		LED	OSRAM
Lumen	>80LM/W		Voltage	DC48V




Model	HYD-R20-QR-5W			
Size	Ø35*H100mm	Power	5W	
Material	6063 aluminum		CCT	3000K/4000K/6000K/Dimmable
Housing color	Dold+silver		CRI	≥90
Protection class	IP20		Beam angle	15°/24°/36°
Intelligent dimming	YES		LED	OSRAM
Lumen	>80LM/W		Voltage	DC48V



Model	HYD-R20-QR-10W			
Size	Ø45*H110mm	Power	10W	
Material	6063 aluminum		CCT	3000K/4000K/6000K/Dimmable
Housing color	Dold+silver		CRI	≥90
Protection class	IP20		Beam angle	15°/24°/36°
Intelligent dimming	YES		LED	OSRAM
Lumen	>80LM/W		Voltage	DC48V



Size

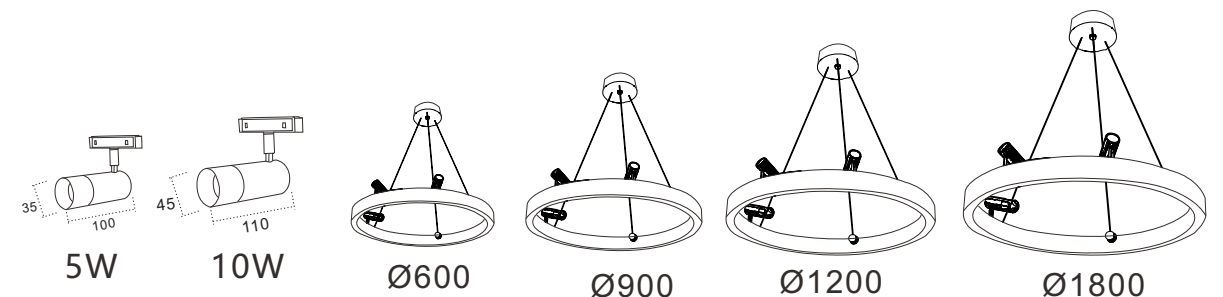



## CONCENTRIC CIRCLE SERIES

ROUND MAGNETIC LIGHT


| easy installation | after-sales worry free | safety voltage |  
complete set installation    single led can be replaced at will if damaged    safety voltage, no electric shock.

# NEW PRODUCT






Model	HYD-YZL07-400-30W		
Size	Ø448*H68mm	Power	16*2W
Material	6063 aluminum	CCT	3000K/4000K/6000K
Housing color	Black+White	CRI	≥90
Protection class	IP20	Beam angle	15°/24°/36°
Intelligent dimming	YES	LED	OSRAM
Lumen	>80LM/W	Voltage	DC24V





Model	HYD-YZL07-600-50W		
Size	Ø648*H68mm	Power	24*2W
Material	6063 aluminum	CCT	3000K/4000K/6000K
Housing color	Black+White	CRI	≥90
Protection class	IP20	Beam angle	15°/24°/36°
Intelligent dimming	YES	LED	OSRAM
Lumen	>80LM/W	Voltage	DC24V



Model	HYD-YZL07-800-65W		
Size	Ø848*H68mm	Power	32*2W
Material	6063 aluminum	CCT	3000K/4000K/6000K
Housing color	Black+White	CRI	≥90
Protection class	IP20	Beam angle	15°/24°/36°
Intelligent dimming	YES	LED	OSRAM
Lumen	>80LM/W	Voltage	DC24V



Model	HYD-YZL07-1000-80W		
Size	Ø1048*H68mm	Power	40*2W
Material	6063 aluminum	CCT	3000K/4000K/6000K
Housing color	Black+White	CRI	≥90
Protection class	IP20	Beam angle	15°/24°/36°
Intelligent dimming	YES	LED	OSRAM
Lumen	>80LM/W	Voltage	DC24V

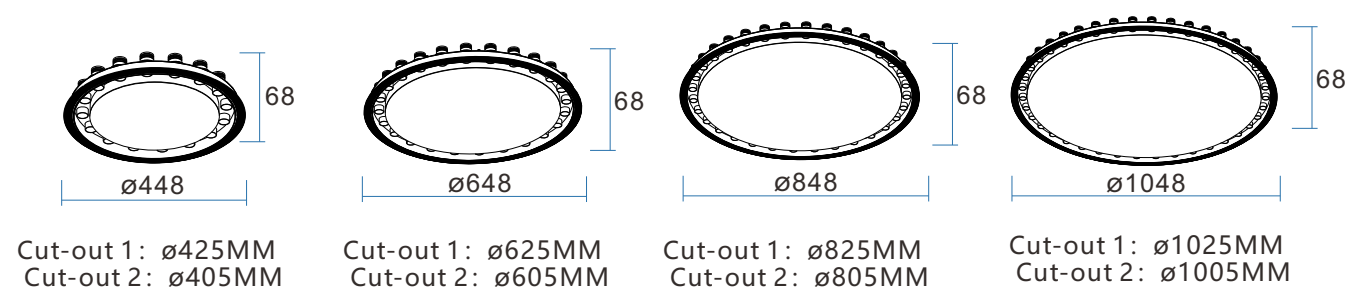

# HIGH GRADE CUSTOMIZATION Private Custom

NON STANDARD ENGINEERING CUSTOMIZATION

| Original design | Quality assurance | Professional customization |





HIGH GRADE CUSTOMIZATION  
Private Custom

NON STANDARD ENGINEERING CUSTOMIZATION

| Original design | Quality assurance | Professional customization |





## CREATE AN EXTRAORDINARY LIFE

| Professional customized | Special track rail | Arc track rail |

## HIGH GRADE CUSTOMIZATION Private Custom

NON STANDARD ENGINEERING CUSTOMIZATION

| Original design | Quality assurance | Professional customization |

