



# HYDGET

上海恒域电力工程有限公司  
SHANGHAI EVER INTERNATIONAL CORPORATION LIM

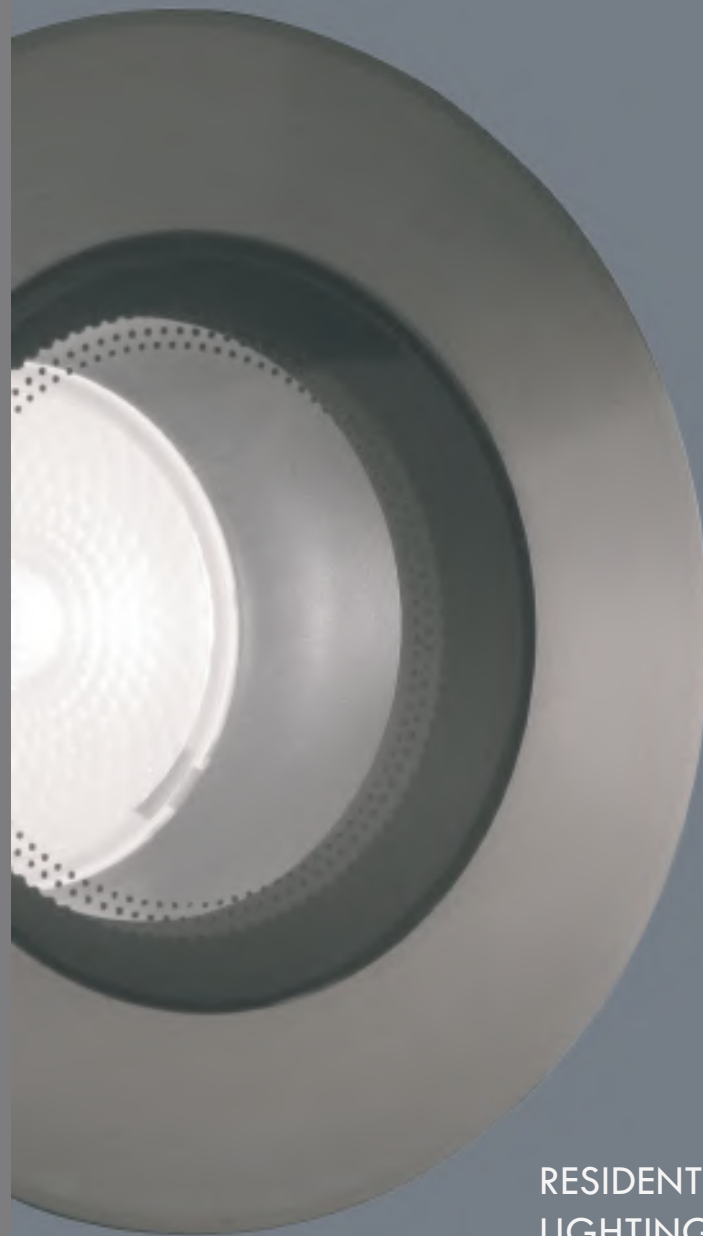

**Shanghai Ever International Corporation Limited**  
Room 402, No. 2, Dongxu Center, Lane 1933, North Zhangyang Road, Pudong  
New Area, Shanghai, China  
Telephone : +86 21 58660061  
Email : [sales@hydgetlighting.com](mailto:sales@hydgetlighting.com)  
<http://www.hydgetlighting.com>

RESIDENTIAL LANDSCAPE  
LIGHTING CATALOG

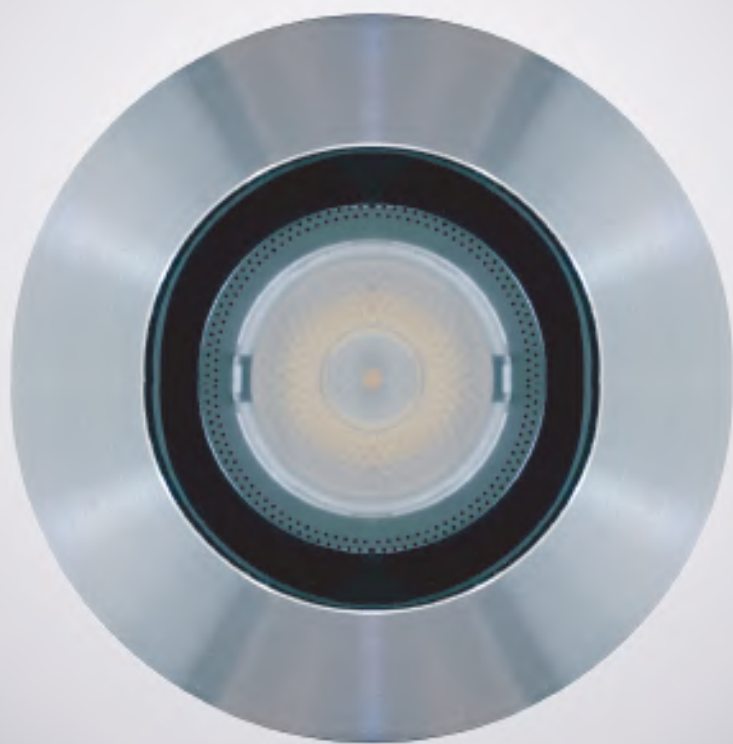

LIGHTING ARTISAN

Recessed light 埋地灯

I

Spot light 投射灯

II

Step light 阶梯灯

III

Path light 庭院灯

IV

Underwater light 水下灯

V

Wall light 壁灯

VI


Down light 筒灯

VII

Accessory 配件

VIII

Recessed light

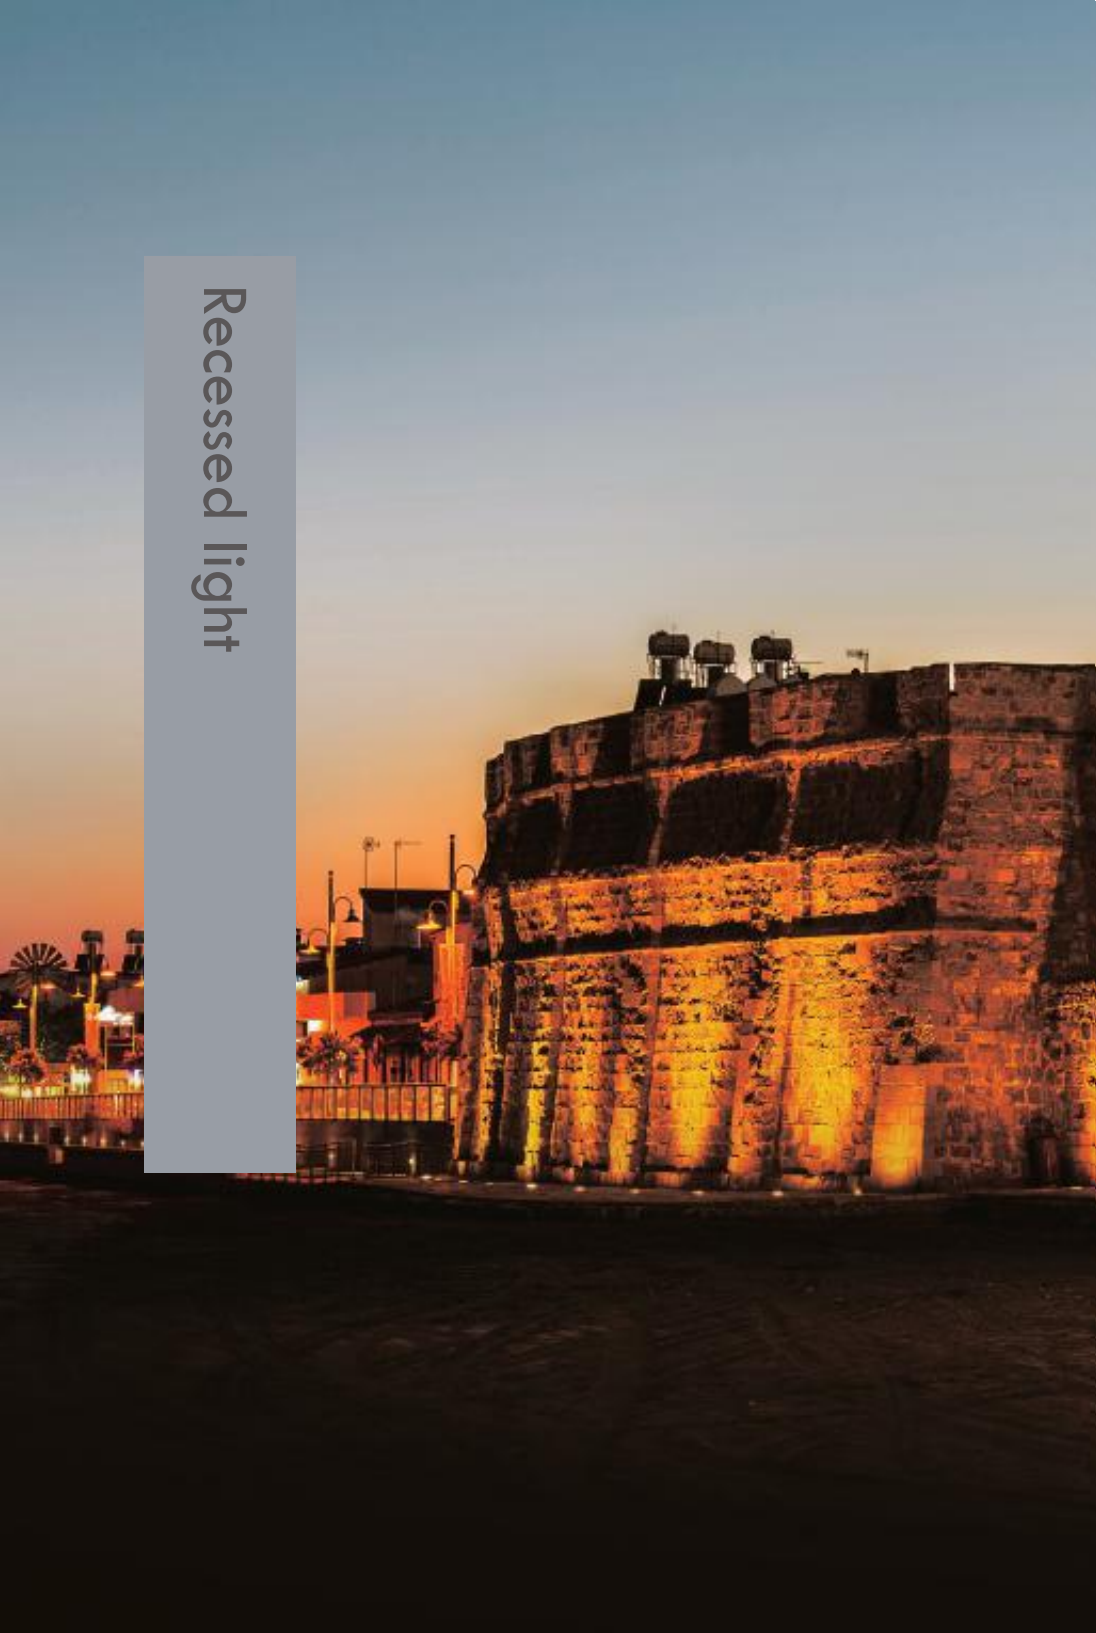


RECESSED  
LIGHT


埋地灯




## RECESSED LIGHT 埋地灯



DEXWUL0111A



DEXWUL0111B



DEXWUL0111C

Unit: mm

Item number 产品型号	Watts 功率	Input Current 输入电流	CCT 色温	LED Lumens 光通量	Beam Angle 光束角	Cut out 开孔尺寸	Recess 安装深度
DEXWUL0111A	1W	350mA	3000K	120lm	25°	D30	35
DEXWUL0111B	1W	350mA	3000K	120lm	25°	D30	35
DEXWUL0111C	1W	350mA	3000K	120lm	25°	D30	35

## Features 产品特点

### Stainless Steel Walkover Up Light

For outdoor inground/recessed/path/decking/bathtub

LED: 1W

Reduced Glare: Sunken light source

Beam Angle: 25° / 40° / 60°

Color Temperature: 2700K / 3000K / 4000K

Finish: Satin 316 Stainless Steel

IP rated: IP67

Cut out: D30 (for deck mounting)

Input Current: 350mA, 3-4V DC with 2M of power cable

Dimmable support: DALI / DMX / 1-10V / Triac / PWM

3 year limited guarantee

### 不锈钢埋地灯

适用于户外：走道、庭院、花园区域

LED: 1W

光束角：25° / 40° / 60°

色温：2700K / 3000K / 4000K

颜色：不锈钢316

防护等级：IP67


开孔尺寸：D30 (嵌入安装)

输入电流：350mA, 3-4V DC; 自带配线长度2米

调光方式：DALI / DMX / 1-10V / 可控硅 / PWM

3年有限整灯品质保证

## Optical Specification 配光曲线

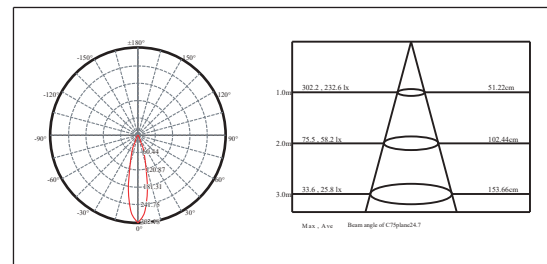


## Optical Accessories 可选配件

### Mounting sleeve 预埋件



WUAS04  
Cut out size: D33mm  
开孔尺寸: D33mm



### IP68 cable connector 防水接线器



WCC001  
suitable for 22-12AWG cable  
适用于22-12AWG电线

### Optional finish 可选颜色



MB  
Matt Black  
氧化雾黑



MS  
Matt Silver  
氧化雾银

RECESSED LIGHT 埋地灯



Unit: mm

Item number 产品型号	Watts 功率	Input Volt 输入电压	CCT 色温	LED Lumens 光通量	Beam Angle 光束角	Cut out 开孔尺寸	Recess 安装深度
DEXWUL0112A	1W	12/24V	3000K	120lm	25°	D30	60
DEXWUL0112B	1W	12/24V	3000K	120lm	25°	D30	60
DEXWUL0112C	1W	12/24V	3000K	120lm	25°	D30	60

Features 产品特点

**Stainless Steel Walkover Up Light**  
For outdoor inground/recessed/path/decking/bathtub

LED: 1W  
Reduced Glare: Sunken light source  
Beam Angle: 25° / 40° / 60°  
Color Temperature: 2700K / 3000K / 4000K  
Finish: Satin 316 Stainless Steel  
IP rated: IP67  
Cut out: D30 (for deck mounting)

12/24VDC input, built-in DC driver with 2M of power cable

3 year limited guarantee


**不锈钢埋地灯**  
适用于户外：走道、庭院、花园区域

LED: 1W  
光束角：25° / 40° / 60°  
色温：2700K / 3000K / 4000K  
颜色：不锈钢316  
防护等级：IP67  
开孔尺寸：D30 (嵌入安装)

输入电压：12 / 24VDC；内置DC-DC驱动，自带配线长度2米

3年有限整灯品质保证

Optical Specification 配光曲线

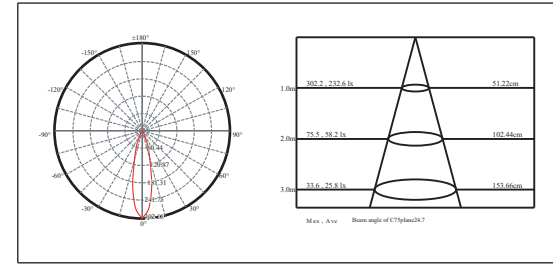


Optical Accessories 可选配件

Mounting sleeve 预埋件



WUAS05  
Cut out size: D33mm  
开孔尺寸：D33mm



Unit: mm

IP68 junction box 防水接线盒



JB2001  
For single fixture installation  
单灯安装



JB3001  
For continuous fixtures installation  
连续安装

Optional finish 可选颜色




MB  
Matt Black  
氧化雾黑




MS  
Matt Silver  
氧化雾银


## RECESSED LIGHT 埋地灯



DEXWUL0113A



DEXWUL0113B



DEXWUL0113C

Unit: mm

Item number 产品型号	Watts 功率	Input Volt 输入电压	CCT 色温	LED Lumens 光通量	Cut out 开孔尺寸	Recess 安装深度
DEXWUL0113A	0.5W	24VDC	3000K	75lm	D30	35
DEXWUL0113B	0.5W	24VDC	3000K	75lm	D30	35
DEXWUL0113C	0.5W	24VDC	3000K	75lm	D30	35

## Features 产品特点

**Stainless Steel Walkover Up Light**  
For outdoor inground/recessed/path/decking/bathtub

LED: 1W  
Reduced Glare: Sunken light source  
Color Temperature: 2700K / 3000K / 4000K  
Finish: Satin 316 Stainless Steel  
IP rated: IP67  
Cut out: D30 (for deck mounting)

24VDC input, built-in DC driver with 2M of power cable

3 year limited guarantee


**不锈钢埋地灯**  
适用于户外：走道、庭院、花园区域

LED: 1W  
色温：2200K / 2700K / 3000K  
颜色：不锈钢316  
防护等级：IP67  
开孔尺寸：D30 (嵌入安装)

输入电压：24VDC；内置DC-DC驱动·自带配线长度2米

3年有限整灯品质保证

## Optical Specification 配光曲线

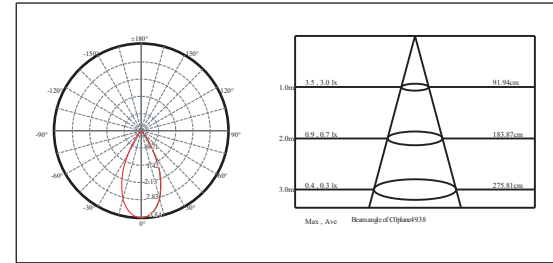


## Optical Accessories 可选配件

### Mounting sleeve 预埋件



WUAS04  
Cut out size: D33mm  
开孔尺寸：D33mm



Unit: mm

### IP68 cable connector 防水接线器



WCC001  
suitable for 22-12AWG cable  
适用于22-12AWG电线

### Optional finish 可选颜色




MB  
Matt Black  
氧化雾黑




MS  
Matt Silver  
氧化雾银


## RECESSED LIGHT 埋地灯



DEXWUL0311A



DEXWUL0311B



DEXWUL0311C

Unit: mm

Item number 产品型号	Watts 功率	Input Current 输入电流	CCT 色温	LED Lumens 光通量	Beam Angle 光束角	Cut out 开孔尺寸	Recess 安装深度
DEXWUL0311A	3W	700mA	3000K	250lm	21°	D40	55
DEXWUL0311B	3W	700mA	3000K	250lm	21°	D40	55
DEXWUL0311C	3W	700mA	3000K	250lm	21°	D40	55

## Features 产品特点

### Stainless Steel Walkover Up Light

For outdoor inground/recessed/path/decking/bathtub

LED: 3W

Reduced Glare: Sunken light source

Beam Angle: 10° / 15° / 21° / 36° / 60°

Color Temperature: 2700K / 3000K / 4000K

Finish: Satin 316 Stainless Steel

IP rated: IP67

Cut out: D40 (for deck mounting)

Input Current: 350mA/500mA/700mA, 3-4V DC with 2M of power cable

Dimmable support: DALI / DMX / 1-10V / Triac / PWM

3 year limited guarantee

### 不锈钢埋地灯

适用于户外：走道、庭院、花园区域

LED: 3W

光束角：10° / 15° / 21° / 36° / 60°

色温：2700K / 3000K / 4000K

颜色：不锈钢316

防护等级：IP67


开孔尺寸：D40 (嵌入安装)

输入电流：350mA/500mA/700mA, 3-4V DC; 自带配线长度2米

调光方式：DALI / DMX / 1-10V / 可控硅 / PWM

3年有限整灯品质保证

## Optical Specification 配光曲线

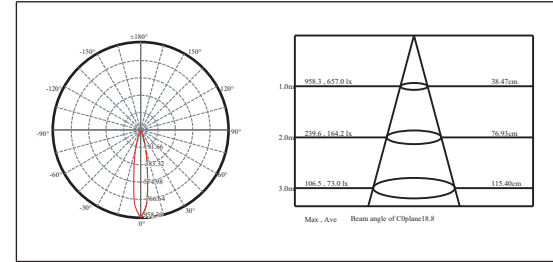


## Optical Accessories 可选配件

### Mounting sleeve 预埋件



STAS01  
Cut out size: D41mm  
开孔尺寸: D41mm



Unit: mm

### IP68 junction box 防水接线盒



JB1001  
For single fixture installation  
单灯安装



WCC001  
For continuous fixtures installation  
连续安装

### Optional finish 可选颜色



MB  
Matt Black  
氧化雾黑



MS  
Matt Silver  
氧化雾银

## RECESSED LIGHT 埋地灯



Unit: mm

Item number 产品型号	Watts 功率	Input Volt 输入电压	CCT 色温	LED Lumens 光通量	Beam Angle 光束角	Cut out 开孔尺寸	Recess 安装深度
DEXWUL0312A	2W	12/24V	3000K	200lm	21°	D40	65
DEXWUL0312B	2W	12/24V	3000K	200lm	21°	D40	65
DEXWUL0312C	2W	12/24V	3000K	200lm	21°	D40	65

## Features 产品特点

**Stainless Steel Walkover Up Light**  
For outdoor inground / recessed / path / decking

LED: 2W  
Reduced Glare: Sunken light source  
Beam Angle: 10° / 15° / 21° / 36° / 60°  
Color Temperature: 2700K / 3000K / 4000K  
Finish: Satin 316 Stainless Steel  
IP rated: IP67  
Cut out: D40 (for deck mounting)

12/24VDC input, built-in DC driver with 2M of power cable

3 year limited guarantee


**不锈钢埋地灯**  
适用于户外：走道、庭院、花园区域

LED: 2W  
光束角：10° / 15° / 21° / 36° / 60°  
色温：2700K / 3000K / 4000K  
颜色：不锈钢316  
防护等级：IP67  
开孔尺寸：D40 (嵌入安装)

输入电压：12 / 24VDC；内置DC-DC驱动·自带配线长度2米

3年有限整灯品质保证

## Optical Specification 配光曲线

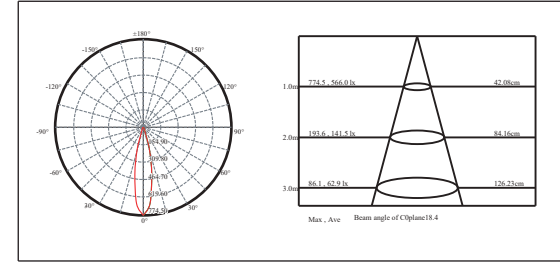


## Optical Accessories 可选配件

### Mounting sleeve 预埋件



STAS01  
Cut out size: D41mm  
开孔尺寸: D41mm



Unit: mm

### IP68 junction box 防水接线盒



JB2001  
For single fixture installation  
单灯安装



JB3001  
For continuous fixtures installation  
连续安装

### Optional finish 可选颜色




MB  
Matt Black  
氧化雾黑




MS  
Matt Silver  
氧化雾银




## RECESSED LIGHT 埋地灯



DEXWUL0412A



DEXWUL0412B



DEXWUL0412C

Unit: mm

Item number 产品型号	Watts 功率	Input Volt 输入电压	CCT 色温	LED Lumens 光通量	Beam Angle 光束角	Cut out 开孔尺寸	Recess 安装深度
DEXWUL0412A	4W	12/24V	3000K	350lm	10°	D52	100
DEXWUL0412B	4W	12/24V	3000K	350lm	10°	D52	100
DEXWUL0412C	4W	12/24V	3000K	350lm	10°	D52	100

## Features 产品特点

**Stainless Steel Walkover Up Light**  
For outdoor inground / recessed / path / decking

LED: 4W  
Reduced Glare: Sunken light source  
Beam Angle: 3° / 6° / 10° / 20° / 40°  
Color Temperature: 2700K / 3000K / 4000K  
Finish: Satin 316 Stainless Steel  
IP rated: IP67  
Cut out: D52 (for deck mounting)

12/24VDC input, built-in DC driver with 2M of power cable

3 year limited guarantee


**不锈钢制埋地灯**  
适用于户外：走道、庭院、花园区域

LED: 4W  
光束角：3° / 6° / 10° / 20° / 40°  
色温：2700K / 3000K / 4000K  
颜色：不锈钢316  
防护等级：IP67  
开孔尺寸：D52 (嵌入安装)

输入电压：12 / 24VDC；内置DC-DC驱动，自带配线长度2米

3年有限整灯品质保证

## Optical Specification 配光曲线

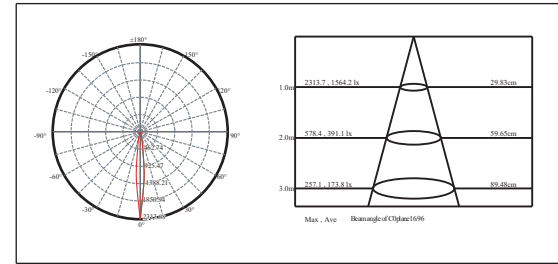


## Optical Accessories 可选配件

### Mounting sleeve 预埋件



WUAS01  
Cut out size: D60mm  
开孔尺寸：D60mm



Unit: mm

### IP68 junction box 防水接线盒



JB2001  
For single fixture installation  
单灯安装



JB3001  
For continuous fixtures installation  
连续安装

### Optional finish 可选颜色




MB  
Matt Black  
氧化雾黑



MS  
Matt Silver  
氧化雾银

## RECESSED LIGHT 埋地灯

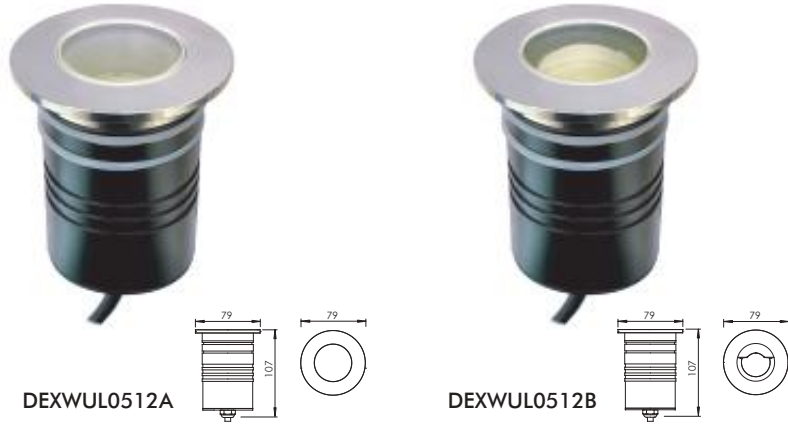

DEXWUL0512A

DEXWUL0512B

Unit: mm

Item number 产品型号	Watts 功率	Input Volt 输入电压	CCT 色温	LED Lumens 光通量	Beam Angle 光束角	Cut out 开孔尺寸	Recess 安装深度
DEXWUL0512A	5W	24V	3000K	550lm	36°	D65	120
DEXWUL0512B	5W	24V	3000K	550lm	Asymmetric 偏光	D65	120

## Features 产品特点

### Stainless Steel Walkover Up Light

For outdoor inground / recessed / path / decking

LED: 5W  
Reduced Glare: Sunken light source  
Beam Angle: WUL0512A (15° / 24° / 36°)  
Color Temperature: 2700K / 3000K / 4000K  
Finish: Satin 316 Stainless Steel  
IP rated: IP67  
Cut out: D65 (for deck mounting)

24VDC input, built-in DC driver with 2M of power cable

3 year limited guarantee

### 不锈钢埋地灯


适用于户外：走道、庭院、花园区域

LED: 5W  
光束角：WUL0512A(15° / 24° / 36°)  
色温：2700K / 3000K / 4000K  
颜色：不锈钢316  
防护等级：IP67  
开孔尺寸：D65 (嵌入安装)

输入电压：24V DC；内置DC-DC驱动·自带配线长度2米

3年有限整灯品质保证

## Optical Specification 配光曲线

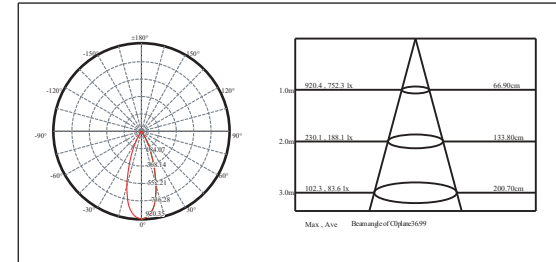


## Optical Accessories 可选配件

### Mounting sleeve 预埋件



WUAS02  
Cut out size: D71mm  
开孔尺寸：D71mm



Unit: mm

### IP68 junction box 防水接线盒



JB2001  
For single fixture installation  
单灯安装



JB3001  
For continuous fixtures installation  
连续安装

## Optional finish 可选颜色




MB  
Matt Black  
氧化雾黑




MS  
Matt Silver  
氧化雾银


## RECESSED LIGHT 埋地灯



DEXWUL0711A



DEXWUL0711B



DEXWUL0711C

Unit: mm

Item number 产品型号	Watts 功率	Input Current 输入电流	CCT 色温	LED Lumens 光通量	Beam Angle 光束角	Cut out 开孔尺寸	Recess 安装深度
DEXWUL0711A	7W	350mA	3000K	750lm	38°	D65	85
DEXWUL0711B	7W	350mA	3000K	750lm	38°	D65	85
DEXWUL0711C	7W	350mA	3000K	750lm	38°	D65	85

## Features 产品特点

**Stainless Steel Walkover Up Light**  
For outdoor inground / recessed / path / decking

LED: 7W  
Reduced Glare: Sunken light source  
Beam Angle: 15° / 25° / 38° / 60°  
Color Temperature: 2700K / 3000K / 4000K  
Finish: Satin 316 Stainless Steel  
IP rated: IP67  
Cut out: D65 (for deck mounting)

Input Current: 350mA, 18V DC with 2M of power cable  
Dimmable support: DALI / DMX / 1-10V / Triac / PWM

3 year limited guarantee

**不锈钢埋地灯**  
适用于户外：走道、庭院、花园区域


LED: 7W  
光束角：15° / 25° / 38° / 60°  
色温：2700K / 3000K / 4000K  
颜色：不锈钢316  
防护等级：IP67  
开孔尺寸：D65 (嵌入安装)

输入电流：350mA, 18V DC; 自带配线长度2米  
调光方式：DALI / DMX / 1-10V / 可控硅 / PWM

3年有限整灯品质保证

Patent 专利 #: ZL 2015 2 0276208.6

## Optical Specification 配光曲线

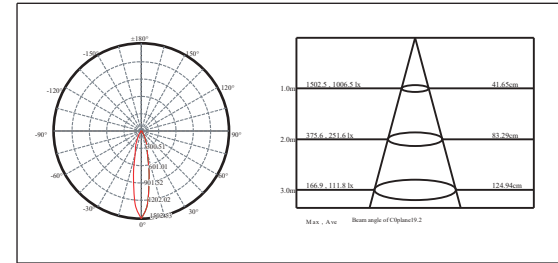


## Optical Accessories 可选配件

### Mounting sleeve 预埋件



WUAS02  
Cut out size: D71mm  
开孔尺寸: D71mm



Unit: mm

### IP68 junction box 防水接线盒



JB1001  
For single fixture installation  
单灯安装



WCC001  
For continuous fixtures installation  
连续安装

### Optional finish 可选颜色




MB  
Matt Black  
氧化雾黑




MS  
Matt Silver  
氧化雾银


## RECESSED LIGHT 埋地灯



DEXWUL0712A



DEXWUL0712B



DEXWUL0712C

Unit: mm

Item number 产品型号	Watts 功率	Input Volt 输入电压	CCT 色温	LED Lumens 光通量	Beam Angle 光束角	Cut out 开孔尺寸	Recess 安装深度
DEXWUL0712A	7W	24V	3000K	750lm	38°	D65	110
DEXWUL0712B	7W	24V	3000K	750lm	38°	D65	110
DEXWUL0712C	7W	24V	3000K	750lm	38°	D65	110

## Features 产品特点

**Stainless Steel Walkover Up Light**  
For outdoor inground / recessed / path / decking

LED: 7W  
Reduced Glare: Sunken light source  
Beam Angle: 15° / 25° / 38° / 60°  
Color Temperature: 2700K / 3000K / 4000K  
Finish: Satin 316 Stainless Steel  
IP rated: IP67  
Cut out: D65 (for deck mounting)

24VDC input, built-in DC driver with 2M of power cable

3 year limited guarantee


**不锈钢埋地灯**  
适用于户外：广场、走道、庭院、花园区域

LED: 7W  
光束角：15° / 25° / 38° / 60°  
色温：2700K / 3000K / 4000K  
颜色：不锈钢316  
防护等级：IP67  
开孔尺寸：D65 (嵌入安装)

输入电压：24VDC；内置DC-DC驱动，自带配线长度2米

3年有限整灯品质保证

## Optical Specification 配光曲线

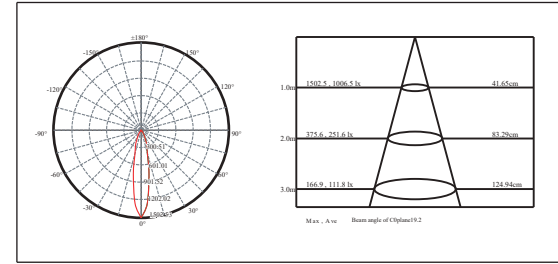


## Optical Accessories 可选配件

### Mounting sleeve 预埋件



WUAS02  
Cut out size: D71mm  
开孔尺寸：D71mm



Unit: mm

### IP68 junction box 防水接线盒



JB2001  
For single fixture installation  
单灯安装



JB3001  
For continuous fixtures installation  
连续安装

### Optional finish 可选颜色



MB  
Matt Black  
氧化雾黑



MS  
Matt Silver  
氧化雾银

## RECESSED LIGHT 埋地灯



Item number 产品型号	Watts 功率	Input Volt 输入电压	CCT 色温	LED Lumens 光通量	Beam Angle 光束角	Cut out 开孔尺寸	Recess 安装深度
DEXWUL0101A	1W	12/24V	3000K	120lm	21°	D40	60
DEXWUL0101B	1W	12/24V	3000K	120lm	21°	D40	60

## Features 产品特点

**Aluminium Walkover Up Light**  
For outdoor inground / recessed / path / decking

LED: 1W  
Reduced Glare: Sunken light source  
Beam Angle: 10° / 15° / 21° / 36° / 60°  
Color Temperature: 2700K / 3000K / 4000K  
Finish: Matt Silver Anodized  
IP rated: IP67  
Cut out: D40 (for deck mounting)

12/24VDC input, built-in DC driver with 2M of power cable

3 year limited guarantee


**铝制埋地灯**  
适用于户外：走道、庭院、花园区域

LED: 1W  
光束角：10° / 15° / 21° / 36° / 60°  
色温：2700K / 3000K / 4000K  
颜色：氧化雾银  
防护等级：IP67  
开孔尺寸：D40 (嵌入安装)

输入电压：12 / 24VDC; 内置DC-DC驱动·自带配线长度2米

3年有限整灯品质保证

## Optical Specification 配光曲线

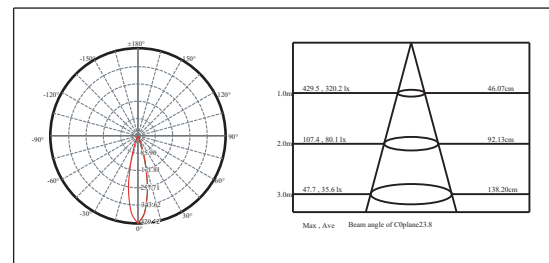

## Optical Accessories 可选配件


### Mounting sleeve 预埋件



### Anti-glare glass lens 光学配件



### IP68 junction box 防水接线盒

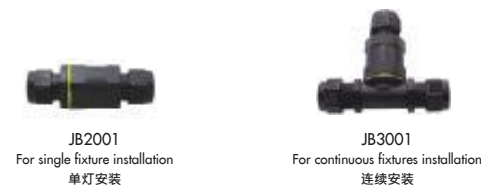

### Optional finish 可选颜色



## RECESSED LIGHT 埋地灯



Item number 产品型号	Watts 功率	Input Volt 输入电压	CCT 色温	LED Lumens 光通量	Beam Angle 光束角	Cut out 开孔尺寸	Recess 安装深度
DEXWUL0501A	5W	12/24V	3000K	550lm	40°	D51	100
DEXWUL0501B	5W	12/24V	3000K	550lm	40°	D51	100
DEXWUL0301A	3W	12/24V	3000K	250lm	20°	D51	100
DEXWUL0301B	3W	12/24V	3000K	250lm	20°	D51	100

## Features 产品特点

### Aluminium Walkover Up Light

For outdoor inground / recessed / path / decking

LED: 5W / 3W  
Beam Angle: 5W (24° / 40° / 60°); 3W (20° / 40° / 60°)  
Color Temperature: 2700K / 3000K / 4000K  
Finish: Matt Silver Anodized  
IP rated: IP67  
Cut out: D51 (for deck mounting)

12/24VDC input, built-in DC driver with 2M of power cable  
(5W: Input wattage must be 3 times higher than the rated LED wattage to insure LED start-up)

3 year limited guarantee

### 铝制埋地灯


适用于户外：广场、走道、庭院、花园区域

LED: 5W / 3W  
光束角：5W (24° / 40° / 60°); 3W (20° / 40° / 60°)  
色温：2700K / 3000K / 4000K  
颜色：氧化雾银  
防护等级：IP67  
开孔尺寸：D51 (嵌入安装)

输入电压：12 / 24VDC; 内置DC-DC驱动·自带配线长度2米  
(注：因5W内置驱动启动电流要求较高·请保证电源功率高于灯具功率4倍)

3年有限整灯品质保证

## Optical Specification 配光曲线

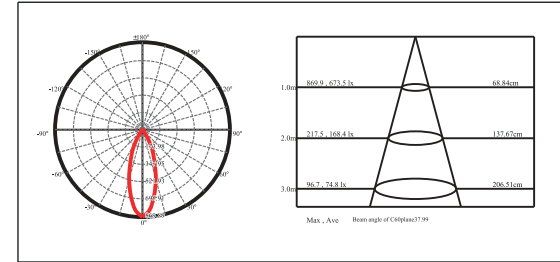


## Optical Accessories 可选配件

### Mounting sleeve 预埋件



WUAS01  
Cut out size: D60mm  
开孔尺寸: D60mm



Unit: mm


### Anti-glare glass lens 光学配件



WUAG01F  
Frosted glass lens  
喷砂玻璃



WUAG01W  
Silk-screen glass lens  
丝印玻璃



Unit: mm

### IP68 junction box 防水接线盒



JB2001  
For single fixture installation  
单灯安装



JB3001  
For continuous fixtures installation  
连续安装

### Optional finish 可选颜色




MB  
Matt Black  
氧化雾黑



SS  
Stainless Steel  
不锈钢色

## RECESSED LIGHT 埋地灯

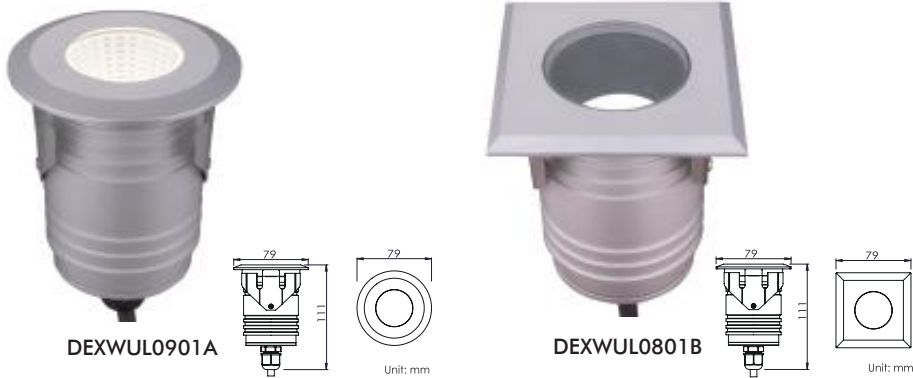

Item number 产品型号	Watts 功率	Input Volt 输入电压	CCT 色温	LED Lumens 光通量	Beam Angle 光束角	Cut out 开孔尺寸	Recess 安装深度
DEXWUL0901A	9W	12/24V	3000K	1050lm	38°	D65	115
DEXWUL0901B	9W	12/24V	3000K	1050lm	38°	D65	115
DEXWUL0801A	8W	12/24V	3000K	750lm	25°	D65	115
DEXWUL0801B	8W	12/24V	3000K	750lm	25°	D65	115

## Features 产品特点

**Aluminium Walkover Up Light**  
For outdoor inground / recessed / path / decking

LED: 9W / 8W  
Beam Angle: 9W (20° / 30° / 38°); 8W (25° / 40° / 60°)  
Color Temperature: 2700K / 3000K / 4000K  
Finish: Matt Silver Anodized  
IP rated: IP67  
Cut out: D65 (for deck mounting)

12/24VDC input, built-in DC driver with 2M of power cable  
(9W: Input wattage must be 2 times higher than the rated LED wattage to insure LED start-up)

3 year limited guarantee


**铝制埋地灯**  
适用于户外：走道、庭院、花园区域

LED: 9W / 8W  
光束角：9W (20° / 30° / 38°); 8W (25° / 40° / 60°)  
色温：2700K / 3000K / 4000K  
颜色：氧化雾银  
防护等级：IP67  
开孔尺寸：D65 (嵌入安装)

输入电压：12 / 24VDC; 内置DC-DC驱动·自带配线长度2米  
(注：因9W内置驱动启动电流要求较高·请保证电源功率高于灯具功率3倍)

3年有限整灯品质保证

## Optical Specification 配光曲线

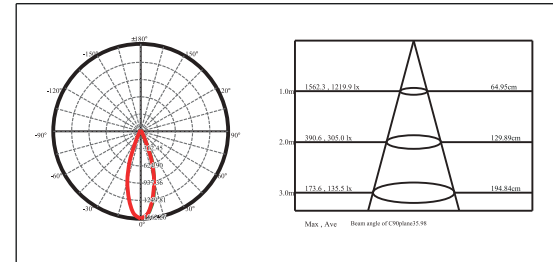

## Optical Accessories 可选配件

### Mounting sleeve 预埋件



### Anti-glare glass lens 光学配件



### IP68 junction box 防水接线盒




### Optional finish 可选颜色



## RECESSED LIGHT 埋地灯




DEXDUL0501A



Unit: mm



DEXDUL0301B



Unit: mm

Item number 产品型号	Watts 功率	Input Volt 输入电压	CCT 色温	LED Lumens 光通量	Beam Angle 光束角	Cut out 开孔尺寸	Recess 安装深度
DEXDUL0501A	5W	12/24V	3000K	550lm	40°	D57	105
DEXDUL0501B	5W	12/24V	3000K	550lm	40°	D57	105
DEXDUL0301A	3W	12/24V	3000K	250lm	20°	D57	105
DEXDUL0301B	3W	12/24V	3000K	250lm	20°	D57	105

## Features 产品特点

**Stainless Steel Driveover Up Light**  
For outdoor inground / recessed / path / decking

LED: 5W / 3W  
Beam Angle: 5W (24° / 40° / 60°); 3W (20° / 40° / 60°)  
Color Temperature: 2700K / 3000K / 4000K  
Finish: Satin 316 Stainless Steel  
IP rated: IP67  
Cut out: D57 (for deck mounting)

12/24VDC input, built-in DC driver with 2M of power cable  
(5W: Input wattage must be 3 times higher than the rated LED wattage to insure LED start-up)

3 year limited guarantee


**不锈钢埋地灯**  
适用于户外：走道、庭院、花园区域

LED: 5W / 3W  
光束角：5W (24° / 40° / 60°); 3W (20° / 40° / 60°)  
色温：2700K / 3000K / 4000K  
颜色：不锈钢316  
防护等级：IP67  
开孔尺寸：D57 (嵌入安装)

输入电压：12 / 24VDC; 内置DC-DC驱动·自带配线长度2米  
(注：因5W内置驱动启动电流要求较高·请保证电源功率高于灯具功率4倍)

3年有限整灯品质保证

## Optical Specification 配光曲线

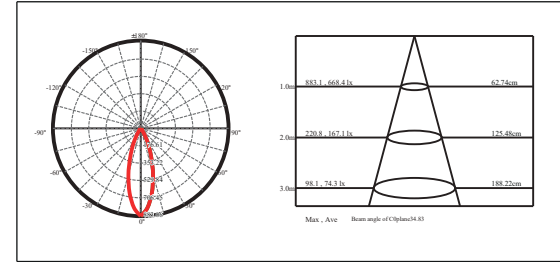


## Optical Accessories 可选配件

### Mounting sleeve 预埋件



WUAS01  
Cut out size: D60mm  
开孔尺寸: D60mm



Unit: mm


### Anti-glare glass lens 光学配件



DUAG01F  
Frosted glass lens  
喷砂玻璃



DUAG01W  
Silk-screen glass lens  
丝印玻璃



Unit: mm

### IP68 junction box 防水接线盒



JB2001  
For single fixture installation  
单灯安装




JB3001  
For continuous fixtures installation  
连续安装



## RECESSED LIGHT 埋地灯




DEXDUL0901A



Unit: mm



DEXDUL0801B



Unit: mm

Item number 产品型号	Watts 功率	Input Volt 输入电压	CCT 色温	LED Lumens 光通量	Beam Angle 光束角	Cut out 开孔尺寸	Recess 安装深度
DEXDUL0901A	9W	12/24V	3000K	1050lm	38°	D70	120
DEXDUL0901B	9W	12/24V	3000K	1050lm	38°	D70	120
DEXDUL0801A	8W	12/24V	3000K	750lm	25°	D70	120
DEXDUL0801B	8W	12/24V	3000K	750lm	25°	D70	120

## Features 产品特点

**Stainless Steel Driveover Up Light**  
For outdoor inground / recessed / path / decking

LED: 9W / 8W  
Beam Angle: 9W (20° / 30° / 38°); 8W (25° / 40° / 60°)  
Color Temperature: 2700K / 3000K / 4000K  
Finish: Satin 316 Stainless Steel  
IP rated: IP67  
Cut out: D70 (for deck mounting)

12/24VDC input, built-in DC driver with 2M of power cable  
(9W: Input wattage must be 2 times higher than the rated LED wattage to insure LED start-up)

3 year limited guarantee


**不锈钢埋地灯**  
适用于户外：走道、庭院、花园区域

LED: 9W / 8W  
光束角: 9W (20° / 30° / 38°); 8W (25° / 40° / 60°)  
色温: 2700K / 3000K / 4000K  
颜色: 不锈钢316  
防护等级: IP67  
开孔尺寸: D70 (嵌入安装)

输入电压: 12 / 24VDC; 内置DC-DC驱动·自带配线长度2米  
(注: 因9W内置驱动启动电流要求较高·请保证电源功率高于灯具功率3倍)

3年有限整灯品质保证

## Optical Specification 配光曲线

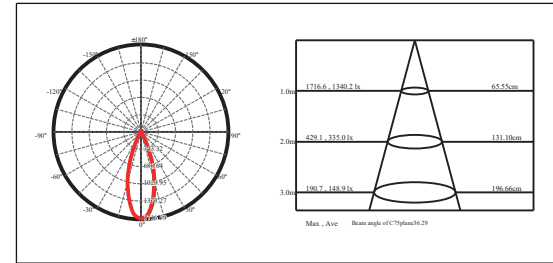


## Optical Accessories 可选配件

### Mounting sleeve 预埋件



WUAS02  
Cut out size: D71mm  
开孔尺寸: D71mm



Unit: mm


### Anti-glare glass lens 光学配件



DUAG02F  
Frosted glass lens  
喷砂玻璃



DUAG02W  
Silk-screen glass lens  
丝印玻璃



Unit: mm

### IP68 junction box 防水接线盒



JB2001  
For single fixture installation  
单灯安装




JB3001  
For continuous fixtures installation  
连续安装


## RECESSED LIGHT 埋地灯



DEXWUL0502A



DEXWUL0502B



Unit: mm

Item number 产品型号	Watts 功率	Input Volt 输入电压	CCT 色温	LED Lumens 光通量	Beam Angle 光束角	Cut out 开孔尺寸	Recess 安装深度
DEXWUL0502A	5W	12/24V	3000K	550lm	40°	D51	105
DEXWUL0502B	5W	12/24V	3000K	550lm	40°	D51	105

## Features 产品特点

### Aluminium Walkover Up Light

For outdoor inground / recessed / path / decking

LED: 5W  
Reduced Glare: Sunken light source  
Beam Angle: 24° / 40° / 60°  
Color Temperature: 2700K / 3000K / 4000K  
Finish: Matt Silver Anodized  
IP rated: IP67  
Cut out: D51 (for deck mounting)

12/24VDC input, built-in DC driver with 2M of power cable  
(Input wattage must be 3 times higher than the rated LED wattage to insure LED start-up)

3 year limited guarantee

### 铝制埋地灯


适用于户外：走道、庭院、花园区域

LED: 5W  
光束角：24° / 40° / 60°  
色温：2700K / 3000K / 4000K  
颜色：氧化雾银  
防护等级：IP67  
开孔尺寸：D51 (嵌入安装)

输入电压：12 / 24VDC；内置DC-DC驱动，自带配线长度2米  
(注：因内置驱动启动电流要求较高，请保证电源功率高于灯具功率4倍)

3年有限整灯品质保证

## Optical Specification 配光曲线

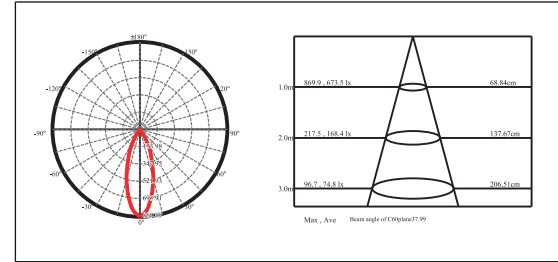


## Optical Accessories 可选配件

### Mounting sleeve 预埋件



WUAS01  
Cut out size: D60mm  
开孔尺寸：D60mm



Unit: mm

### Anti-glare glass lens 光学配件




WUAG04L  
Linear glass lens  
横纹玻璃



WUAG04S  
Soft glass lens  
布纹玻璃



WUAH01  
Honeycomb louver  
蜂巢网片



Unit: mm

### IP68 junction box 防水接线盒



JB2001  
For single fixture installation  
单灯安装



JB3001  
For continuous fixtures installation  
连续安装

### Optional finish 可选颜色



MB  
Matt Black  
氧化雾黑




SS  
Stainless Steel  
不锈钢色

RECESSED LIGHT 埋地灯




DEXWUL0902A



Unit: mm



DEXWUL0902B



Unit: mm

Item number 产品型号	Watts 功率	Input Volt 输入电压	CCT 色温	LED Lumens 光通量	Beam Angle 光束角	Cut out 开孔尺寸	Recess 安装深度
DEXWUL0902A	9W	12/24V	3000K	1050lm	38°	D65	120
DEXWUL0902B	9W	12/24V	3000K	1050lm	38°	D65	120

Features 产品特点

Aluminium Walkover Up Light

For outdoor inground / recessed / path / decking

LED: 9W  
Reduced Glare: Sunken light source  
Beam Angle: 20° / 30° / 38°  
Color Temperature: 2700K / 3000K / 4000K  
Finish: Matt Silver Anodized  
IP rated: IP67  
Cut out: D65 (for deck mounting)

12/24VDC input, built-in DC driver with 2M of power cable  
(Input wattage must be 2 times higher than the rated LED wattage to insure LED start-up)

3 year limited guarantee

铝制埋地灯


适用于户外：走道、庭院、花园区域

LED: 9W  
光束角：20° / 30° / 38°  
色温：2700K / 3000K / 4000K  
颜色：氧化雾银  
防护等级：IP67  
开孔尺寸：D65 (嵌入安装)

输入电压：12 / 24VDC；内置DC-DC驱动，自带配线长度2米  
(注：因内置驱动启动电流要求较高，请保证电源功率高于灯具功率3倍)

3年有限整灯品质保证

Optical Specification 配光曲线

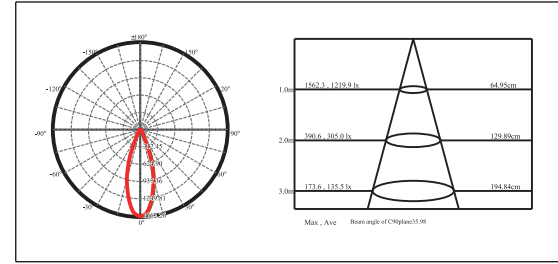


Optical Accessories 可选配件

Mounting sleeve 预埋件



WUAS02  
Cut out size: D71mm  
开孔尺寸：D71mm



Unit: mm

Anti-glare glass lens 光学配件




WUAG05L  
Linear glass lens  
横纹玻璃



WUAG05S  
Soft glass lens  
布纹玻璃



WUAH02  
Honeycomb louver  
蜂巢网片



Unit: mm

IP68 junction box 防水接线盒



JB2001  
For single fixture installation  
单灯安装



JB3001  
For continuous fixtures installation  
连续安装

Optional finish 可选颜色



MB  
Matt Black  
氧化雾黑



SS  
Stainless Steel  
不锈钢色

## RECESSED LIGHT 埋地灯



Item number 产品型号	Watts 功率	Input Volt 输入电压	CCT 色温	LED Lumens 光通量	Beam Angle 光束角	Cut out 开孔尺寸	Recess 安装深度
DEXWUL0103A	1W	12/24V	3000K	120lm	20°	D51	80
DEXWUL0103B	1W	12/24V	3000K	120lm	20°	D51	80
DEXWUL0303A	3W	12/24V	3000K	250lm	20°	D51	80
DEXWUL0303B	3W	12/24V	3000K	250lm	20°	D51	80

## Features 产品特点

Aluminium Walkover Dimmable Up Light  
For outdoor inground / recessed / path / decking

LED: 1W / 3W  
Beam Angle: 20° / 40° / 60°  
Color Temperature: 2700K / 3000K / 4000K  
Finish: Matt Silver Anodized  
IP rated: IP67  
Cut out: D51 (for deck mounting)

12/24VDC input, built-in DC driver with 2M of power cable  
Dimmable support: 1-10V

3 year limited guarantee


铝制调光埋地灯  
适用于户外：广场、走道、庭院、花园区域

LED: 1W / 3W  
光束角：20° / 40° / 60°  
色温：2700K / 3000K / 4000K  
颜色：氧化雾银  
防护等级：IP67  
开孔尺寸：D51 (嵌入安装)

输入电压：12 / 24VDC；内置DC-DC驱动，自带配线长度2米  
调光方式：1-10V

3年有限整灯品质保证

## Optical Specification 配光曲线

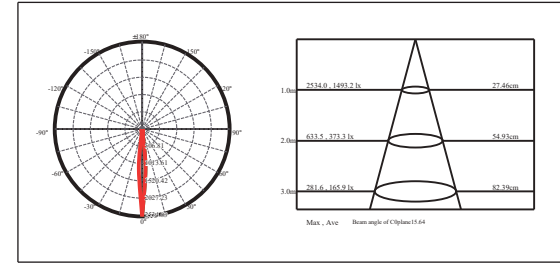

## Optical Accessories 可选配件

### Mounting sleeve 预埋件



### Anti-glare glass lens 光学配件



### IP68 junction box 防水接线盒




### Optional finish 可选颜色



RECESSED LIGHT 埋地灯




DEXWUL0603A



Unit: mm



DEXWUL0803B



Unit: mm

Item number 产品型号	Watts 功率	Input Volt 输入电压	CCT 色温	LED Lumens 光通量	Beam Angle 光束角	Cut out 开孔尺寸	Recess 安装深度
DEXWUL0603A	6W	12/24V	3000K	550lm	25°	D65	80
DEXWUL0603B	6W	12/24V	3000K	550lm	25°	D65	80
DEXWUL0803A	8W	12/24V	3000K	750lm	25°	D65	80
DEXWUL0803B	8W	12/24V	3000K	750lm	25°	D65	80

Features 产品特点

Aluminium Walkover Dimmable Up Light  
For outdoor inground / recessed / path / decking

LED: 6W / 8W  
Beam Angle: 25° / 40° / 60°  
Color Temperature: 2700K / 3000K / 4000K  
Finish: Matt Silver Anodized  
IP rated: IP67  
Cut out: D65 (for deck mounting)

12/24VDC input, built-in DC driver with 2M of power cable  
Dimmable support: 1-10V

3 year limited guarantee


铝制调光埋地灯  
适用于户外：走道、庭院、花园区域

LED: 6W / 8W  
光束角：25° / 40° / 60°  
色温：2700K / 3000K / 4000K  
颜色：氧化雾银  
防护等级：IP67  
开孔尺寸：D65 (嵌入安装)

输入电压：12 / 24VDC；内置DC-DC驱动，自带配线长度2米  
调光方式：1-10V

3年有限整灯品质保证

Optical Specification 配光曲线

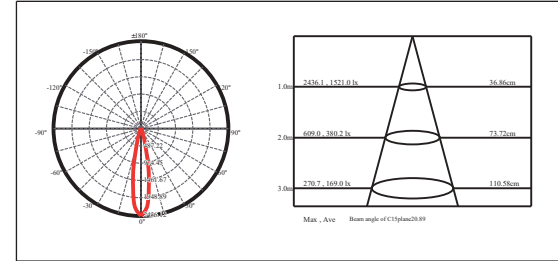


Optical Accessories 可选配件

Mounting sleeve 预埋件



WUAS02  
Cut out size: D71mm  
开孔尺寸：D71mm



Unit: mm

Anti-glare glass lens 光学配件




SPAG02L  
Linear glass lens  
横纹玻璃



SPAG02S  
Soften glass lens  
布纹玻璃



SPAH02  
Honeycomb louver  
蜂巢网片



Unit: mm

IP68 junction box 防水接线盒



JB2001  
For single fixture installation  
单灯安装



JB3001  
For continuous fixtures installation  
连续安装

Optional finish 可选颜色



MB  
Matt Black  
氧化雾黑



SS  
Stainless Steel  
不锈钢色



Spot light

SPOT  
LIGHT




投射灯


## SPOT LIGHT 投射灯



DEXSPL0111A



DEXSPL0111B



Item number 产品型号	Watts 功率	Input Current 输入电流	CCT 色温	LED Lumens 光通量	Beam Angle 光束角	Cable length 电线长度
DEXSPL0111A	1W	350mA	3000K	120lm	21°	2M
DEXSPL0111B	1W	350mA	3000K	120lm	21°	2M

## Features 产品特点

### Aluminium Spot Light

For outdoor access/spot/wall wash/landscape

LED: 1W

Reduced Glare: Sunken light source

Beam Angle: 10° / 15° / 21° / 36° / 60°

Color Temperature: 2700K / 3000K / 4000K

Finish: Matt Black Anodized

IP rated: IP67

Mounting Type: U bracket for solid ground; spike for soft ground

Input Current: 350mA, 3-4V DC with 2M of power cable

Dimmable support: DALI / DMX / 1-10V / Triac / PWM

3 year limited guarantee

### 铝制投射灯

适用于户外：走道、庭院、花园区域

LED: 1W

光束角：10° / 15° / 21° / 36° / 60°

色温：2700K / 3000K / 4000K

颜色：氧化雾黑

防护等级：IP67


安装方式：U形支架 / 地插

输入电流：350mA, 3-4V DC; 自带配线长度2米

调光方式：DALI / DMX / 1-10V / 可控硅 / PWM

3年有限整灯品质保证

## Optical Specification 配光曲线

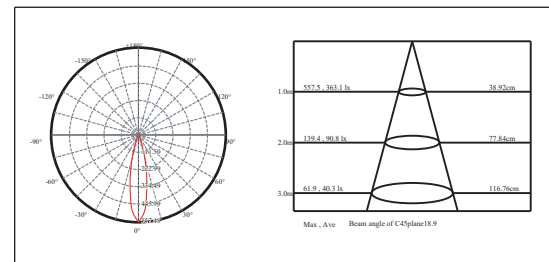


## Optical Accessories 可选配件

### Spike 地插



SPAS03



### Anti-glare glass lens 光学配件




WUAG06L  
Linear glass lens  
横纹玻璃



WUAG06S  
Soften glass lens  
布纹玻璃



WUAH03  
Honeycomb louver  
蜂巢网片



Unit: mm

### IP68 junction box 防水接线盒



JB1001  
For single fixture installation  
单灯安装




WCC001  
For continuous fixtures installation  
连续安装

## SPOT LIGHT 投射灯




DEXSPL0112A



Unit: mm



DEXSPL0112B



Unit: mm

Item number 产品型号	Watts 功率	Input Volt 输入电压	CCT 色温	LED Lumens 光通量	Beam Angle 光束角	Cable length 电线长度
DEXSPL0112A	1W	12/24V	3000K	120lm	21°	2M
DEXSPL0112B	1W	12/24V	3000K	120lm	21°	2M

## Features 产品特点

### Aluminium Spot Light

For outdoor access/spot/wall wash/landscape

LED: 1W

Reduced Glare: Sunken light source

Beam Angle: 10° / 15° / 21° / 36° / 60°

Color Temperature: 2700K / 3000K / 4000K

Finish: Matt Black Anodized

IP rated: IP67

Mounting Type: U bracket for solid ground; spike for soft ground

12/24VDC input, built-in DC driver with 2M of power cable

3 year limited guarantee

### 铝制投射灯

适用于户外：走道、庭院、花园区域

LED: 1W

光束角：10° / 15° / 21° / 36° / 60°

色温：2700K / 3000K / 4000K

颜色：氧化雾黑


防护等级：IP67

安装方式：U形支架 / 地插

输入电压：12 / 24VDC；内置DC-DC驱动·自带配线长度2米

3年有限整灯品质保证

## Optical Specification 配光曲线

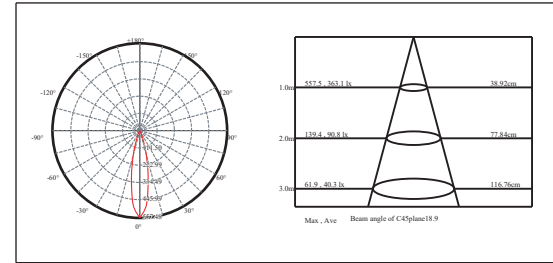


## Optical Accessories 可选配件

### Spike 地插



SPAS01



Unit: mm

### Anti-glare glass lens 光学配件




WUAG06L  
Linear glass lens  
横纹玻璃



WUAG06S  
Soft glass lens  
布纹玻璃



WUAH03  
Honeycomb louver  
蜂巢网片



Unit: mm

### IP68 junction box 防水接线盒



JB2001  
For single fixture installation  
单灯安装




JB3001  
For continuous fixtures installation  
连续安装



## SPOT LIGHT 投射灯




BE-SPL0312A



Unit: mm



BE-SPL0312B



Unit: mm

Item number 产品型号	Watts 功率	Input Volt 输入电压	CCT 色温	LED Lumens 光通量	Beam Angle 光束角	Cable length 电线长度
BE-SPL0312A	3W	12/24V	3000K	250lm	10°	2M
BE-SPL0312B	3W	12/24V	3000K	250lm	10°	2M

## Features 产品特点

### Aluminium Spot Light

For outdoor access/spot/wall wash/landscape

LED: 3W

Reduced Glare: Sunken light source

Beam Angle: 3° / 6° / 10° / 20° / 40°

Color Temperature: 2700K / 3000K / 4000K

Finish: Matt Black Anodized

IP rated: IP67

Mounting Type: U bracket for solid ground; spike for soft ground

12/24VDC input, built-in DC driver with 2M of power cable

3 year limited guarantee

### 铝制投射灯

适用于户外：走道、庭院、花园区域

LED: 3W

光束角：3° / 6° / 10° / 20° / 40°

色温：2700K / 3000K / 4000K

颜色：氧化雾黑


防护等级：IP67

安装方式：U形支架 / 地插

输入电压：12 / 24VDC；内置DC-DC驱动·自带配线长度2米

3年有限整灯品质保证

## Optical Specification 配光曲线

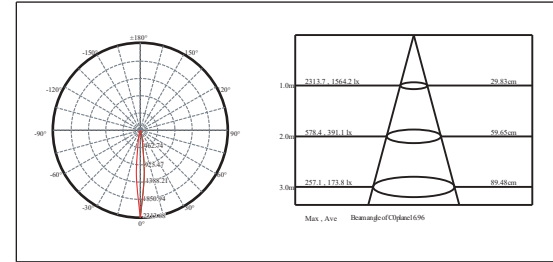


## Optical Accessories 可选配件

### Spike 地插



SPAS01



Unit: mm

### Anti-glare glass lens 光学配件




SPAG02L  
Linear glass lens  
横纹玻璃



SPAG02S  
Soft glass lens  
布纹玻璃



SPAH02  
Honeycomb louver  
蜂巢网片



Unit: mm

### IP68 junction box 防水接线盒




JB2001  
For single fixture installation  
单灯安装



JB3001  
For continuous fixtures installation  
连续安装

## SPOT LIGHT 投射灯

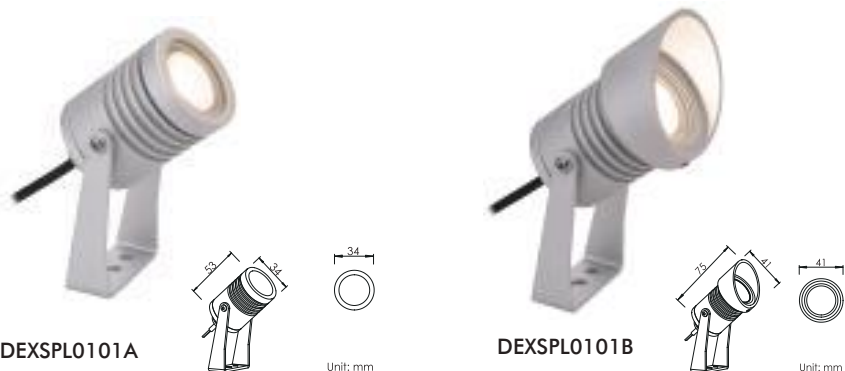

Item number 产品型号	Watts 功率	Input Volt 输入电压	CCT 色温	LED Lumens 光通量	Beam Angle 光束角	Cable length 电线长度
DEXSPL0101A	1W	12/24V	3000K	120lm	21°	2M
DEXSPL0101B	1W	12/24V	3000K	120lm	21°	2M

## Features 产品特点

### Aluminium Spot Light

For outdoor access/spot/wall wash/landscape

LED: 1W  
Beam Angle: 21° / 36°  
Color Temperature: 2700K / 3000K / 4000K  
Finish: Matt Silver Anodized  
IP rated: IP65  
Mounting Type: U bracket for solid ground; spike for soft ground

12/24VDC input, built-in DC driver with 2M of power cable

3 year limited guarantee

### 铝制投射灯


适用于户外：走道、庭院、花园区域

LED: 1W  
光束角：21° / 36°  
色温：2700K / 3000K / 4000K  
颜色：氧化雾银  
防护等级：IP65  
安装方式：U形支架 / 地插

输入电压：12 / 24VDC；内置DC-DC驱动·自带配线长度2米

3年有限整灯品质保证

## Optical Specification 配光曲线

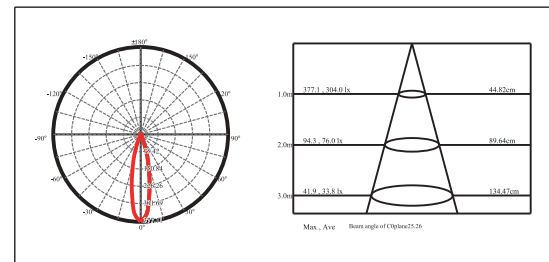

## Optical Accessories 可选配件


### Spike 地插



### Anti-glare glass lens 光学配件




### IP68 junction box 防水接线盒

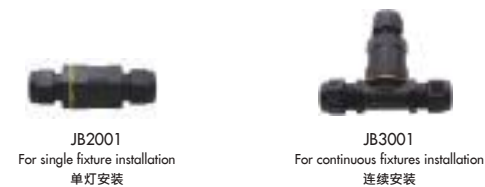

### Optional finish 可选颜色



## SPOT LIGHT 投射灯

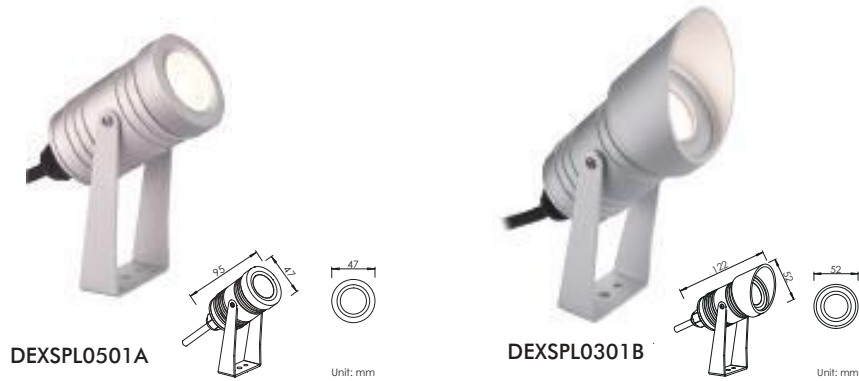

Item number 产品型号	Watts 功率	Input Volt 输入电压	CCT 色温	LED Lumens 光通量	Beam Angle 光束角	Cable length 电线长度
DEXSPL0301A	3W	12/24V	3000K	250lm	20°	2M
DEXSPL0301B	3W	12/24V	3000K	250lm	20°	2M
DEXSPL0501A	5W	12/24V	3000K	550lm	24°	2M
DEXSPL0501B	5W	12/24V	3000K	550lm	24°	2M

## Features 产品特点

### Aluminium Spot Light

For outdoor access/spot/wall wash/landscape

LED: 5W / 3W  
Beam Angle: 5W (24° / 40° / 60°); 3W (20° / 40° / 60°)  
Color Temperature: 2700K / 3000K / 4000K  
Finish: Matt Silver Anodized  
IP rated: IP67  
Mounting Type: U bracket for solid ground; spike for soft ground

12/24VDC input, built-in DC driver with 2M of power cable  
(5W: Input wattage must be 3 times higher than the rated LED wattage to insure LED start-up)

3 year limited guarantee

### 铝制投射灯


适用于户外：走道、庭院、花园区域

LED: 5W / 3W  
光束角：5W (24° / 40° / 60°); 3W (20° / 40° / 60°)  
色温：2700K / 3000K / 4000K  
颜色：氧化雾银  
防护等级：IP67  
安装方式：U形支架 / 地插

输入电压：12 / 24VDC；内置DC-DC驱动·自带配线长度2米  
(注：因5W内置驱动启动电流要求较高·请保证电源功率高于灯具功率4倍)

3年有限整灯品质保证

## Optical Specification 配光曲线

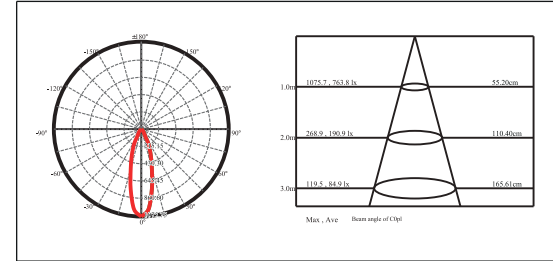

## Optical Accessories 可选配件

### Spike 地插



### Anti-glare glass lens 光学配件




### IP68 junction box 防水接线盒



### Optional finish 可选颜色



## SPOT LIGHT 投射灯

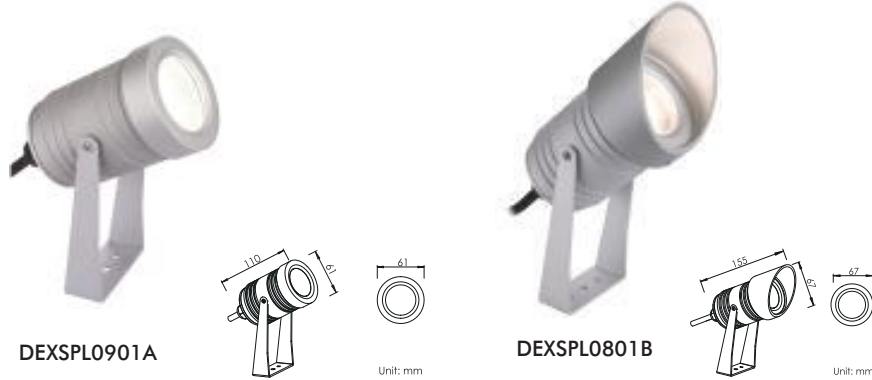

Item number 产品型号	Watts 功率	Input Volt 输入电压	CCT 色温	LED Lumens 光通量	Beam Angle 光束角	Cable length 电线长度
DEXSPL0801A	8W	12/24V	3000K	750lm	25°	2M
DEXSPL0801B	8W	12/24V	3000K	750lm	25°	2M
DEXSPL0901A	9W	12/24V	3000K	1050lm	20°	2M
DEXSPL0901B	9W	12/24V	3000K	1050lm	20°	2M

## Features 产品特点

### Aluminium Spot Light

For outdoor access/spot/wall wash/landscape

LED: 9W / 8W  
Beam Angle: 9W (20° / 30° / 38°); 8W (25° / 40° / 60°)  
Color Temperature: 2700K / 3000K / 4000K  
Finish: Matt Silver Anodized  
IP rated: IP67  
Mounting Type: U bracket for solid ground; spike for soft ground

12/24VDC input, built-in DC driver with 2M of power cable  
(9W: Input wattage must be 2 times higher than the rated LED wattage to insure LED start-up)

3 year limited guarantee

### 铝制投射灯


适用于户外：走道、庭院、花园区域

LED: 9W / 8W  
光束角：9W (20° / 30° / 38°); 8W (25° / 40° / 60°)  
色温：2700K / 3000K / 4000K  
颜色：氧化雾银  
防护等级：IP67  
安装方式：U形支架 / 地插

输入电压：12 / 24VDC; 内置DC-DC驱动·自带配线长度2米  
(注：因9W内置驱动启动电流要求较高·请保证电源功率高于灯具功率3倍)

3年有限整灯品质保证

## Optical Specification 配光曲线

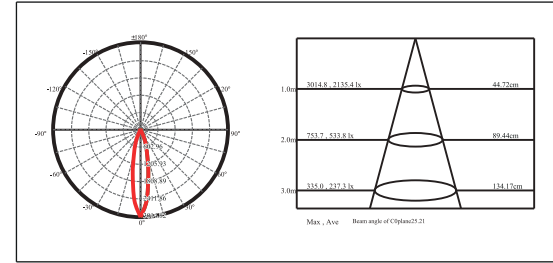

## Optical Accessories 可选配件

### Spike 地插



### Anti-glare glass lens 光学配件



### IP68 junction box 防水接线盒



### Optional finish 可选颜色



MB  
Matt Black  
氧化雾黑

## SPOT LIGHT 投射灯



DEXSPL0701A



DEXSPL0701B

Unit: mm

Unit: mm

Item number 产品型号	Watts 功率	Input Volt 输入电压	CCT 色温	LED Lumens 光通量	Beam Angle 光束角	Cable length 电线长度
BE-SPL0701A	7W	24V	3000K	500lm	12°	2M
BE-SPL0701B	7W	24V	3000K	500lm	12°	2M

## Features 产品特点

### Aluminium Spot Light

For outdoor access/spot/wall wash/landscape

LED: 7W

Reduced Glare: Sunken light source

Beam Angle: 12° / 17° / 25° / 40° / 60°

Color Temperature: 2700K / 3000K / 4000K

Finish: Matt Black Anodized

IP rated: IP67

Mounting Type: U bracket for solid ground; spike for soft ground

24VDC input, built-in DC driver with 2M of power cable

3 year limited guarantee

### 铝制投射灯

适用于户外：走道、庭院、花园区域

LED: 7W

光束角：12° / 17° / 25° / 40° / 60°

色温：2700K / 3000K / 4000K

颜色：氧化雾黑

防护等级：IP67


安装方式：U形支架 / 地插

输入电压：24VDC；内置DC-DC驱动，自带配线长度2米

3年有限整灯品质保证

Patent 专利 #: ZL 2015 2 0276208.6

## Optical Specification 配光曲线

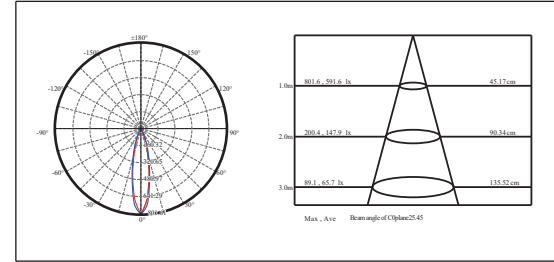


## Optical Accessories 可选配件

### Spike 地插



SPAS01



Unit: mm

### IP68 junction box 防水接线盒



JB2001


For single fixture installation  
单灯安装



JB3001

For continuous fixtures installation  
连续安装

## SPOT LIGHT 投射灯

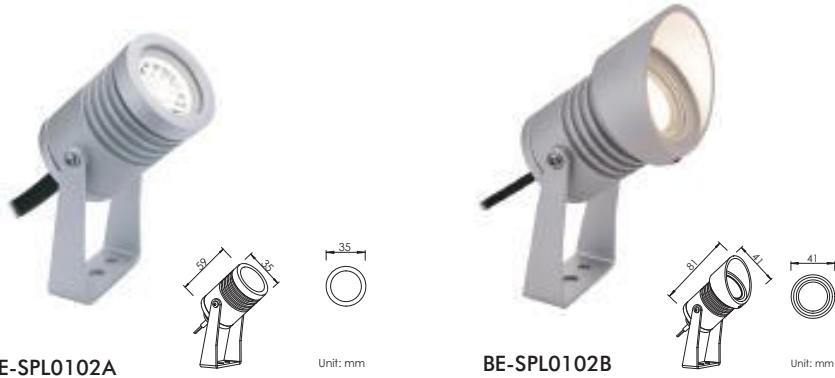

Item number 产品型号	Watts 功率	Input Volt 输入电压	CCT 色温	LED Lumens 光通量	Beam Angle 光束角	Cable length 电线长度
BE-SPL0102A	1W	12/24V	3000K	120lm	21°	2M
BE-SPL0102B	1W	12/24V	3000K	120lm	21°	2M

## Features 产品特点

### Aluminium Spot Light

For outdoor access/spot/wall wash/landscape

LED: 1W

Beam Angle: 10° / 15° / 21° / 36° / 60°

Color Temperature: 2700K / 3000K / 4000K

Finish: Matt Silver Anodized

IP rated: IP67

Mounting Type: U bracket for solid ground; spike for soft ground

12/24VDC input, built-in DC driver with 2M of power cable

3 year limited guarantee

### 铝制投射灯

适用于户外：走道、庭院、花园区域

LED: 1W

光束角：10° / 15° / 21° / 36° / 60°

色温：2700K / 3000K / 4000K

颜色：氧化雾银

防护等级：IP67


安装方式：U形支架 / 地插

输入电压：12 / 24VDC；内置DC-DC驱动，自带配线长度2米

3年有限整灯品质保证


Patent 专利 #: ZL 2015 2 0276208.6

## Optical Specification 配光曲线

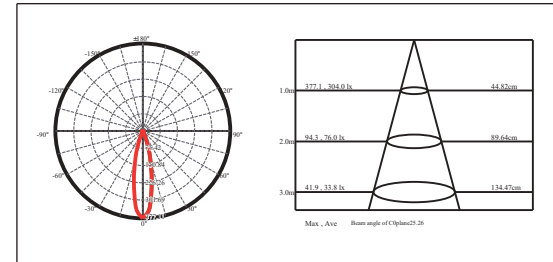

## Optical Accessories 可选配件

### Spike 地插



### Anti-glare glass lens 光学配件




WUAG06L  
Linear glass lens  
横纹玻璃



WUAG06S  
Soften glass lens  
布纹玻璃



WUAH03  
Honeycomb louver  
蜂巢网片



### IP68 junction box 防水接线盒



JB2001  
For single fixture installation  
单灯安装




JB3001  
For continuous fixtures installation  
连续安装

### Optional finish 可选颜色



MB  
Matt Black  
氧化雾黑

## SPOT LIGHT 投射灯

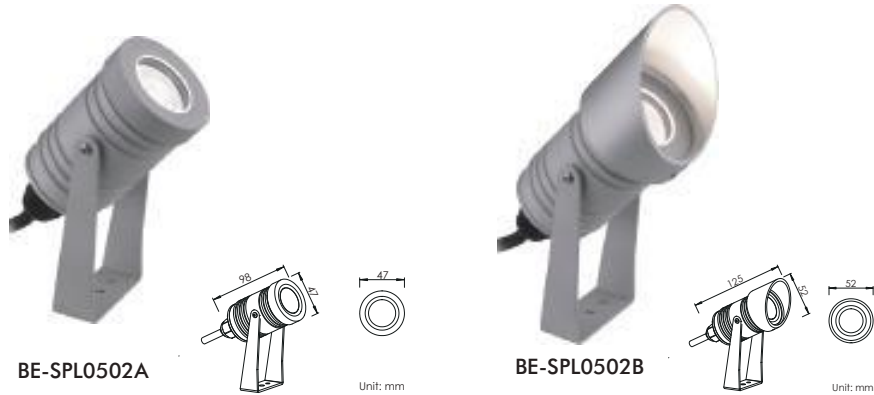

BE-SPL0502A

BE-SPL0502B

Item number 产品型号	Watts 功率	Input Volt 输入电压	CCT 色温	LED Lumens 光通量	Beam Angle 光束角	Cable length 电线长度
BE-SPL0502A	5W	12/24V	3000K	550lm	24°	2M
BE-SPL0502B	5W	12/24V	3000K	550lm	24°	2M

## Features 产品特点

### Aluminium Spot Light

For outdoor access/spot/wall wash/landscape

LED: 5W

Reduced Glare: Sunken light source

Beam Angle: 24° / 40° / 60°

Color Temperature: 2700K / 3000K / 4000K

Finish: Matt Silver Anodized

IP rated: IP67

Mounting Type: U bracket for solid ground; spike for soft ground

12/24VDC input, built-in DC driver with 2M of power cable  
(Input wattage must be 3 times higher than the rated LED wattage to insure LED start-up)

3 year limited guarantee

Patent 专利 #: ZL 2015 2 0276208.6

### 铝制投射灯

适用于户外：走道、庭院、花园区域

LED: 5W

光束角：24° / 40° / 60°

色温：2700K / 3000K / 4000K

颜色：氧化雾银


防护等级：IP67

安装方式：U形支架 / 地插

输入电压：12 / 24VDC；内置DC-DC驱动，自带配线长度2米  
(注：因内置驱动启动电流要求较高，请保证电源功率高于灯具功率4倍)

3年有限整灯品质保证

## Optical Specification 配光曲线

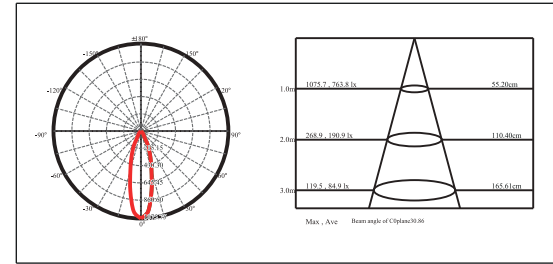

## Optical Accessories 可选配件

### Spike 地插



SPAS01

Unit: mm

### Anti-glare glass lens 光学配件



WUAG04L  
Linear glass lens  
横纹玻璃

WUAG04S  
Soften glass lens  
布纹玻璃

WUAH01  
Honeycomb louver  
蜂巢网片

Unit: mm

### IP68 junction box 防水接线盒



JB2001  
For single fixture installation  
单灯安装

JB3001  
For continuous fixtures installation  
连续安装

### Optional finish 可选颜色



MB  
Matt Black  
氧化雾黑

## SPOT LIGHT 投射灯



Item number 产品型号	Watts 功率	Input Volt 输入电压	CCT 色温	LED Lumens 光通量	Beam Angle 光束角	Cable length 电线长度
BE-SPL0902A	9W	12/24V	3000K	1050lm	20°	2M
BE-SPL0902B	9W	12/24V	3000K	1050lm	20°	2M

## Features 产品特点

### Aluminium Spot Light

For outdoor access/spot/wall wash/landscape

LED: 9W

Reduced Glare: Sunken light source

Beam Angle: 20° / 30° / 38°

Color Temperature: 2700K / 3000K / 4000K

Finish: Matt Silver Anodized

IP rated: IP67

Mounting Type: U bracket for solid ground; spike for soft ground

12/24VDC input, built-in DC driver with 2M of power cable  
(Input wattage must be 2 times higher than the rated LED wattage to insure LED start-up)

3 year limited guarantee

### 铝制投射灯

适用于户外：走道、庭院、花园区域

LED: 9W

光束角：20° / 30° / 38°

色温：2700K / 3000K / 4000K

颜色：氧化雾银

防护等级：IP67


安装方式：U形支架 / 地插

输入电压：12 / 24VDC；内置DC-DC驱动，自带配线长度2米  
(注：因内置驱动启动电流要求较高，请保证电源功率高于灯具功率3倍)

3年有限整灯品质保证

Patent 专利 #: ZL 2015 2 0276208.6

## Optical Specification 配光曲线

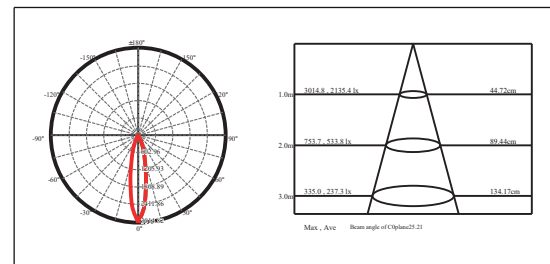

## Optical Accessories 可选配件

### Spike 地插



### Anti-glare glass lens 光学配件



### IP68 junction box 防水接线盒



### Optional finish 可选颜色





## SPOT LIGHT 投射灯



Item number 产品型号	Watts 功率	Input Volt 输入电压	CCT 色温	LED Lumens 光通量	Beam Angle 光束角	Cable length 电线长度
BE-SPL0103	1W	12/24V	3000K	120lm	21°	2M
BE-SPL0303	3W	12/24V	3000K	250lm	20°	2M
BE-SPL0503	5W	12/24V	3000K	550lm	24°	2M
BE-SPL0903	9W	12/24V	3000K	1050lm	20°	2M

Unit: mm

## Features 产品特点

### Brass Spot Light

For outdoor access/spot/wall wash/landscape

LED: 1W / 3W / 5W / 9W

Reduced Glare: Sunken light source

Beam Angle: 1W (21° / 36°); 3W (20° / 40° / 60°);

5W (24° / 40° / 60°); 9W (20° / 30° / 38°)

Color Temperature: 2700K / 3000K / 4000K

Finish: Antique Brass

IP rated: IP67

Mounting Type: U bracket for solid ground; spike for soft ground

12/24VDC input, built-in DC driver with 2M of power cable

(5W: Input wattage must be 3 times higher than the rated LED wattage to insure LED start-up; 9W: Input wattage must be 2 times higher than the rated LED wattage to insure LED start-up)

3 year limited guarantee

### 铜制投射灯

适用于户外：走道、庭院、花园区域

LED: 1W / 3W / 5W / 9W

光束角：1W (21° / 36°); 3W (20° / 40° / 60°);

5W (24° / 40° / 60°); 9W (20° / 30° / 38°)

色温：2700K / 3000K / 4000K

颜色：青古铜色

防护等级：IP67


安装方式：U形支架 / 地插

输入电压：12 / 24VDC; 内置DC-DC驱动·自带配线长度2米

(注：因5W内置驱动启动电流要求较高·请保证电源功率高于灯具功率4倍；因9W内置驱动启动电流要求较高·请保证电源功率高于灯具功率3倍)

3年有限整灯品质保证

## Optical Specification 配光曲线

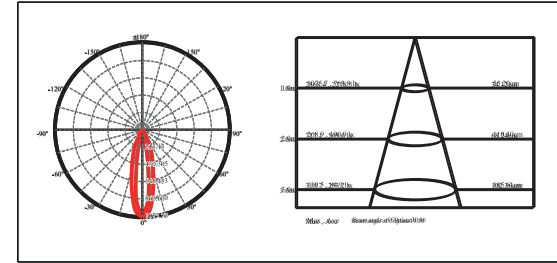


## Optical Accessories 可选配件

### Spike 地插



SPAS01



Unit: mm

### IP68 junction box 防水接线盒



JB2001  
For single fixture installation  
单灯安装



JB3001  
For continuous fixtures installation  
连续安装

## Optional finish 可选颜色



BB  
Brushed Brass  
黄铜色

## SPOT LIGHT 投射灯



Item number 产品型号	Watts 功率	Input Volt 输入电压	CCT 色温	LED Lumens 光通量	Beam Angle 光束角	Cable length 电线长度
BE-SPL0105	1W	12/24V	3000K	120lm	21°	2M
BE-SPL0505	5W	12/24V	3000K	550lm	24°	2M
BE-SPL0905	9W	12/24V	3000K	1050lm	20°	2M

Unit: mm

## Features 产品特点

### Brass Spot Light

For outdoor access/spot/wall wash/landscape

LED: 1W / 5W / 9W

Reduced Glare: Sunken light source

Beam Angle: 1W (21° / 36°); 5W (24° / 40° / 60°);  
9W (20° / 30° / 38°)

Color Temperature: 2700K / 3000K / 4000K

Finish: Matt Silver Anodized

IP rated: IP67

Mounting Type: U bracket for solid ground; spike for soft ground

12/24VDC input, built-in DC driver with 2M of power cable  
(5W: Input wattage must be 3 times higher than the rated LED wattage to insure LED start-up; 9W: Input wattage must be 2 times higher than the rated LED wattage to insure LED start-up)

3 year limited guarantee

### 铜制投射灯

适用于户外：走道、庭院、花园区域

LED: 1W / 5W / 9W

光束角：1W (21° / 36°); 5W (24° / 40° / 60°);  
9W (20° / 30° / 38°)

色温：2700K / 3000K / 4000K

颜色：氧化雾银


防护等级：IP67

安装方式：U形支架 / 地插

输入电压：12 / 24VDC; 内置DC-DC驱动，自带配线长度2米  
(注：因5W内置驱动启动电流要求较高，请保证电源功率高于灯具功率4倍；因9W内置驱动启动电流要求较高，请保证电源功率高于灯具功率3倍)

3年有限整灯品质保证

## Optical Specification 配光曲线

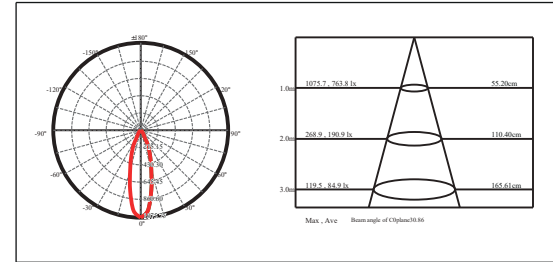

## Optical Accessories 可选配件

### Spike 地插



### IP68 junction box 防水接线盒




### Optional finish 可选颜色



MB  
Matt Black  
氧化雾黑

## SPOT LIGHT 投射灯

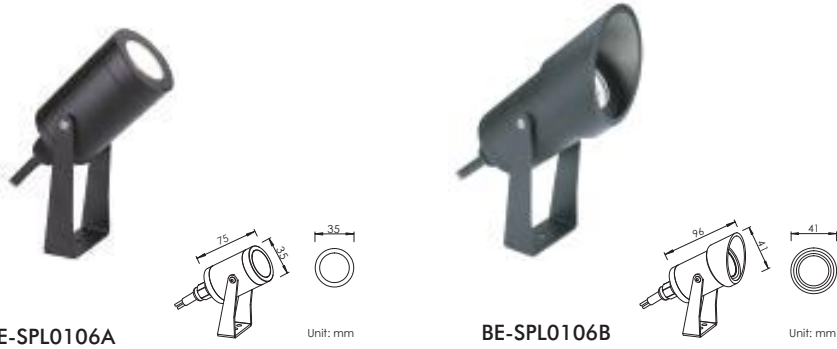

Item number 产品型号	Watts 功率	Input Volt 输入电压	CCT 色温	LED Lumens 光通量	Beam Angle 光束角	Cable length 电线长度
BE-SPL0106A	1W	12/24V	3000K	120lm	21°	2M
BE-SPL0106B	1W	12/24V	3000K	120lm	21°	2M

## Features 产品特点

### Aluminium Spot Light

For outdoor access/spot/wall wash/landscape

LED: 1W

Reduced Glare: Sunken light source

Beam Angle: 10° / 15° / 21° / 36° / 60°

Color Temperature: 2700K / 3000K / 4000K

Finish: Powder Coated Black

IP rated: IP67

Mounting Type: U bracket for solid ground; spike for soft ground

12/24VDC input, built-in DC driver with 2M of power cable

3 year limited guarantee

### 铝制投射灯

适用于户外：走道、庭院、花园区域

LED: 1W

光束角：10° / 15° / 21° / 36° / 60°

色温：2700K / 3000K / 4000K

颜色：喷粉黑

防护等级：IP67


安装方式：U形支架 / 地插

输入电压：12 / 24VDC；内置DC-DC驱动·自带配线长度2米

3年有限整灯品质保证


Patent 专利 #: ZL 2015 2 0276208.6

## Optical Specification 配光曲线

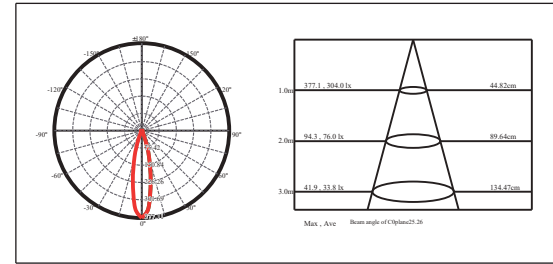

## Optical Accessories 可选配件

### Spike 地插

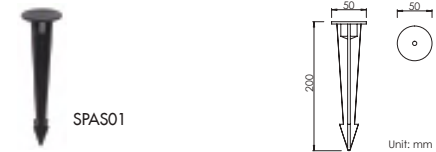


### Anti-glare glass lens 光学配件



### IP68 junction box 防水接线盒



## SPOT LIGHT 投射灯

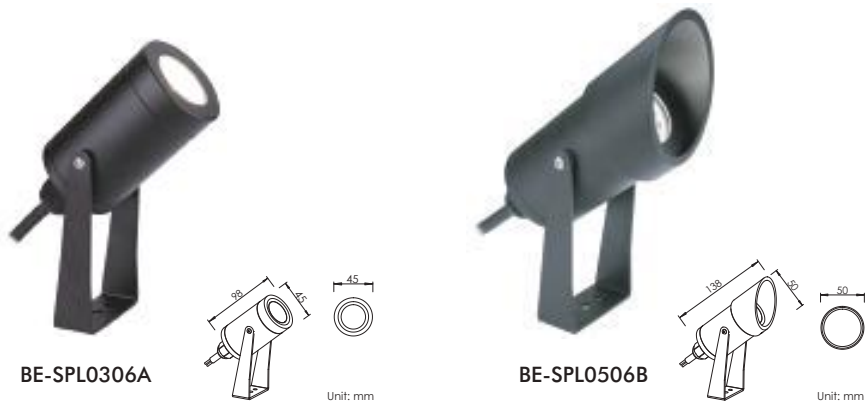

Item number 产品型号	Watts 功率	Input Volt 输入电压	CCT 色温	LED Lumens 光通量	Beam Angle 光束角	Cable length 电线长度
BE-SPL0306A	3W	12/24V	3000K	250lm	20°	2M
BE-SPL0306B	3W	12/24V	3000K	250lm	20°	2M
BE-SPL0506A	5W	12/24V	3000K	550lm	24°	2M
BE-SPL0506B	5W	12/24V	3000K	550lm	24°	2M

## Features 产品特点

**Die Casting Aluminium Spot Light**  
For outdoor access/spot/wall wash/landscape

LED: 3W / 5W  
Reduced Glare: Sunken light source  
Beam Angle: 3W (20° / 40° / 60°); 5W (24° / 40° / 60°)  
Color Temperature: 2700K / 3000K / 4000K  
Finish: Powder Coated Black  
IP rated: IP67  
Mounting Type: U bracket for solid ground; spike for soft ground

12/24VDC input, built-in DC driver with 2M of power cable  
(5W: Input wattage must be 3 times higher than the rated LED wattage to insure LED start-up)

3 year limited guarantee

**铝制投射灯**  
适用于户外：走道、庭院、花园区域


LED: 3W / 5W  
光束角：3W (20° / 40° / 60°); 5W (24° / 40° / 60°)  
色温：2700K / 3000K / 4000K  
颜色：喷粉黑  
防护等级：IP67  
安装方式：U形支架 / 地插

输入电压：12 / 24VDC; 内置DC-DC驱动 · 自带配线长度2米  
(注：因5W内置驱动启动电流要求较高 · 请保证电源功率高于灯具功率4倍)

3年有限整灯品质保证

Patent 专利 #: ZL 2015 2 0276208.6

## Optical Specification 配光曲线

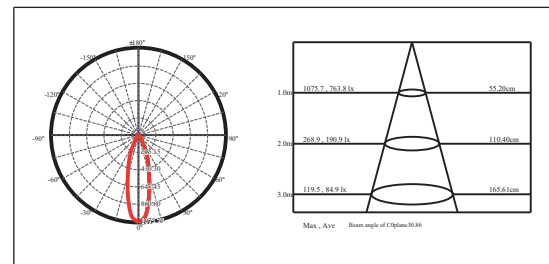

## Optical Accessories 可选配件

### Spike 地插




### Anti-glare glass lens 光学配件



### IP68 junction box 防水接线盒



## SPOT LIGHT 投射灯

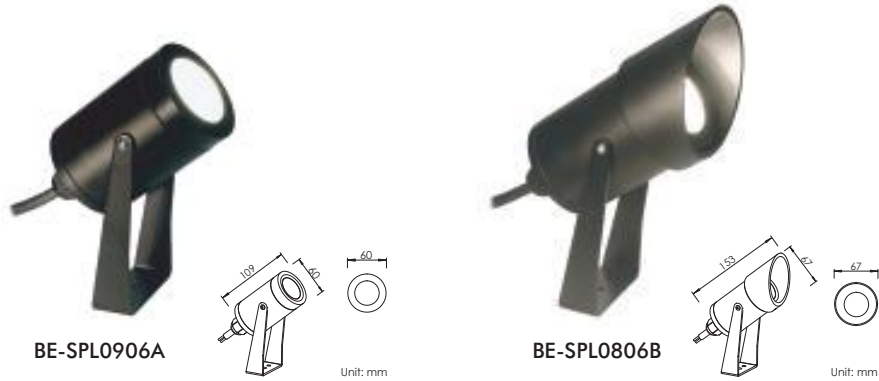

Item number 产品型号	Watts 功率	Input Volt 输入电压	CCT 色温	LED Lumens 光通量	Beam Angle 光束角	Cable length 电线长度
BE-SPL0806A	8W	12/24V	3000K	750lm	25°	2M
BE-SPL0806B	8W	12/24V	3000K	750lm	25°	2M
BE-SPL0906A	9W	12/24V	3000K	1050lm	15°	2M
BE-SPL0906B	9W	12/24V	3000K	1050lm	15°	2M

## Features 产品特点

Die Casting Aluminium Spot Light  
For outdoor access/spot/wall wash/landscape

LED: 8W / 9W  
Reduced Glare: Sunken light source  
Beam Angle: 8W (25° / 40° / 60°); 9W (15° / 25° / 38° / 60°)  
Color Temperature: 2700K / 3000K / 4000K  
Finish: Powder Coated Black  
IP rated: IP67  
Mounting Type: U bracket for solid ground; spike for soft ground

12/24VDC input, built-in DC driver with 2M of power cable  
(9W: Input wattage must be 2 times higher than the rated LED wattage to insure LED start-up)

3 year limited guarantee

铝制投射灯  
适用于户外：走道、庭院、花园区域


LED: 8W / 9W  
光束角：8W (25° / 40° / 60°); 9W (15° / 25° / 38° / 60°)  
色温：2700K / 3000K / 4000K  
颜色：喷粉黑  
防护等级：IP67  
安装方式：U形支架 / 地插

输入电压：12 / 24VDC；内置DC-DC驱动·自带配线长度2米  
(注：因9W内置驱动启动电流要求较高·请保证电源功率高于灯具功率3倍)

3年有限整灯品质保证

Patent 专利 #: ZL 2015 2 0276208.6

## Optical Specification 配光曲线

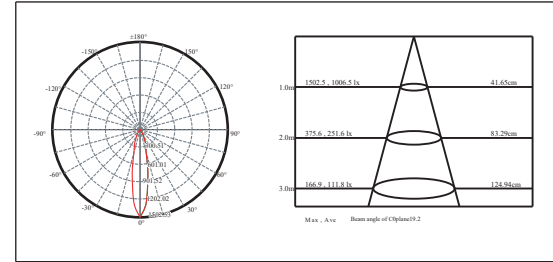

## Optical Accessories 可选配件

### Spike 地插



### Anti-glare glass lens 光学配件




### IP68 junction box 防水接线盒



## SPOT LIGHT 投射灯




BE-SPM0501A  
BE-SPM0701A



Unit: mm



BE-SPM0501B  
BE-SPM0701B



Unit: mm

Item number 产品型号	Watts 功率	Input Volt 输入电压	CCT 色温	LED Lumens 光通量	Beam Angle 光束角	Cable length 电线长度
BE-SPM0501A	5W	220-240VAC	3000K	550lm	15°	2M
BE-SPM0501B	5W	220-240VAC	3000K	550lm	15°	2M
BE-SPM0701A	7W	220-240VAC	3000K	750lm	15°	2M
BE-SPM0701B	7W	220-240VAC	3000K	750lm	15°	2M

## Features 产品特点

Main Voltage Aluminium Spot Light  
For outdoor access/spot/wall wash/landscape

LED: 5W / 7W  
Reduced Glare: Sunken light source  
Beam Angle: 15° / 24° / 36° / 60°  
Color Temperature: 2700K / 3000K / 4000K  
Finish: Matt Black Anodized  
IP rated: IP67  
Mounting Type: U bracket for solid ground; spike for soft ground

220-240VAC input, built-in driver with 2M of power cable

3 year limited guarantee

Patent 专利 #: ZL 2015 2 0276208.6


高压铝制投射灯  
适用于户外：走道、庭院、花园区域

LED: 5W / 7W  
光束角: 15° / 24° / 36° / 60°  
色温: 2700K / 3000K / 4000K  
颜色: 氧化雾黑  
防护等级: IP67  
安装方式: U形支架 / 地插

输入电压: 220-240VAC; 内置驱动 · 自带配线长度2米

3年有限整灯品质保证

## Optical Specification 配光曲线

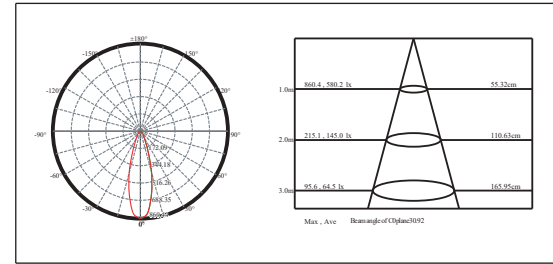


## Optical Accessories 可选配件

### Spike 地插



SPAS01



Unit: mm

### Anti-glare glass lens 光学配件




WUAG05L  
Linear glass lens  
横纹玻璃



WUAG05S  
Soft glass lens  
布纹玻璃



WUAH02  
Honeycomb louver  
蜂巢网片



Unit: mm

### IP68 junction box 防水接线盒



JB2001  
For single fixture installation  
单灯安装




JB3001  
For continuous fixtures installation  
连续安装

## SPOT LIGHT 投射灯




BE-SPM1001A  
BE-SPM1201A  
BE-SPM1501A



Unit: mm



BE-SPM1001B  
BE-SPM1201B  
BE-SPM1501B



Unit: mm

Item number 产品型号	Watts 功率	Input Volt 输入电压	CCT 色温	LED Lumens 光通量	Beam Angle 光束角	Cable length 电线长度
BE-SPM1001A/B	10W	220-240VAC	3000K	1150lm	15°	2M
BE-SPM1201A/B	12W	220-240VAC	3000K	1350lm	15°	2M
BE-SPM1501A/B	15W	220-240VAC	3000K	1650lm	15°	2M

## Features 产品特点

Main Voltage Aluminium Spot Light  
For outdoor access/spot/wall wash/landscape

LED: 10W / 12W / 15W  
Reduced Glare: Sunken light source  
Beam Angle: 15° / 24° / 36° / 50°  
Color Temperature: 2700K / 3000K / 4000K  
Finish: Matt Black Anodized  
IP rated: IP67  
Mounting Type: U bracket for solid ground; spike for soft ground

220-240VAC input, built-in driver with 2M of power cable

3 year limited guarantee

Patent 专利 #: ZL 2015 2 0276208.6


高压铝制投射灯  
适用于户外：走道、庭院、花园区域

LED: 10W / 12W / 15W  
光束角: 15° / 24° / 36° / 50°  
色温: 2700K / 3000K / 4000K  
颜色: 氧化雾黑  
防护等级: IP67  
安装方式: U形支架 / 地插

输入电压: 220-240VAC; 内置驱动 · 自带配线长度2米

3年有限整灯品质保证

## Optical Specification 配光曲线

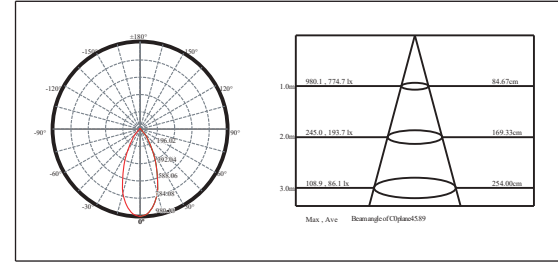


## Optical Accessories 可选配件

### Spike 地插



SPAS01



Unit: mm

### Anti-glare glass lens 光学配件




DLAG01L  
Linear glass lens  
横纹玻璃



DLAG01S  
Soft glass lens  
布纹玻璃



DLAH01  
Honeycomb louver  
蜂巢网片



Unit: mm

### IP68 junction box 防水接线盒



JB2001  
For single fixture installation  
单灯安装



JB3001  
For continuous fixtures installation  
连续安装

## SPOT LIGHT 投射灯



BE-SPM1801A  
BE-SPM2001A  
BE-SPM2501A

BE-SPM1801B  
BE-SPM2001B  
BE-SPM2501B

Item number 产品型号	Watts 功率	Input Volt 输入电压	CCT 色温	LED Lumens 光通量	Beam Angle 光束角	Cable length 电线长度
BE-SPM1801A/B	18W	220-240VAC	3000K	2000lm	15°	2M
BE-SPM2001A/B	20W	220-240VAC	3000K	2250lm	15°	2M
BE-SPM2501A/B	25W	220-240VAC	3000K	2750lm	15°	2M

## Features 产品特点

Main Voltage Aluminium Spot Light  
For outdoor access/spot/wall wash/landscape


LED: 18W / 20W / 25W  
Reduced Glare: Sunken light source  
Beam Angle: 15° / 24° / 36° / 60°  
Color Temperature: 2700K / 3000K / 4000K  
Finish: Matt Black Anodized  
IP rated: IP67  
Mounting Type: U bracket for solid ground; spike for soft ground  
220-240VAC input, built-in driver with 2M of power cable  
3 year limited guarantee

高压铝制投射灯  
适用于户外：走道、庭院、花园区域

LED: 18W / 20W / 25W  
光束角：15° / 24° / 36° / 60°  
色温：2700K / 3000K / 4000K  
颜色：氧化雾黑  
防护等级：IP67  
安装方式：U形支架 / 地插  
输入电压：220-240VAC；内置驱动·自带配线长度2米  
3年有限整灯品质保证

Patent 专利 #: ZL 2015 2 0276208.6

## Optical Specification 配光曲线

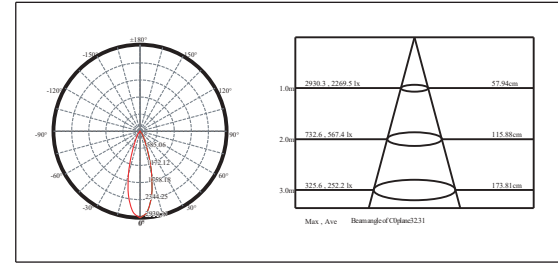

## Optical Accessories 可选配件

### Spike 地插



### Anti-glare glass lens 光学配件



### IP68 junction box 防水接线盒





## WALL MOUNTING 墙壁安装件



SPAW01



SPAW02



SPAW03

Item number 产品型号	Material 材料	Diameter 外径	Height 高度	Thread 螺牙规格	Application Watts 适配功率
SPAW01	Aluminium 铝	D60mm	15mm	M5	1W
SPAW02	Aluminium 铝	D60mm	15mm	M5	3W / 5W
SPAW03	Aluminium 铝	D60mm	15mm	M5	8W / 9W

### Optional finish 可选颜色



BK  
Powder Coated Black  
喷粉黑



MS  
Matt Silver  
氧化雾银

### Application 产品应用



SPL0102B & SPAW01

## TREE MOUNTING 树干安装件



SPAT01 / SPAT02 / SPAT03

Item number 产品型号	Material 材料	Diameter 外径	Height 高度	Belt Size 绑带长度	Application Watts 适配功率
SPAT01	Aluminium 铝	D60mm	15mm	M5	1W
SPAT02	Aluminium 铝	D60mm	15mm	M5	3W / 5W
SPAT03	Aluminium 铝	D60mm	15mm	M5	8W / 9W

### Optional finish 可选颜色



BK  
Powder Coated Black  
喷粉黑



MS  
Matt Silver  
氧化雾银

### Application 产品应用



SPL0902B & SPAT03



Step light

STEP  
LIGHT



阶 梯 灯




## STEP LIGHT 阶梯灯



Item number 产品型号	Watts 功率	Input Current 输入电流	CCT 色温	LED Lumens 光通量	Cable Length 电线长度	Cut out 开孔尺寸	Recess 安装深度
BE-STL0111A	1W	350mA	3000K	120lm	1m	D40	40
BE-STL0111B	1W	350mA	3000K	120lm	1m	D40	40

Unit: mm

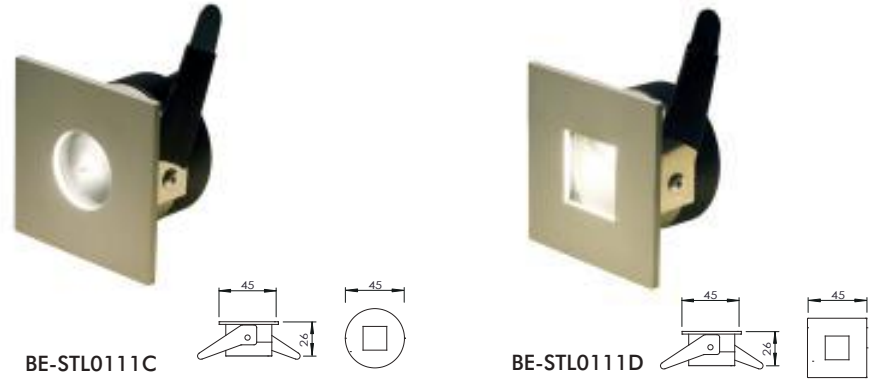

Item number 产品型号	Watts 功率	Input Current 输入电流	CCT 色温	LED Lumens 光通量	Cable Length 电线长度	Cut out 开孔尺寸	Recess 安装深度
BE-STL0111C	1W	350mA	3000K	120lm	1m	D40	40
BE-STL0111D	1W	350mA	3000K	120lm	1m	D40	40

Unit: mm

### Features 产品特点

#### Aluminium Step Light

For outdoor step / decking / marker

LED: 1W  
Beam Angle: Asymmetric  
Color Temperature: 2700K / 3000K / 4000K  
Finish: Matt Silver Anodized  
IP rated: IP67  
Cut out: D40

Input current: 350mA, 3-4V DC with 1M of power cable  
(The waterproof cable connector - WCC001 - is recommended for making connections)

3 year limited guarantee

Patent 专利 #: ZL 2015 2 0276208.6

#### 铝制阶梯灯

适用于户外：楼梯、走道、台阶等区域

LED: 1W  
光束角：偏光  
色温：2700K / 3000K / 4000K  
颜色：氧化雾银  
防护等级：IP67  
开孔尺寸：D40

输入电流：350mA, 3-4V DC; 自带配线长度1米  
(注：灯具安装时，推荐使用防水接线器WCC001)

3年有限整灯品质保证

### Features 产品特点

#### Aluminium Step Light

For outdoor step / decking / marker

LED: 1W  
Beam Angle: Asymmetric  
Color Temperature: 2700K / 3000K / 4000K  
Finish: Matt Silver Anodized  
IP rated: IP67  
Cut out: D40

Input current: 350mA, 3-4V DC with 1M of power cable  
(The waterproof cable connector - WCC001 - is recommended for making connections)

3 year limited guarantee

Patent 专利 #: ZL 2015 2 0276208.6

#### 铝制阶梯灯

适用于户外：楼梯、走道、台阶等区域

LED: 1W  
光束角：偏光  
色温：2700K / 3000K / 4000K  
颜色：氧化雾银  
防护等级：IP67  
开孔尺寸：D40


输入电流：350mA, 3-4V DC; 自带配线长度1米  
(注：灯具安装时，推荐使用防水接线器WCC001)

3年有限整灯品质保证

## STEP LIGHT 阶梯灯




BE-STL0312A



Unit: mm



BE-STL0312B



Unit: mm

Item number 产品型号	Watts 功率	Input Volt 输入电压	CCT 色温	LED Lumens 光通量	Cable Length 电线长度	Cut out 开孔尺寸	Recess 安装深度
BE-STL0312A	2W	12/24V	3000K	200lm	1m	D52	70
BE-STL0312B	2W	12/24V	3000K	200lm	1m	D52	70

## Features 产品特点

### Aluminium Step Light

For outdoor step / decking / marker

LED: 2W  
Beam Angle: Asymmetric  
Color Temperature: 2700K / 3000K / 4000K  
Finish: Matt Silver Anodized  
IP rated: IP65  
Cut out: D52 (for deck mounting)

12/24VDC input, built-in DC driver with 1M of power cable

3 year limited guarantee

### 铝制阶梯灯

适用于户外：楼梯、走道、台阶等区域

LED: 2W  
光束角：偏光  
色温：2700K / 3000K / 4000K  
颜色：氧化雾银  
防护等级：IP65  
开孔尺寸：D52 (嵌入安装)

输入电压：12 / 24VDC；内置DC-DC驱动，自带配线长度1米

3年有限整灯品质保证


Patent 专利 #: ZL 2015 2 0276208.6

## Optical Accessories 可选配件

### Mounting sleeve 预埋件



WUAS01  
Cut out size: D60mm  
开孔尺寸: D60mm



Unit: mm

### IP68 junction box 防水接线盒



JB2001  
For single fixture installation  
单灯安装



JB3001  
For continuous fixtures installation  
连续安装

### Optional finish 可选颜色




MB  
Matt Black  
氧化雾黑

## STEP LIGHT 阶梯灯




BE-STL0101A



Unit: mm



BE-STL0101B



Unit: mm

Item number 产品型号	Watts 功率	Input Volt 输入电压	CCT 色温	LED Lumens 光通量	Beam Angle 光束角	Cut out 开孔尺寸	Recess 安装深度
BE-STL0101A	1W	12/24V	3000K	120lm	21°	D40	55
BE-STL0101B	1W	12/24V	3000K	120lm	21°	D40	55

## Features 产品特点

### Aluminium Step Light

For outdoor step / decking / marker

LED: 1W  
Beam Angle: 21° / 36°  
Color Temperature: 2700K / 3000K / 4000K  
Finish: Matt Silver Anodized  
IP rated: IP65  
Cut out: D40 (for deck mounting)

12/24VDC input, built-in DC driver with 1M of power cable

3 year limited guarantee

Patent 专利 #: ZL 2015 2 0276208.6

### 铝制阶梯灯

适用于户外：楼梯、走道、台阶等区域

LED: 1W  
光束角：21° / 36°  
色温：2700K / 3000K / 4000K  
颜色：氧化雾银  
防护等级：IP65  
开孔尺寸：D40 (嵌入安装)

输入电压：12 / 24VDC；内置DC-DC驱动·自带配线长度1米


3年有限整灯品质保证

## Optical Accessories 可选配件

### Mounting sleeve 预埋件



STAS01  
Cut out size: D41mm  
开孔尺寸: D41mm



Unit: mm


### Anti-glare glass lens 光学配件



STAG01F  
Frosted glass lens  
喷砂玻璃



STAG01W  
Silk-screen glass lens  
丝印玻璃



Unit: mm

### IP68 junction box 防水接线盒



JB1001  
For single fixture installation  
单灯安装

### Optional style 可选款式



BE-STL0101C



BE-STL0101E



BE-STL0101X



BE-STL0101D



BE-STL0101F

### Optional finish 可选颜色




MB  
Matt Black  
氧化雾黑

## STEP LIGHT 阶梯灯




BE-STL0102A



Unit: mm




BE-STL0102B



Unit: mm




BE-STL0101C



Unit: mm



BE-STL0102D



Unit: mm

Item number 产品型号	Watts 功率	Input Current 输入电流	CCT 色温	LED Lumens 光通量	Beam Angle 光束角	Cut out 开孔尺寸	Recess 安装深度
BE-STL0102A	1W	350mA	3000K	120lm	25°	D16	35
BE-STL0102B	1W	350mA	3000K	120lm	25°	D16	35

Item number 产品型号	Watts 功率	Input Current 输入电流	CCT 色温	LED Lumens 光通量	Beam Angle 光束角	Cut out 开孔尺寸	Recess 安装深度
BE-STL0102C	1W	350mA	3000K	120lm	25°	D20	35
BE-STL0102D	1W	350mA	3000K	120lm	25°	D20	35

### Features 产品特点

#### Aluminium Step Light

For outdoor step / decking / marker

LED: 1W

Beam Angle: 25° / 45° / 60°

Color Temperature: 2700K / 3000K / 4000K

Finish: Matt Silver Anodized

IP rated: IP67

Cut out: D16

Input current: 350mA, 3-4V DC with 1M of power cable  
(The waterproof cable connector - WCC001 - is recommended for making connections)

3 year limited guarantee

#### 铝制阶梯灯

适用于户外：楼梯、走道、台阶等区域

LED: 1W

光束角：25° / 45° / 60°

色温：2700K / 3000K / 4000K

颜色：氧化雾银

防护等级：IP67

开孔尺寸：D16

输入电流：350mA, 3-4V DC; 自带配线长度1米  
(注：灯具安装时，推荐使用防水接线器WCC001)

3年有限整灯品质保证

Patent 专利 #: ZL 2015 2 0276208.6

### Features 产品特点

#### Aluminium Step Light

For outdoor step / decking / marker

LED: 1W

Beam Angle: 25° / 45° / 60°

Color Temperature: 2700K / 3000K / 4000K

Finish: Matt Silver Anodized

IP rated: IP67

Cut out: D20

Input current: 350mA, 3-4V DC with 1M of power cable  
(The waterproof cable connector - WCC001 - is recommended for making connections)

3 year limited guarantee

Patent 专利 #: ZL 2015 2 0276208.6

#### 铝制阶梯灯

适用于户外：楼梯、走道、台阶等区域

LED: 1W

光束角：25° / 45° / 60°

色温：2700K / 3000K / 4000K

颜色：氧化雾银

防护等级：IP67

开孔尺寸：D20

输入电流：350mA, 3-4V DC; 自带配线长度1米  
(注：灯具安装时，推荐使用防水接线器WCC001)

3年有限整灯品质保证

## STEP LIGHT 阶梯灯



BE-STL0103A



BE-STL0103B

Item number 产品型号	Watts 功率	Input Volt 输入电压	CCT 色温	LED Lumens 光通量	Beam Angle 光束角	Cut out 开孔尺寸	Recess 安装深度
BE-STL0103A	0.5W	12/24V	3000K	75lm	40°	D35	55
BE-STL0103B	0.5W	12/24V	3000K	75lm	40°	D35	55

## Features 产品特点

### Aluminium Step Light

For outdoor step / decking / marker

LED: 0.5W  
Beam Angle: 40°  
Color Temperature: 2700K / 3000K / 4000K  
Finish: Matt Silver Anodized  
IP rated: IP65  
Cut out: D35 (for deck mounting)

12/24VDC input, built-in DC driver with 1M of power cable

3 year limited guarantee

Patent 专利 #: ZL 2015 2 0276208.6

### 铝制阶梯灯

适用于户外：楼梯、走道、台阶等区域

LED: 0.5W  
光束角: 40°  
色温: 2700K / 3000K / 4000K  
颜色: 氧化雾银  
防护等级: IP65  
开孔尺寸: D35 (嵌入安装)

输入电压: 12 / 24VDC; 内置DC-DC驱动·自带配线长度1米


3年有限整灯品质保证

## Optical Accessories 可选配件

### Mounting sleeve 预埋件



STAS02  
Cut out size: D40mm  
开孔尺寸: D40mm



Unit: mm


### Anti-glare glass lens 光学配件



STAG01F  
Frosted glass lens  
喷砂玻璃



STAG01W  
Silk-screen glass lens  
丝印玻璃



Unit: mm

### IP68 junction box 防水接线盒



JB1001  
For single fixture installation  
单灯安装

### Optional style 可选款式



BE-STL0103C



BE-STL0103E



BE-STL0103X



BE-STL0103D




BE-STL0103F

### Optional finish 可选颜色



MB  
Matt Black  
氧化雾黑

## STEP LIGHT 阶梯灯

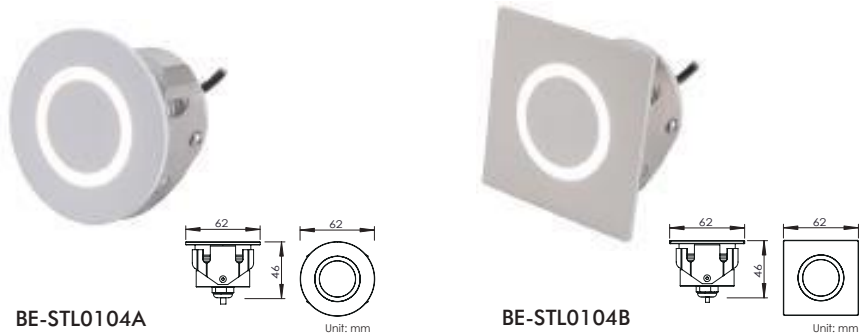

Item number 产品型号	Watts 功率	Input Volt 输入电压	CCT 色温	LED Lumens 光通量	Cable Length 电线长度	Cut out 开孔尺寸	Recess 安装深度
BE-STL0104A	1W	24VDC	3000K	150lm	1m	D51	50
BE-STL0104B	1W	24VDC	3000K	150lm	1m	D51	50
BE-STL0204A	2W	24VDC	3000K	280lm	1m	D51	50
BE-STL0204B	2W	24VDC	3000K	280lm	1m	D51	50

## Features 产品特点

Aluminium Dimmable Step Light  
For outdoor step / decking / marker

LED: 1W / 2W  
Color Temperature: 2700K / 3000K / 4000K  
Finish: Matt Silver Anodized  
IP rated: IP65  
Cut out: D55 (for deck mounting)

24VDC input, with 1M of power cable  
Dimmable support: 1-10V

3 year limited guarantee

铝制调光阶梯灯  
适用于户外：楼梯、走道、台阶等区域

LED: 1W / 2W  
色温：2700K / 3000K / 4000K  
颜色：氧化雾银  
防护等级：IP65  
开孔尺寸：D55 (嵌入安装)

输入电压：24VDC；自带配线长度1米  
光调方式：1-10V

3年有限整灯品质保证


Patent 专利 #: ZL 2015 2 0276208.6

## Optical Accessories 可选配件

### Mounting sleeve 预埋件



WUAS01  
Cut out size: D60mm  
开孔尺寸: D60mm



Unit: mm

### IP68 junction box 防水接线盒



JB1001  
For single fixture installation  
单灯安装

### Optional finish 可选颜色




WH  
Powder Coated White  
喷粉白




MB  
Matt Black  
氧化雾黑



## STEP LIGHT 阶梯灯



BE-STL0105A



BE-STL0105B

Item number 产品型号	Watts 功率	Input Volt 输入电压	CCT 色温	LED Lumens 光通量	Cable Length 电线长度	Cut out 开孔尺寸	Recess 安装深度
BE-STL0105A	1W	24VDC	3000K	100lm	1m	D40	50
BE-STL0105B	1W	24VDC	3000K	100lm	1m	D40	50

## Features 产品特点

Aluminium Dimmable Step Light  
For outdoor step / decking / marker

LED: 1W  
Color Temperature: 2700K / 3000K / 4000K  
Finish: Matt Silver Anodized  
IP rated: IP65  
Cut out: D40 (for deck mounting)

24VDC input, with 1M of power cable  
Dimmable support: 1-10V

3 year limited guarantee

铝制调光阶梯灯  
适用于户外：楼梯、走道、台阶等区域

LED: 1W  
色温：2700K / 3000K / 4000K  
颜色：氧化雾银  
防护等级：IP65  
开孔尺寸：D40 (嵌入安装)

输入电压：24VDC；自带配线长度1米  
光调方式：1-10V

3年有限整灯品质保证


Patent 专利 #: ZL 2015 2 0276208.6

## Optical Accessories 可选配件

### Mounting sleeve 预埋件



STAS01  
Cut out size: D41mm  
开孔尺寸: D41mm



Unit: mm

### IP68 junction box 防水接线盒



JB1001  
For single fixture installation  
单灯安装

### Optional finish 可选颜色



WH  
Powder Coated White  
喷粉白




MB  
Matt Black  
氧化雾黑

## STEP LIGHT 阶梯灯




BE-STL0301A



Unit: mm



BE-STL0501B



Unit: mm

Item number 产品型号	Watts 功率	Input Volt 输入电压	CCT 色温	LED Lumens 光通量	Cable Length 电线长度	Cut out 开孔尺寸	Recess 安装深度
BE-STL0301A	3W	12/24V	3000K	250lm	1m	D51	100
BE-STL0301B	3W	12/24V	3000K	250lm	1m	D51	100
BE-STL0501A	5W	12/24V	3000K	550lm	1m	D51	100
BE-STL0501B	5W	12/24V	3000K	550lm	1m	D51	100

## Features 产品特点

### Aluminium Step Light

For outdoor step / decking / marker

LED: 3W / 5W  
Color Temperature: 2700K / 3000K / 4000K  
Finish: Matt Silver Anodized  
IP rated: IP67  
Cut out: D51 (for deck mounting)

12/24VDC input, built-in DC driver with 2M of power cable  
(5W: Input wattage must be 3 times higher than the rated LED wattage to insure LED start-up)

3 year limited guarantee

### 铝制阶梯灯

适用于户外：楼梯、走道、台阶等区域

LED: 3W / 5W  
色温：2700K / 3000K / 4000K  
颜色：氧化雾银  
防护等级：IP67  
开孔尺寸：D51 (嵌入安装)

输入电压：12 / 24VDC；内置DC-DC驱动，自带配线长度2米  
(注：因5W内置驱动启动电流要求较高，请保证电源功率高于灯具功率4倍)

3年有限整灯品质保证


Patent 专利 #: ZL 2015 2 0276208.6

## Optical Accessories 可选配件

### Mounting sleeve 预埋件



WUAS01  
Cut out size: D60mm  
开孔尺寸: D60mm



Unit: mm


### Anti-glare glass lens 光学配件



WUAG01F  
Frosted glass lens  
磨砂玻璃



WUAG01W  
Silk-screen glass lens  
丝印玻璃



Unit: mm

### IP68 junction box 防水接线盒



JB2001  
For single fixture installation  
单灯安装



JB3001  
For continuous fixtures installation  
连续安装

### Optional style 可选款式



BE-STL0301C/0501C



BE-STL0301E/0501E



BE-STL0301D/0501D



BE-STL0301F/0501F




### Optional finish 可选颜色



MB  
Matt Black  
氧化雾黑

## STEP LIGHT 阶梯灯

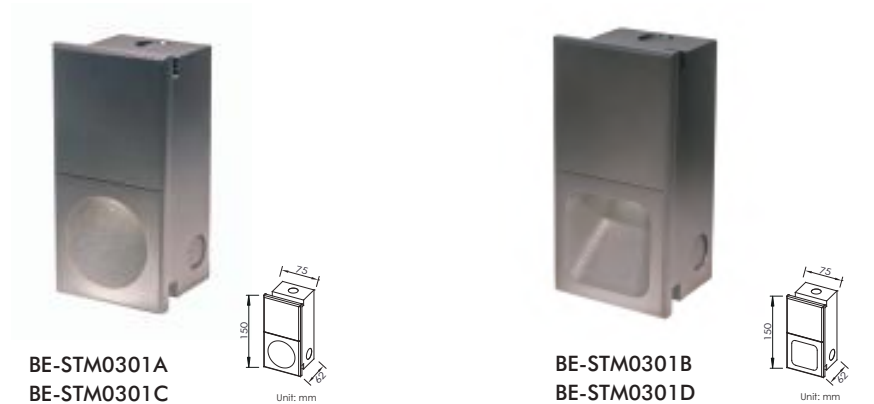

BE-STM0301A  
BE-STM0301C

BE-STM0301B  
BE-STM0301D

Item number 产品型号	Watts 功率	Input Current 输入电压	CCT 色温	LED Lumens 光通量	IP Rate 防护等级	Cut out 开孔尺寸	Recess 安装深度
BE-STM0301A/B	3W	220-240VAC	3000K	250lm	IP55	64x122	60
BE-STM0301C/D	3W	220-240VAC	3000K	250lm	IP20	64x122	60

### Features 产品特点

#### Main Voltage Aluminium Step Light For outdoor step / decking / marker

LED: 3W  
Beam Angle: Asymmetric  
Color Temperature: 2700K / 3000K / 4000K  
Finish: Powder Coated Black  
IP rated: STM0301A / B (IP55)  
STM0301C / D (IP20, with PIR)  
Cut out: 64x122x60  
65x144x60 (with mounting sleeve)

220-240VAC input, built-in driver with 0.2M of power cable


3 year limited guarantee

#### 高压铝制阶梯灯 适用于户外：楼梯、走道、台阶等区域

LED: 3W  
光束角：偏光  
色温：2700K / 3000K / 4000K  
颜色：喷粉黑  
防护等级：STM0301A / B (IP55);  
STM0301C / D (IP20, 带红外感应)  
开孔尺寸：64x122x60  
65x144x60 (带预埋件)

输入电压：220-240VAC; 内置驱动·自带配线  
长度0.2米

3年有限整灯品质保证

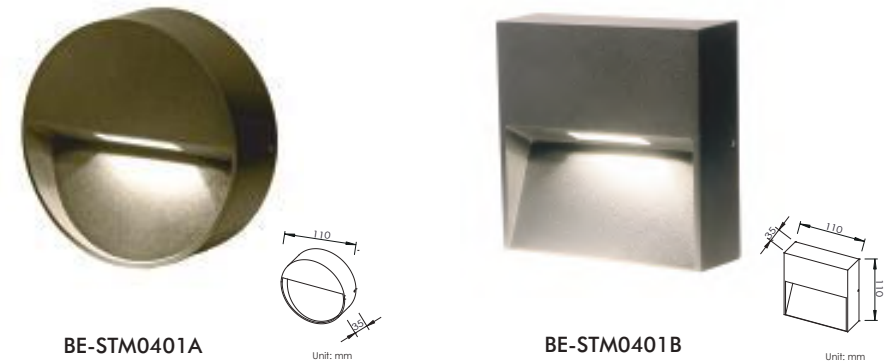

BE-STM0401A

BE-STM0401B

Item number 产品型号	Watts 功率	Input Volt 输入电压	CCT 色温	LED Lumens 光通量	IP Rate 防护等级
BE-STM0401A	4W	220-240VAC	3000K	450lm	IP55
BE-STM0401B	4W	220-240VAC	3000K	450lm	IP55

### Features 产品特点

#### Main Voltage Aluminium Step Light For outdoor step / decking / marker

LED: 4W  
Beam Angle: Asymmetric  
Color Temperature: 2700K / 3000K / 4000K  
Finish: Powder Coated Black  
IP rated: IP55  
Mounting Type: Surface mounting

220-240VAC input, built-in driver

3 year limited guarantee

#### 高压铝制阶梯灯 适用于户外：楼梯、走道、台阶等区域

LED: 4W  
光束角：偏光  
色温：2700K / 3000K / 4000K  
颜色：喷粉黑  
防护等级：IP55  
安装方式：表面安装

输入电压：220-240VAC; 内置驱动

3年有限整灯品质保证

Path light



PATH  
LIGHT


IV

庭院灯


## PATH LIGHT 庭院灯



BE-PAL0301A



BE-PAL0501B



Unit: mm

Item number 产品型号	Watts 功率	Input Volt 输入电压	CCT 色温	LED Lumens 光通量	Cable Length 电线长度	Cut out 开孔尺寸	Recess 安装深度
BE-PAL0301A	3W	12/24V	3000K	250lm	2m	D51	100
BE-PAL0301B	3W	12/24V	3000K	250lm	2m	D51	100
BE-PAL0501A	5W	12/24V	3000K	550lm	2m	D51	100
BE-PAL0501B	5W	12/24V	3000K	550lm	2m	D51	100

## Features 产品特点

### Aluminium Path Light

For outdoor path / decking / marker

LED: 5W / 3W  
Color Temperature: 2700K / 3000K / 4000K  
Finish: Matt Silver Anodized  
IP rated: IP67  
Cut out: D51 (for deck mounting)

12/24VDC input, built-in DC driver with 2M of power cable  
(5W: Input wattage must be 3 times higher than the rated LED wattage to insure LED start-up)

3 year limited guarantee

### 铝制庭院灯

适用于户外：庭院、花园等区域

LED: 5W / 3W  
色温：2700K / 3000K / 4000K  
颜色：氧化雾银  
防护等级：IP67  
开孔尺寸：D51 (嵌入安装)

输入电压：12 / 24VDC；内置DC-DC驱动，自带配线长度2米  
(注：因5W内置驱动启动电流要求较高，请保证电源功率高于灯具功率4倍)

3年有限整灯品质保证


Patent 专利 #: ZL 2015 2 0276208.6 / ZL 2015 3 0124808.6

## Optical Accessories 可选配件

### Mounting sleeve 预埋件



WUAS01  
Cut out size: D60mm  
开孔尺寸: D60mm



Unit: mm


### Anti-glare glass lens 光学配件



WUAG01F  
Frosted glass lens  
磨砂玻璃



WUAG01W  
Silk-screen glass lens  
丝印玻璃



Unit: mm

### IP68 junction box 防水接线盒



JB2001  
For single fixture installation  
单灯安装



JB3001  
For continuous fixtures installation  
连续安装


### Optional style 可选款式



BE-PAL0301C/0501C



BE-PAL0301D/0501D



BE-PAL0301E/0501E



### Optional finish 可选颜色




MB  
Matt Black  
氧化雾黑

## PATH LIGHT 庭院灯



BE-PAL0801A



BE-PAL0901B



Unit: mm

Item number 产品型号	Watts 功率	Input Volt 输入电压	CCT 色温	LED Lumens 光通量	Cable Length 电线长度	Cut out 开孔尺寸	Recess 安装深度
BE-PAL0801A	8W	12/24V	3000K	750lm	2m	D65	115
BE-PAL0801B	8W	12/24V	3000K	750lm	2m	D65	115
BE-PAL0901A	9W	12/24V	3000K	1050lm	2m	D65	115
BE-PAL0901B	9W	12/24V	3000K	1050lm	2m	D65	115

## Features 产品特点

### Aluminium Path Light

For outdoor path / decking / marker

LED: 9W / 8W  
Color Temperature: 2700K / 3000K / 4000K  
Finish: Matt Silver Anodized  
IP rated: IP67  
Cut out: D65 (for deck mounting)

12/24VDC input, built-in DC driver with 2M of power cable  
(9W: Input wattage must be 2 times higher than the rated LED wattage to insure LED start-up)

3 year limited guarantee

### 铝制庭院灯

适用于户外：庭院、花园等区域

LED: 9W / 8W  
色温：2700K / 3000K / 4000K  
颜色：氧化雾银  
防护等级：IP67  
开孔尺寸：D65 (嵌入安装)

输入电压：12 / 24VDC；内置DC-DC驱动·自带配线长度2米  
(注：因9W内置驱动启动电流要求较高·请保证电源功率高于灯具功率3倍)

3年有限整灯品质保证


Patent 专利 #: ZL 2015 2 0276208.6 / ZL 2015 3 0124808.6

## Optical Accessories 可选配件

### Mounting sleeve 预埋件



WUAS02  
Cut out size: D71mm  
开孔尺寸: D71mm



Unit: mm


### Anti-glare glass lens 光学配件



WUAG02F  
Frosted glass lens  
喷砂玻璃



WUAG02W  
Silk-screen glass lens  
丝印玻璃



Unit: mm

### IP68 junction box 防水接线盒



JB2001  
For single fixture installation  
单灯安装



JB3001  
For continuous fixtures installation  
连续安装


### Optional style 可选款式



BE-PAL0801C/0901C



BE-PAL0801D/0901D



BE-PAL0801E/0901E




### Optional finish 可选颜色



MB  
Matt Black  
氧化雾黑

## PATH LIGHT 庭院灯

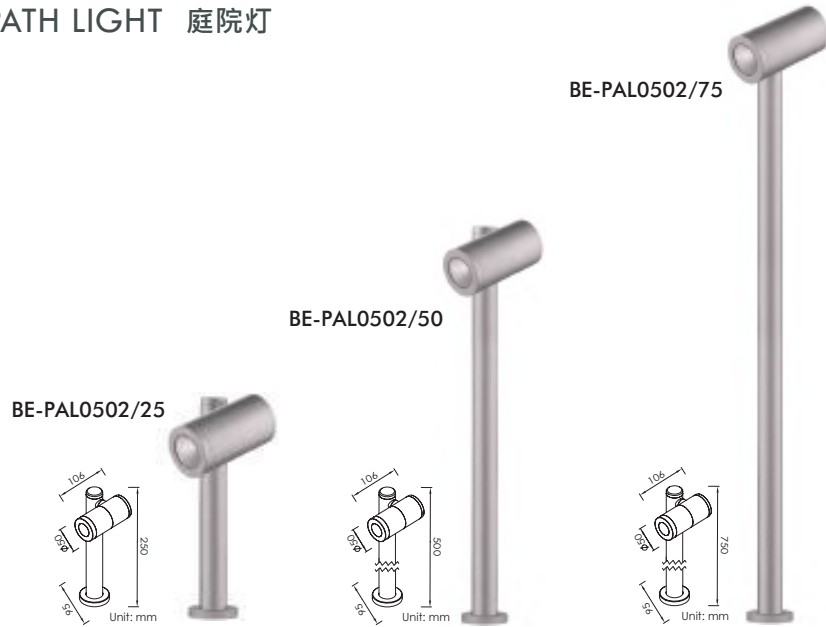

Item number 产品型号	Watts 功率	Input Volt 输入电压	CCT 色温	LED Lumens 光通量	Beam Angle 光束角	Diameter 直径	Stem Length 灯杆长度
BE-PAL0502/25	5W	12/24V	3000K	550lm	24°	D50	250
BE-PAL0502/50	5W	12/24V	3000K	550lm	24°	D50	500
BE-PAL0502/75	5W	12/24V	3000K	550lm	24°	D50	750

## Features 产品特点

### Aluminium Path Light

For outdoor / path / access / spot / landscape

LED: 5W  
Beam Angle: 24° / 40° / 60°  
Color Temperature: 2700K / 3000K / 4000K  
Finish: Matt Silver Anodized  
IP rated: IP65

12/24VDC input, built-in IP68 junction box for wire connecting (Input wattage must be 3 times higher than the rated LED wattage to insure LED start-up)

3 year limited guarantee

### 铝制庭院灯

适用于户外：庭院、花园等区域


LED: 5W  
光束角：24° / 40° / 60°  
色温：2700K / 3000K / 4000K  
颜色：氧化雾银  
防护等级：IP65

输入电压：12 / 24VDC；内置IP68防水接线盒  
(注：因内置驱动启动电流要求较高，请保证电源功率高于灯具功率4倍)

3年有限整灯品质保证

Patent 专利 #: ZL 2015 2 0280930.7 / ZL 2015 3 0124478.0

## Optical Specification 配光曲线

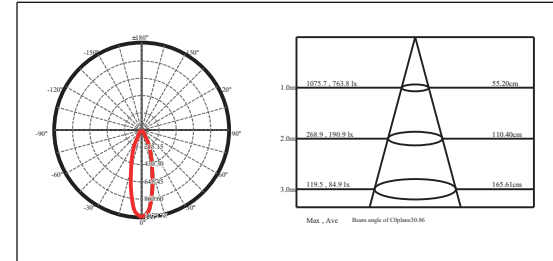


## Optical Accessories 可选配件

### Spike 地插



PAAS01



Unit: mm


### Anti-glare glass lens 光学配件



WUAG01F  
Frosted glass lens  
喷砂玻璃



WUAG01W  
Silk-screen glass lens  
丝印玻璃



Unit: mm

### Optional finish 可选颜色



MB  
Matt Black  
氧化雾黑

PATH LIGHT 庭院灯



Item number 产品型号	Watts 功率	Input Volt 输入电压	CCT 色温	LED Lumens 光通量	Beam Angle 光束角	Diameter 直径	Stem Length 灯杆长度
BE-PAL0902/25	9W	12/24V	3000K	1050lm	20°	D60	250
BE-PAL0902/50	9W	12/24V	3000K	1050lm	20°	D60	500
BE-PAL0902/75	9W	12/24V	3000K	1050lm	20°	D60	750

Features 产品特点

Aluminium Path Light

For outdoor / path / access / spot / landscape

LED: 9W  
Beam Angle: 20° / 30° / 38°  
Color Temperature: 2700K / 3000K / 4000K  
Finish: Matt Silver Anodized  
IP rated: IP65

12/24VDC input, built-in IP68 junction box for wire connecting (Input wattage must be 2 times higher than the rated LED wattage to insure LED start-up)

3 year limited guarantee

铝制庭院灯

适用于户外：广场、走道、庭院、花园区域


LED: 9W  
光束角：20° / 30° / 38°  
色温：2700K / 3000K / 4000K  
颜色：氧化雾银  
防护等级：IP65

输入电压：12 / 24VDC；内置IP68防水接线盒  
(注：因内置驱动启动电流要求较高，请保证电源功率高于灯具功率3倍)

3年有限整灯品质保证

Patent 专利 #: ZL 2015 2 0280930.7 / ZL 2015 3 0124478.0

Optical Specification 配光曲线

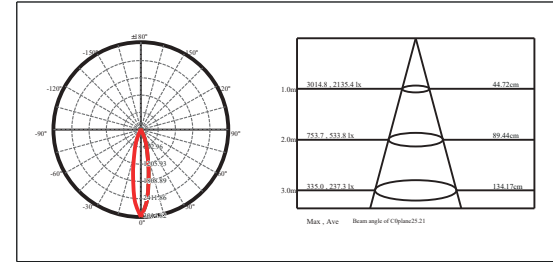


Optical Accessories 可选配件

Spike 地插



PAAS01



Unit: mm


Anti-glare glass lens 光学配件



WUAG02F  
Frosted glass lens  
喷砂玻璃



WUAG02W  
Silk-screen glass lens  
丝印玻璃



Unit: mm


Optional finish 可选颜色




MB  
Matt Black  
氧化雾黑




## PATH LIGHT 庭院灯



Unit: mm  
BE-PAL0902D/75



Unit: mm  
BE-PAL0902D/100



Unit: mm  
BE-PAL0902D/150



Item number 产品型号	Watts 功率	Input Volt 输入电压	CCT 色温	LED Lumens 光通量	Beam Angle 光束角	Diameter 直径	Stem Length 灯杆长度
BE-PAL0902D/75	2x9W	12/24V	3000K	2x1050lm	20°	D60	750
BE-PAL0902D/100	2x9W	12/24V	3000K	2x1050lm	20°	D60	1000
BE-PAL0902D/150	2x9W	12/24V	3000K	2x1050lm	20°	D60	1500

## Features 产品特点

### Aluminium Path Light

For outdoor / path / access / spot / landscape

LED: 2x9W

Beam Angle: 20° / 30° / 38°

Color Temperature: 2700K / 3000K / 4000K

Finish: Matt Silver Anodized

IP rated: IP65

12/24VDC input, built-in IP68 junction box for wire connecting (Input wattage must be 2 times higher than the rated LED wattage to insure LED start-up)

3 year limited guarantee

### 铝制庭院灯

适用于户外：庭院、花园等区域

LED: 2x9W

光束角：20° / 30° / 60°

色温：2700K / 3000K / 4000K

颜色：氧化雾银


防护等级：IP65

输入电压：12 / 24VDC；内置IP68防水接线盒  
(注：因内置驱动启动电流要求较高，请保证电源功率高于灯具功率3倍)

3年有限整灯品质保证

Patent 专利 #: ZL 2015 2 0280930.7 / ZL 2015 3 0124478.0

## Optical Specification 配光曲线

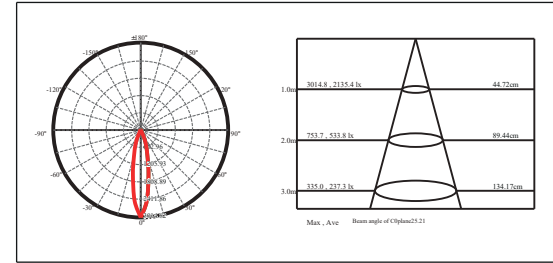


## Optical Accessories 可选配件

### Spike 地插



PAAS02



Unit: mm


### Anti-glare glass lens 光学配件



WUAG02F  
Frosted glass lens  
喷砂玻璃



WUAG02W  
Silk-screen glass lens  
丝印玻璃



Unit: mm

### Optional finish 可选颜色



MB  
Matt Black  
氧化雾黑

## PATH LIGHT 庭院灯



Item number 产品型号	Watts 功率	Input Volt 输入电压	CCT 色温	LED Lumens 光通量	Beam Angle 光束角	Diameter 直径	Stem Length 灯杆长度
BE-PAL1502/25	15W	24V	3000K	1650lm	15°	D65	250
BE-PAL1502/50	15W	24V	3000K	1650lm	15°	D65	500
BE-PAL1502/75	15W	24V	3000K	1650lm	15°	D65	750

## Features 产品特点

### Aluminium Path Light

For outdoor / path / access / spot / landscape

LED: 15W  
Beam Angle: 15° / 24° / 38° / 60°  
Color Temperature: 2700K / 3000K / 4000K  
Finish: Matt Black Anodized  
IP rated: IP65

24VDC input, built-in IP68 junction box for wire connecting (Input wattage must be 2 times higher than the rated LED wattage to insure LED start-up)

3 year limited guarantee

### 铝制小路灯

适用于户外：庭院、花园等区域


LED: 15W  
光束角：15° / 24° / 38° / 60°  
色温：2700K / 3000K / 4000K  
颜色：氧化雾黑  
防护等级：IP65

输入电压：24VDC；内置IP68防水接线盒  
(注：因内置驱动启动电流要求较高，请保证电源功率高于灯具功率3倍)

3年有限整灯品质保证

Patent 专利 #: ZL 2015 2 0280930.7 / ZL 2015 3 0124478.0

## Optical Specification 配光曲线

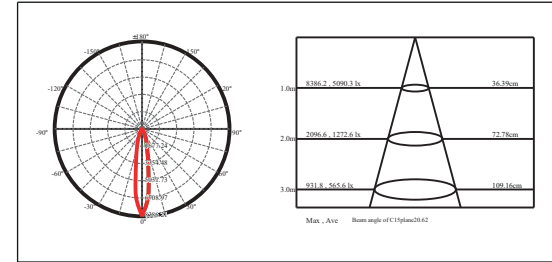


## Optical Accessories 可选配件

### Spike 地插



PAAS02



Unit: mm


### Anti-glare glass lens 光学配件



PAAG01F  
Frosted glass lens  
喷砂玻璃



PAAG01W  
Silk-screen glass lens  
丝印玻璃




Unit: mm

### Optional finish 可选颜色




MS  
Matt Silver  
氧化雾银


POST LIGHT 庭院灯

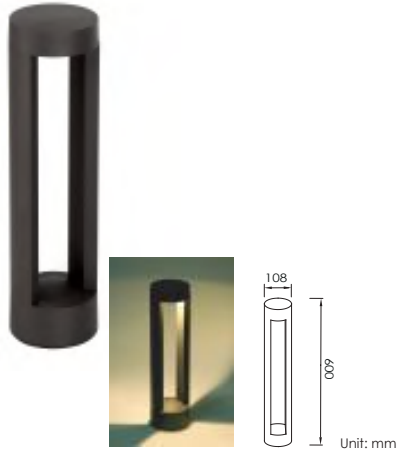


BE-POM0501

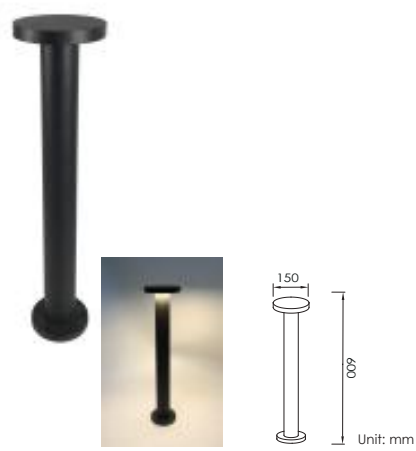

BE-POM1201

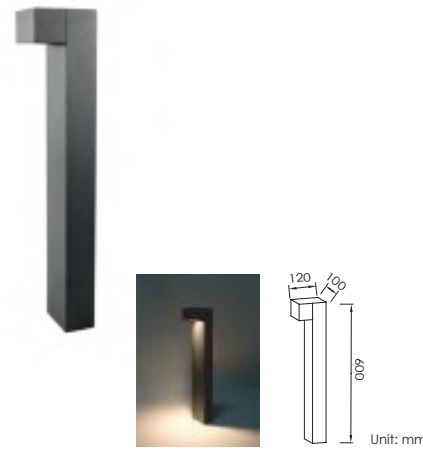

BE-POM0502

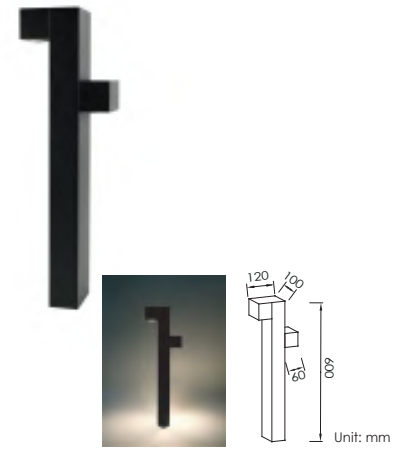

BE-POM0502D

Item number 产品型号	Watts 功率	Input Volt 输入电压	CCT 色温	LED Lumens 光通量	Diameter 直径	Height 高度
BE-POM0501	5W	220-240VAC	3000K	500lm	108	600
BE-POM1201	12W	220-240VAC	3000K	1200lm	150	600

Item number 产品型号	Watts 功率	Input Volt 输入电压	CCT 色温	LED Lumens 光通量	Cast 灯体尺寸	Height 高度
BE-POM0502	5W	220-240VAC	3000K	500lm	120x100	600
BE-POM0502D	2x5W	220-240VAC	3000K	2x500lm	120x100	600

● Features 产品特点

Main Voltage Aluminium Post Light  
For outdoor / path / access / landscape

LED: 5W / 12W  
Color Temperature: 2700K / 3000K / 4000K  
Finish: Powder Coated Black  
IP rated: IP65

220-240VAC input, supplied with driver

3 year limited guarantee

高压铝制庭院灯  
适用于户外：庭院、花园等区域

LED: 5W / 12W  
色温：2700K / 3000K / 4000K  
颜色：喷粉黑  
防护等级：IP65

输入电压：220-240VAC；内置驱动

3年有限整灯品质保证

● Features 产品特点

Main Voltage Aluminium Post Light  
For outdoor / path / access / landscape

LED: 5W / 2x5W  
Color Temperature: 2700K / 3000K / 4000K  
Finish: Powder Coated Black  
IP rated: IP65

220-240VAC input, supplied with driver


3 year limited guarantee

高压铝制庭院灯  
适用于户外：庭院、花园等区域

LED: 5W / 2x5W  
色温：2700K / 3000K / 4000K  
颜色：喷粉黑  
防护等级：IP65

输入电压：220-240VAC；内置驱动

3年有限整灯品质保证

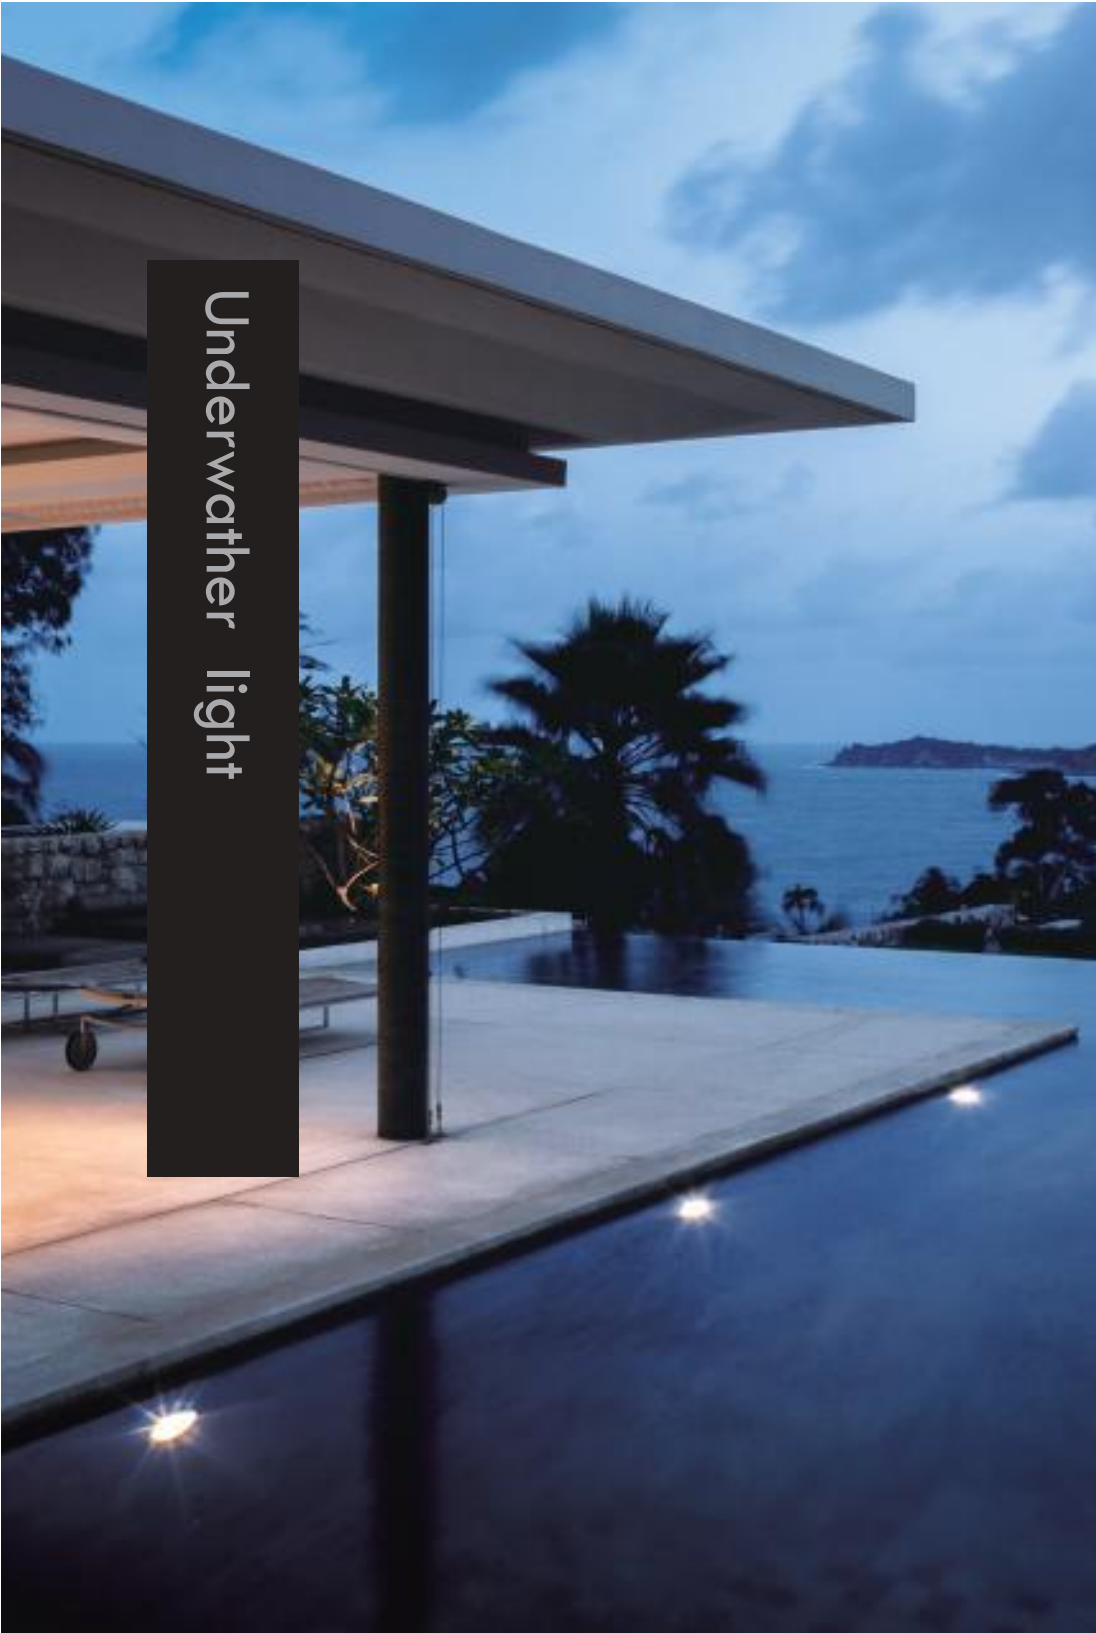

Underwater light

UNDER-  
WATER  
LIGHT

水下灯

V

## UNDERWATER LIGHT 水下灯



BE-UWL0112A

BE-UWL0112B

BE-UWL0112C

Unit: mm

Item number 产品型号	Watts 功率	Input Volt 输入电压	CCT 色温	LED Lumens 光通量	Beam Angle 光束角	Cut out 开孔尺寸	Recess 安装深度
BE-UWL0112A	1W	12/24V	3000K	120lm	25°	D30	60
BE-UWL0112B	1W	12/24V	3000K	120lm	25°	D30	60
BE-UWL0112C	1W	12/24V	3000K	120lm	25°	D30	60

## Features 产品特点

**Stainless Steel Underwater Light**  
For swimming pool / fountain / aquarium

LED: 1W  
Reduced Glare: Sunken light source  
Beam Angle: 25° / 40° / 60°  
Color Temperature: 2700K / 3000K / 4000K  
Finish: Satin 316 Stainless Steel  
IP rated: IP68  
Cut out: D30 (for deck mounting)

12/24VDC input, built-in DC driver with 2M of power cable

3 year limited guarantee

**不锈钢水下灯**  
适用于泳池、喷泉、水景等区域


LED: 1W  
光束角: 25° / 40° / 60°  
色温: 2700K / 3000K / 4000K  
颜色: 不锈钢316  
防护等级: IP68  
开孔尺寸: D30 (嵌入安装)

输入电压: 12 / 24VDC; 内置DC-DC驱动 · 自带配线长度2米

3年有限整灯品质保证

Patent 专利 #: ZL 2015 2 0276208.6

## Optical Specification 配光曲线

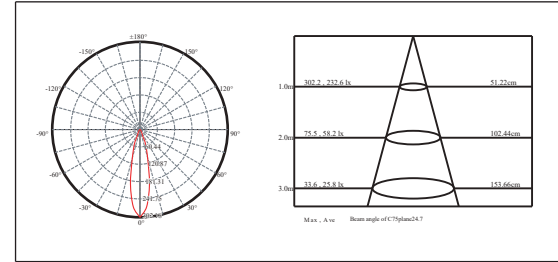


## Optical Accessories 可选配件

### Mounting sleeve 预埋件



WUAS05  
Cut out size: D33mm  
开孔尺寸: D33mm



Unit: mm

### IP68 junction box 防水接线盒




JB2001  
For single fixture installation  
单灯安装




JB3001  
For continuous fixtures installation  
连续安装


## UNDERWATER LIGHT 水下灯



BE-UWL0312A



BE-UWL0312B



BE-UWL0312C

Unit: mm

Item number 产品型号	Watts 功率	Input Volt 输入电压	CCT 色温	LED Lumens 光通量	Beam Angle 光束角	Cut out 开孔尺寸	Recess 安装深度
BE-UWL0312A	2W	12/24V	3000K	200lm	21°	D40	65
BE-UWL0312B	2W	12/24V	3000K	200lm	21°	D40	65
BE-UWL0312C	2W	12/24V	3000K	200lm	21°	D40	65

## Features 产品特点

**Stainless Steel Underwater Light**  
For swimming pool / fountain / aquarium

LED: 2W  
Reduced Glare: Sunken light source  
Beam Angle: 10° / 15° / 21° / 36° / 60°  
Color Temperature: 2700K / 3000K / 4000K  
Finish: Satin 316 Stainless Steel  
IP rated: IP68  
Cut out: D40 (for deck mounting)

12/24VDC input, built-in DC driver with 2M of power cable

3 year limited guarantee

**不锈钢水下灯**  
适用于泳池、喷泉、水景等区域


LED: 2W  
光束角: 10° / 15° / 21° / 36° / 60°  
色温: 2700K / 3000K / 4000K  
颜色: 不锈钢316  
防护等级: IP68  
开孔尺寸: D40 (嵌入安装)

输入电压: 12 / 24VDC; 内置DC-DC驱动·自带配线长度2米

3年有限整灯品质保证

Patent 专利 #: ZL 2015 2 0276208.6

## Optical Specification 配光曲线

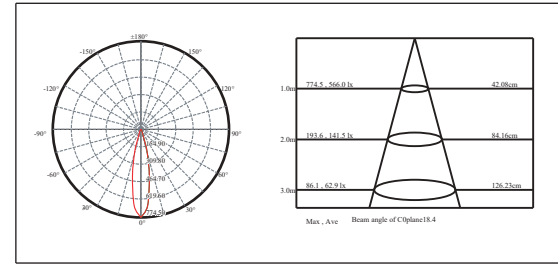


## Optical Accessories 可选配件

### Mounting sleeve 预埋件



STAS01  
Cut out size: D41mm  
开孔尺寸: D41mm



Unit: mm

### IP68 junction box 防水接线盒




JB2001  
For single fixture installation  
单灯安装




JB3001  
For continuous fixtures installation  
连续安装


## UNDERWATER LIGHT 水下灯



BE-UWL0712A



BE-UWL0712B



BE-UWL0712C

Unit: mm

Item number 产品型号	Watts 功率	Input Volt 输入电压	CCT 色温	LED Lumens 光通量	Beam Angle 光束角	Cut out 开孔尺寸	Recess 安装深度
BE-UWL0712A	7W	24V	3000K	750lm	38°	D65	110
BE-UWL0712B	7W	24V	3000K	750lm	38°	D65	110
BE-UWL0712C	7W	24V	3000K	750lm	38°	D65	110

## Features 产品特点

**Stainless Steel Underwater Light**  
For swimming pool / fountain / aquarium

LED: 7W  
Reduced Glare: Sunken light source  
Beam Angle: 15° / 25° / 38° / 60°  
Color Temperature: 2700K / 3000K / 4000K  
Finish: Satin 316 Stainless Steel  
IP rated: IP68  
Cut out: D65 (for deck mounting)

24VDC input, built-in DC driver with 2M of power cable

3 year limited guarantee

**不锈钢水下灯**  
适用于泳池、喷泉、水景等区域


LED: 7W  
光束角: 15° / 25° / 38° / 60°  
色温: 2700K / 3000K / 4000K  
颜色: 不锈钢316  
防护等级: IP68  
开孔尺寸: D65 (嵌入安装)

输入电压: 24VDC; 内置DC-DC驱动·自带配线长度2米

3年有限整灯品质保证

Patent 专利 #: ZL 2015 2 0276208.6

## Optical Specification 配光曲线

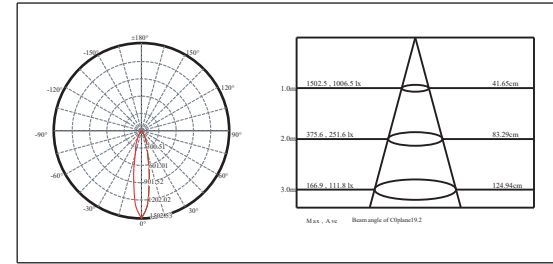


## Optical Accessories 可选配件

### Mounting sleeve 预埋件



WUAS02  
Cut out size: D71mm  
开孔尺寸: D71mm



Unit: mm

### IP68 junction box 防水接线盒



JB2001  
For single fixture installation  
单灯安装




JB3001  
For continuous fixtures installation  
连续安装

## UNDERWATER LIGHT 水下灯




BE-UWL0101A



Unit: mm



BE-UWL0101B



Unit: mm

Item number 产品型号	Watts 功率	Input Volt 输入电压	CCT 色温	LED Lumens 光通量	Beam Angle 光束角	Cut out 开孔尺寸	Recess 安装深度
BE-UWL0101A	1W	12/24V	3000K	120lm	21°	D40	60
BEUWL0101B	1W	12/24V	3000K	120lm	21°	D40	60

## Features 产品特点

**Stainless Steel Underwater Light**  
For swimming pool / fountain / aquarium

LED: 1W  
Beam Angle: 21° / 36°  
Color Temperature: 2700K / 3000K / 4000K  
Finish: Satin 316 Stainless Steel  
IP rated: IP68  
Cut out: D40 (for deck mounting)

12/24VDC input, built-in DC driver with 2M of power cable

3 year limited guarantee

**不锈钢水下灯**  
适用于泳池、喷泉、水景等区域


LED: 1W  
光束角: 21° / 36°  
色温: 2700K / 3000K / 4000K  
颜色: 不锈钢316  
防护等级: IP68  
开孔尺寸: D40 (嵌入安装)

输入电压: 12 / 24VDC; 内置DC-DC驱动, 自带配线长度2米

3年有限整灯品质保证

Patent 专利 #: ZL 2015 2 0276208.6

## Optical Specification 配光曲线

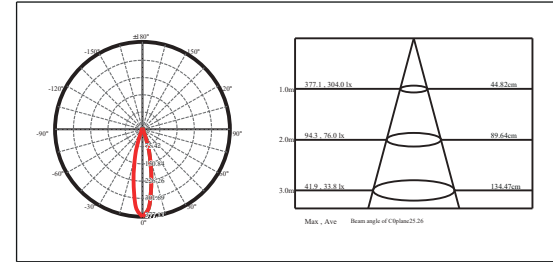


## Optical Accessories 可选配件

### Mounting sleeve 预埋件



STAS01  
Cut out size: D41mm  
开孔尺寸: D41mm



Unit: mm


### Anti-glare glass lens 光学配件



STAG01F  
Frosted glass lens  
喷砂玻璃



STAG01W  
Silk-screen glass lens  
丝印玻璃



Unit: mm

### IP68 junction box 防水接线盒




JB2001  
For single fixture installation  
单灯安装



JB3001  
For continuous fixtures installation  
连续安装



## UNDERWATER LIGHT 水下灯

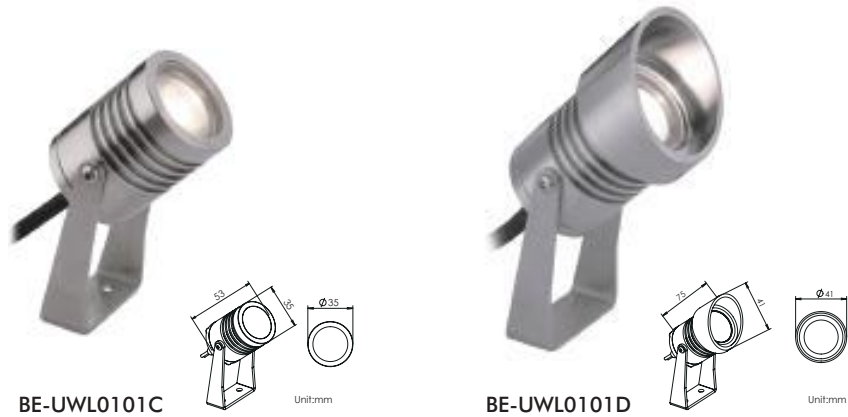

BE-UWL0101C

BE-UWL0101D

Item number 产品型号	Watts 功率	Input Volt 输入电压	CCT 色温	LED Lumens 光通量	Beam Angle 光束角	Cable length 电线长度
BE-UWL0101C	1W	12/24V	3000K	120lm	21°	2M
BE-UWL0101D	1W	12/24V	3000K	120lm	21°	2M

## Features 产品特点

### Stainless Steel Underwater Light For swimming pool / fountain / aquarium

LED: 1W  
Beam Angle: 21° / 36°  
Color Temperature: 2700K / 3000K / 4000K  
Finish: Satin 316 Stainless Steel  
IP rated: IP68  
Mounting Type: U bracket for solid ground; spike for soft ground

12/24VDC input, built-in DC driver with 2M of power cable

3 year limited guarantee

### 不锈钢水下灯 适用于泳池、喷泉、水景等区域


LED: 1W  
光束角: 21° / 36°  
色温: 2700K / 3000K / 4000K  
颜色: 不锈钢316  
防护等级: IP68  
安装方式: U形支架 / 地插

输入电压: 12 / 24VDC; 内置DC-DC驱动, 自带配线长度2米

3年有限整灯品质保证

Patent 专利 #: ZL 2015 2 0276208.6

## Optical Specification 配光曲线

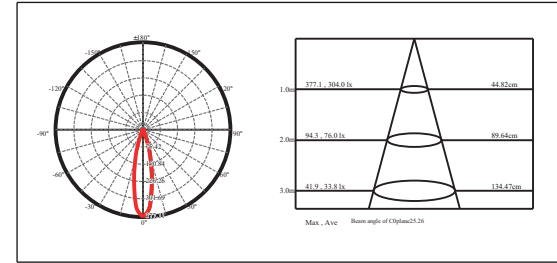

## Optical Accessories 可选配件

### Spike 地插



### Anti-glare glass lens 光学配件




### IP68 junction box 防水接线盒



## UNDERWATER LIGHT 水下灯




BE-UWL0102A



Unit: mm



BE-UWL0102B



Unit: mm

Item number 产品型号	Watts 功率	Input Volt 输入电压	CCT 色温	LED Lumens 光通量	Beam Angle 光束角	Cut out 开孔尺寸	Recess 安装深度
BE-UWL0102A	1W	12/24V	3000K	120lm	21°	D40	60
BE-UWL0102B	1W	12/24V	3000K	120lm	21°	D40	60

## Features 产品特点

**Stainless Steel Underwater Light**  
For swimming pool / fountain / aquarium

LED: 1W  
Beam Angle: 15° / 21° / 36° / 60°  
Color Temperature: 2700K / 3000K / 4000K  
Finish: Satin 316 Stainless Steel  
IP rated: IP68  
Cut out: D40 (for deck mounting)

12/24VDC input, built-in DC driver with 2M of power cable

3 year limited guarantee

**不锈钢水下灯**  
适用于泳池、喷泉、水景等区域


LED: 1W  
光束角: 15° / 21° / 36° / 60°  
色温: 2700K / 3000K / 4000K  
颜色: 不锈钢316  
防护等级: IP68  
开孔尺寸: D40 (嵌入安装)

输入电压: 12 / 24VDC; 内置DC-DC驱动, 自带配线长度2米

3年有限整灯品质保证

Patent 专利 #: ZL 2015 2 0276208.6

## Optical Specification 配光曲线

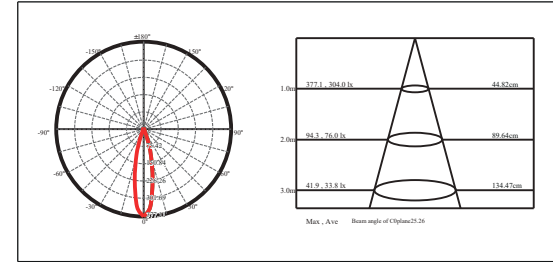


## Optical Accessories 可选配件

### Mounting sleeve 预埋件



STAS01  
Cut out size: D41mm  
开孔尺寸: D41mm



Unit: mm

### Anti-glare glass lens 光学配件




WUAG06L  
Linear glass lens  
横纹玻璃



WUAG06S  
Soften glass lens  
布纹玻璃



WUAH03  
Honeycomb louver  
蜂巢网片



Unit: mm

### IP68 junction box 防水接线盒




JB2001  
For single fixture installation  
单灯安装



JB3001  
For continuous fixtures installation  
连续安装

## UNDERWATER LIGHT 水下灯

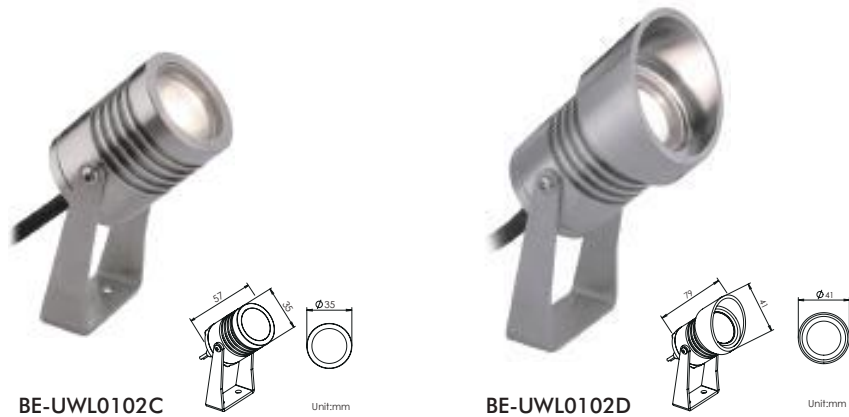

BE-UWL0102C

BE-UWL0102D

Item number 产品型号	Watts 功率	Input Volt 输入电压	CCT 色温	LED Lumens 光通量	Beam Angle 光束角	Cable length 电线长度
BE-UWL0102C	1W	12/24V	3000K	120lm	21°	2M
BE-UWL0102D	1W	12/24V	3000K	120lm	21°	2M

## Features 产品特点

**Stainless Steel Underwater Light**  
For swimming pool / fountain / aquarium

LED: 1W  
Beam Angle: 15° / 21° / 36° / 60°  
Color Temperature: 2700K / 3000K / 4000K  
Finish: Satin 316 Stainless Steel  
IP rated: IP68  
Mounting Type: U bracket for solid ground; spike for soft ground

12/24VDC input, built-in DC driver with 2M of power cable

3 year limited guarantee

**不锈钢水下灯**  
适用于泳池、喷泉、水景等区域


LED: 1W  
光束角: 15° / 21° / 36° / 60°  
色温: 2700K / 3000K / 4000K  
颜色: 不锈钢316  
防护等级: IP68  
安装方式: U形支架 / 地插

输入电压: 12 / 24VDC; 内置DC-DC驱动, 自带配线长度2米

3年有限整灯品质保证

Patent 专利 #: ZL 2015 2 0276208.6

## Optical Specification 配光曲线

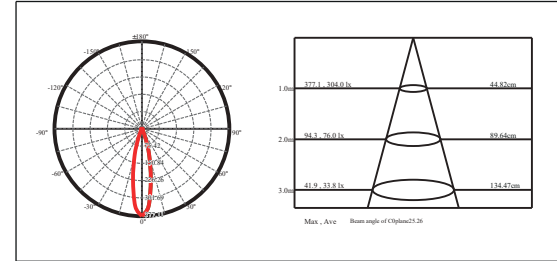

## Optical Accessories 可选配件

### Spike 地插



SPAS01

Unit: mm

### Anti-glare glass lens 光学配件



WUAG06L  
Linear glass lens  
横纹玻璃

WUAG06S  
Soften glass lens  
布纹玻璃

WUAH03  
Honeycomb louver  
蜂巢网片

Unit: mm

### IP68 junction box 防水接线盒




JB2001  
For single fixture installation  
单灯安装

JB3001  
For continuous fixtures installation  
连续安装


## UNDERWATER LIGHT 水下灯



BE-UWL0301A



BE-UWL0301B



Item number 产品型号	Watts 功率	Input Volt 输入电压	CCT 色温	LED Lumens 光通量	Beam Angle 光束角	Cut out 开孔尺寸	Recess 安装深度
BE-UWL0301A	3W	12/24V	3000K	250lm	20°	D51	80
BE-UWL0301B	3W	12/24V	3000K	250lm	20°	D51	80

## Features 产品特点

**Stainless Steel Underwater Light**  
For swimming pool / fountain / aquarium

LED: 3W  
Beam Angle: 20° / 40° / 60°  
Color Temperature: 2700K / 3000K / 4000K  
Finish: Satin 316 Stainless Steel  
IP rated: IP68  
Cut out: D51 (for deck mounting)

12/24VDC input, built-in DC driver with 2M of power cable

3 year limited guarantee

**不锈钢水下灯**  
适用于泳池、喷泉、水景等区域


LED: 3W  
光束角: 20° / 40° / 60°  
色温: 2700K / 3000K / 4000K  
颜色: 不锈钢316  
防护等级: IP68  
开孔尺寸: D51 (嵌入安装)

输入电压: 12 / 24VDC; 内置DC-DC驱动, 自带配线长度2米

3年有限整灯品质保证

Patent 专利 #: ZL 2015 2 0276208.6

## Optical Specification 配光曲线

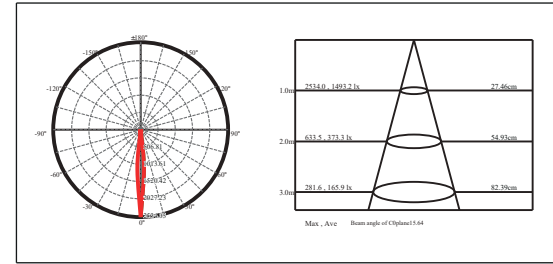


## Optical Accessories 可选配件

### Mounting sleeve 预埋件



WUAS01  
Cut out size: D60mm  
开孔尺寸: D60mm



Unit: mm


### Anti-glare glass lens 光学配件



WUAG01F  
Frosted glass lens  
磨砂玻璃



WUAG01W  
Silk-screen glass lens  
丝印玻璃



Unit: mm

### IP68 junction box 防水接线盒




JB2001  
For single fixture installation  
单灯安装



JB3001  
For continuous fixtures installation  
连续安装

## UNDERWATER LIGHT 水下灯

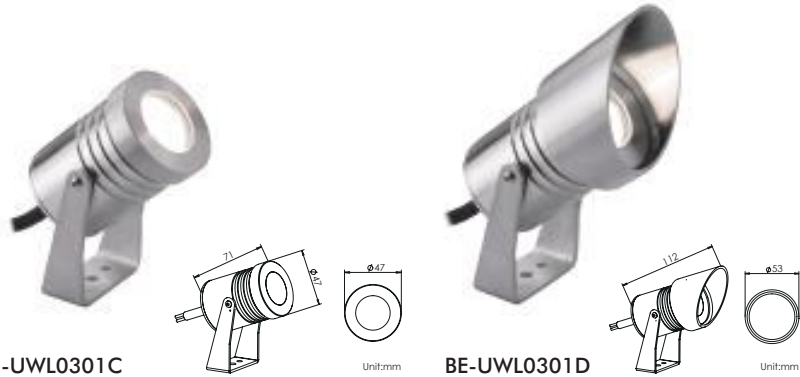

BE-UWL0301C

Unit:mm

BE-UWL0301D

Unit:mm

Item number 产品型号	Watts 功率	Input Volt 输入电压	CCT 色温	LED Lumens 光通量	Beam Angle 光束角	Cable length 电线长度
BE-UWL0301C	3W	12/24V	3000K	250lm	20°	2M
BE-UWL0301D	3W	12/24V	3000K	250lm	20°	2M

## Features 产品特点

**Stainless Steel Underwater Light**  
For swimming pool / fountain / aquarium

LED: 3W  
Beam Angle: 20° / 40° / 60°  
Color Temperature: 2700K / 3000K / 4000K  
Finish: Satin 316 Stainless Steel  
IP rated: IP68  
Mounting Type: U bracket for solid ground; spike for soft ground

12/24VDC input, built-in DC driver with 2M of power cable

3 year limited guarantee

**不锈钢水下灯**  
适用于泳池、喷泉、水景等区域


LED: 3W  
光束角: 20° / 40° / 60°  
色温: 2700K / 3000K / 4000K  
颜色: 不锈钢316  
防护等级: IP68  
安装方式: U形支架 / 地插

输入电压: 12 / 24VDC; 内置DC-DC驱动, 自带配线长度2米

3年有限整灯品质保证

Patent 专利 #: ZL 2015 2 0276208.6

## Optical Specification 配光曲线

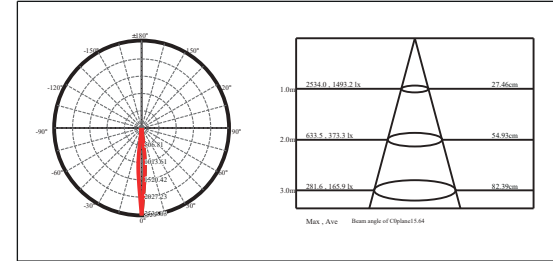

## Optical Accessories 可选配件

### Spike 地插



SPAS01

Unit: mm

### Anti-glare glass lens 光学配件



WUAG01F  
Frosted glass lens  
喷砂玻璃

WUAG01W  
Silk-screen glass lens  
丝印玻璃

Unit:mm


### IP68 junction box 防水接线盒



JB2001  
For single fixture installation  
单灯安装

JB3001  
For continuous fixtures installation  
连续安装

## UNDERWATER LIGHT 水下灯

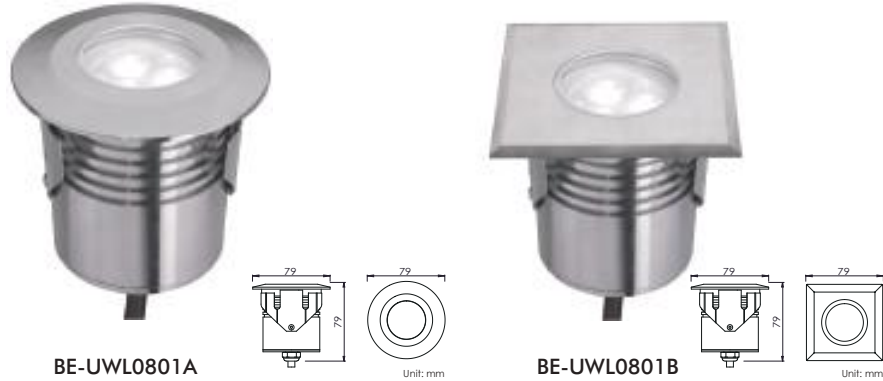

Item number 产品型号	Watts 功率	Input Volt 输入电压	CCT 色温	LED Lumens 光通量	Cut out 开孔尺寸	Recess 安装深度
BE-UWL0801C	8W	12/24V	3000K	750lm	D65	85
BE-UWL0801D	8W	12/24V	3000K	750lm	D65	85

## Features 产品特点

**Stainless Steel Underwater Light**  
For swimming pool / fountain / aquarium

LED: 8W  
Beam Angle: 25° / 40° / 60°  
Color Temperature: 2700K / 3000K / 4000K  
Finish: Satin 316 Stainless Steel  
IP rated: IP68  
Cut out: D65 (for deck mounting)

12/24VDC input, built-in DC driver with 2M of power cable

3 year limited guarantee

**不锈钢水下灯**  
适用于泳池、喷泉、水景等区域


LED: 8W  
光束角: 25° / 40° / 60°  
色温: 2700K / 3000K / 4000K  
颜色: 不锈钢316  
防护等级: IP68  
开孔尺寸: D65 (嵌入安装)

输入电压: 12 / 24VDC; 内置DC-DC驱动, 自带配线长度2米

3年有限整灯品质保证


Patent 专利 #: ZL 2015 2 0276208.6

## Optical Specification 配光曲线

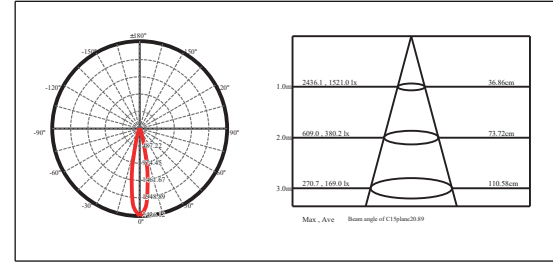

## Optical Accessories 可选配件

### Mounting sleeve 预埋件

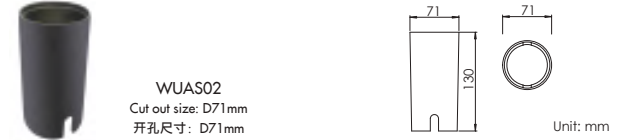

### Anti-glare glass lens 光学配件




### IP68 junction box 防水接线盒



## UNDERWATER LIGHT 水下灯




BE-UWL0801C



Unit:mm



BE-UWL0801D



Unit:mm

Item number 产品型号	Watts 功率	Input Volt 输入电压	CCT 色温	LED Lumens 光通量	Beam Angle 光束角	Cable length 电线长度
BE-UWL0801C	8W	12/24V	3000K	750lm	25°	2M
BE-UWL0801D	8W	12/24V	3000K	750lm	25°	2M

## Features 产品特点

**Stainless Steel Underwater Light**  
For swimming pool / fountain / aquarium

LED: 8W  
Beam Angle: 25° / 40° / 60°  
Color Temperature: 2700K / 3000K / 4000K  
Finish: Satin 316 Stainless Steel  
IP rated: IP68  
Mounting Type: U bracket for solid ground; spike for soft ground

12/24VDC input, built-in DC driver with 2M of power cable

3 year limited guarantee

**不锈钢水下灯**  
适用于泳池、喷泉、水景等区域


LED: 8W  
光束角: 25° / 40° / 60°  
色温: 2700K / 3000K / 4000K  
颜色: 不锈钢316  
防护等级: IP68  
安装方式: U形支架 / 地插

输入电压: 12 / 24VDC; 内置DC-DC驱动, 自带配线长度2米

3年有限整灯品质保证

Patent 专利 #: ZL 2015 2 0276208.6

## Optical Specification 配光曲线

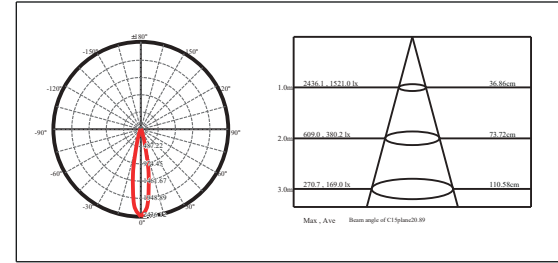


## Optical Accessories 可选配件

### Spike 地插



SPAS01



Unit: mm


### Anti-glare glass lens 光学配件



WUAG02F  
Frosted glass lens  
喷砂玻璃



WUAG02W  
Silk-screen glass lens  
丝印玻璃



Unit: mm

### IP68 junction box 防水接线盒



JB2001  
For single fixture installation  
单灯安装



JB3001  
For continuous fixtures installation  
连续安装



Wall light

WALL  
LIGHT

VI

壁 灯




## WALL LIGHT 壁灯




WLM0501A



WLM0901A

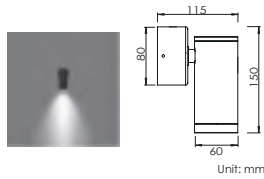

Unit: mm



Unit: mm

Item number 产品型号	Watts 功率	Input Volt 输入电压	CCT 色温	LED Lumens 光通量	Beam Angle 光束角
WLM0501A	5W	220-240VAC	3000K	550lm	25°
WLM0901A	9W	220-240VAC	3000K	1050lm	24°

## Features 产品特点

Aluminium Wall Light  
For outdoor / indoor / spot / wall

LED: 5W / 9W  
Beam Angle: 5W (15° / 25° / 38° / 60°); 9W (15° / 24° / 38° / 60°)  
Color Temperature: 2700K / 3000K / 4000K  
Finish: Matt Black Anodized  
IP rated: IP65  
Mounting Type: Surface mounting

220-240VAC input, supplied with driver

3 year limited guarantee

铝制壁灯  
适用于走道、外墙、廊柱等区域


LED: 5W / 9W  
光束角: 5W (15° / 25° / 38° / 60°); 9W (15° / 24° / 38° / 60°)  
色温: 2700K / 3000K / 4000K  
颜色: 氧化雾黑  
防护等级: IP65  
安装方式: 表面安装

输入电压: 220-240VAC; 内置驱动

3年有限整灯品质保证

Patent 专利 #: ZL 2015 2 0276208.6

## Optical Specification 配光曲线

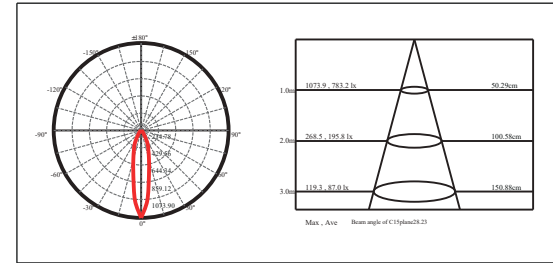

## Optical Accessories 可选配件

### Anti-glare glass lens 光学配件




WUAG02L(for 5W)  
DLAG01L(for 9W)  
Linear glass lens  
横纹玻璃



WUAG02S(for 5W)  
DLAG01S(for 9W)  
Soft glass lens  
布纹玻璃

Ø44 (for 5W)  
Ø50 (for 9W)



Unit: mm




WUAH02(for 5W)  
DLAH01(for 9W)  
Honeycomb louver  
蜂巢网片


## WALL LIGHT 壁灯



WLM0502  
WLM0802



WLM1502  
WLM2002



Item number 产品型号	Watts 功率	Input Volt 输入电压	CCT 色温	LED Lumens 光通量	Beam Angle 光束角
WLM0502A	5W	220-240VAC	3000K	550lm	36°
WLM0502D	2x5W	220-240VAC	3000K	2x550lm	36°
WLM0802A	8W	220-240VAC	3000K	950lm	36°
WLM0802D	2x8W	220-240VAC	3000K	2x950lm	36°
WLM1502A	15W	220-240VAC	3000K	1650lm	36°
WLM1502D	2x15W	220-240VAC	3000K	2x1650lm	36°
WLM2002A	20W	220-240VAC	3000K	2250lm	36°
WLM2002D	2x20W	220-240VAC	3000K	2x2250lm	36°

### Features 产品特点

#### Aluminium Wall Light

For outdoor / indoor / spot / wall

LED: 5W / 8W / 15W / 20W  
Beam Angle: 12° / 24° / 36° / 60°  
Color Temperature: 2700K / 3000K / 4000K  
Finish: Powder Coated Black  
IP rated: IP65  
Mounting Type: Surface mounting

220-240VAC input, supplied with driver

3 year limited guarantee

#### 铝制壁灯

适用于走廊、外墙、廊柱等区域


LED: 5W / 8W / 15W / 20W  
光束角: 12° / 24° / 36° / 60°  
色温: 2700K / 3000K / 4000K  
颜色: 喷粉黑  
防护等级: IP65  
安装方式: 表面安装

输入电压: 220-240VAC; 内置驱动


3年有限整灯品质保证




WLM0503  
WLM0803



WLM1503  
WLM2003



WLM0504  
WLM0804



Item number 产品型号	Watts 功率	Input Volt 输入电压	CCT 色温	LED Lumens 光通量	Beam Angle 光束角
WLM0503A	5W	220-240VAC	3000K	550lm	36°
WLM0503D	2x5W	220-240VAC	3000K	2x550lm	36°
WLM0803A	8W	220-240VAC	3000K	950lm	36°
WLM0803D	2x8W	220-240VAC	3000K	2x950lm	36°
WLM1503A	15W	220-240VAC	3000K	1650lm	36°
WLM1503D	2x15W	220-240VAC	3000K	2x1650lm	36°
WLM2003A	20W	220-240VAC	3000K	2250lm	36°
WLM2003D	2x20W	220-240VAC	3000K	2x2250lm	36°
WLM0504A	5W	220-240VAC	3000K	550lm	36°
WLM0504D	2x5W	220-240VAC	3000K	2x550lm	36°
WLM0804A	8W	220-240VAC	3000K	950lm	36°
WLM0804D	2x8W	220-240VAC	3000K	2x950lm	36°

### Features 产品特点

#### Aluminium Wall Light

For outdoor / indoor / spot / wall

LED: 5W / 8W / 15W / 20W  
Beam Angle: 12° / 24° / 36° / 60°  
Color Temperature: 2700K / 3000K / 4000K  
Finish: Powder Coated Black  
IP rated: IP65  
Mounting Type: Surface mounting

220-240VAC input, supplied with driver

3 year limited guarantee

#### 铝制壁灯

适用于走廊、外墙、廊柱等区域

LED: 5W / 8W / 15W / 20W  
光束角: 12° / 24° / 36° / 60°  
色温: 2700K / 3000K / 4000K  
颜色: 喷粉黑  
防护等级: IP65  
安装方式: 表面安装

输入电压: 220-240VAC; 内置驱动

3年有限整灯品质保证

Down light



DOWN  
LIGHT


VII

筒灯


## DOWN LIGHT 筒灯



BE-DLL0901



BE-DLL1501



Item number 产品型号	Watts 功率	Input Volt 输入电压	CCT 色温	LED Lumens 光通量	Beam Angle 光束角
BE-DLL0901	9W	12/24V	3000K	1050lm	38°
BE-DLL1501	15W	24V	3000K	2000lm	36°

## Features 产品特点

### Aluminium Down Light

For outdoor ceiling / hallway / eaves

LED: 9W / 15W

Reduced Glare: Sunken light source

Beam Angle: 9W (20° / 38°); 15W (16° / 24° / 36°)

Color Temperature: 2700K / 3000K / 4000K

Finish: Matt Black Anodized

IP rated: IP65

Mounting Type: Surface mounting

9W 12/24VDC, 15W 24VDC input, built-in DC driver

(Input wattage must be 2 times higher than the rated LED wattage to insure LED start-up)

3 year limited guarantee

### 铝制筒灯

适用于户外：走廊、屋檐、露台等区域

LED: 9W / 15W

光束角：9W (20° / 38°); 15W (16° / 24° / 36°)

色温：2700K / 3000K / 4000K

颜色：氧化雾黑

防护等级：IP65


安装方式：吸顶安装

输入电压：9W：12 / 24VDC；15W：24VDC；内置DC-DC驱动

(注：因内置驱动启动电流要求较高，请保证电源功率高于灯具功率3倍)

3年有限整灯品质保证

## Optical Specification 配光曲线

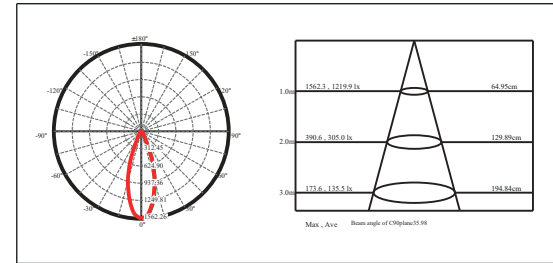

## Optical Accessories 可选配件

### Anti-glare glass lens 光学配件



DLAG01L(for 9W)  
DLAG02L(for 15W)  
Linear glass lens  
横纹玻璃



DLAG01S(for 9W)  
DLAG02S(for 15W)  
Soft glass lens  
布纹玻璃

Ø50 (for 9W)  
Ø69 (for 15W)



Unit: mm



DLAH01(for 9W)  
DLAH02(for 15W)  
Honeycomb louver  
蜂巢网片

## DOWN LIGHT 筒灯



Unit: mm

Item number 产品型号	Watts 功率	Input Volt 输入电压	CCT 色温	LED Lumens 光通量	Beam Angle 光束角
BE-DLM0501	5W	220-240VAC	3000K	550lm	36°
BE-DLM0901	9W	220-240VAC	3000K	1050lm	38°
BE-DLM1501	15W	220-240VAC	3000K	2000lm	36°

## Features 产品特点

### Aluminium Down Light

For outdoor ceiling / hallway / eaves

LED: 5W / 9W / 15W  
 Reduced Glare: Sunken light source  
 Beam Angle: 5W / 15W (16° / 24° / 36°)  
 9W (15° / 24° / 38° / 60°)  
 Color Temperature: 2700K / 3000K / 4000K  
 Finish: Matt Black Anodized  
 IP rated: IP65  
 Mounting Type: Surface mounting

220-240VAC input, supplied with driver

3 year limited guarantee

### 铝制筒灯


适用于户外：走廊、屋檐、露台等区域

LED: 5W / 9W / 15W  
 光束角：5W / 15W (16° / 24° / 36°);  
 9W (15° / 24° / 38° / 60°)  
 色温：2700K / 3000K / 4000K  
 颜色：氧化雾黑  
 防护等级：IP65  
 安装方式：吸顶安装

输入电压：220-240VAC; 内置驱动

3年有限整灯品质保证

## Optical Specification 配光曲线

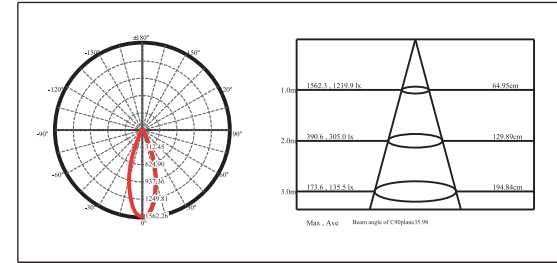

## Optical Accessories 可选配件

### Anti-glare glass lens 光学配件



DLAH01 (for 9W)  
DLAH02 (for 5W/15W)  
Honeycomb louver  
蜂巢网片

## PENDANT LIGHT 吊线灯



BE-PEM1501A

BE-PEM1501B

Item number 产品型号	Watts 功率	Input Volt 输入电压	CCT 色温	LED Lumens 光通量	Beam Angle 光束角
BE-PEM1501A	15W	220-240VAC	3000K	2000lm	36°
BE-PEM1501B	15W	220-240VAC	3000K	2000lm	36°

## Features 产品特点

**Aluminium Pendant Light**  
For outdoor ceiling / hallway / eaves

LED: 15W  
Reduced Glare: Sunken light source  
Beam Angle: 16° / 24° / 36°  
Color Temperature: 2700K / 3000K / 4000K  
Finish: Matt Black Anodized  
IP rated: IP65  
Mounting Type: Pendant

220-240VAC input, supplied with driver

3 year limited guarantee

**铝制吊线灯**  
适用于户外：走廊、屋檐、露台等区域


LED: 15W  
光束角: 16° / 24° / 36°  
色温: 2700K / 3000K / 4000K  
颜色: 氧化雾黑  
防护等级: IP65  
安装方式: 吸顶安装

输入电压: 220-240VAC; 内置驱动

3年有限整灯品质保证

Patent 专利 #: ZL 2015 2 0276208.6

## Optical Specification 配光曲线

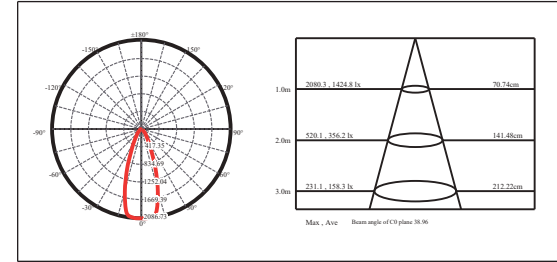

## Optical Accessories 可选配件


### Anti-glare glass lens 光学配件




DLAG02L  
Linear glass lens  
横纹玻璃



DLAG02S  
Soften glass lens  
布纹玻璃




DLAH02  
Honeycomb louver  
蜂巢网片




Unit: mm

## DOWN LIGHT 筒灯



BE-DLM0702/BE-DLM0902

Item number 产品型号	Watts 功率	Input Volt 输入电压	CCT 色温	LED Lumens 光通量	Beam Angle 光束角
BE-DLM0702	7W	220-240VAC	3000K	750lm	36°
BE-DLM0902	9W	220-240VAC	3000K	1050lm	36°



BE-DLM1502/BE-DLM2002

Item number 产品型号	Watts 功率	Input Volt 输入电压	CCT 色温	LED Lumens 光通量	Beam Angle 光束角
BE-DLM1502	15W	220-240VAC	3000K	1650lm	36°
BE-DLM2002	20W	220-240VAC	3000K	2250lm	36°

### Features 产品特点

#### Aluminium Down Light

For outdoor ceiling / hallway / eaves

LED: 7W / 9W  
Reduced Glare: Sunken light source  
Beam Angle: 16° / 24° / 36°  
Color Temperature: 2700K / 3000K / 4000K  
Finish: Matt Black Anodized  
IP rated: IP65  
Mounting Type: Surface mounting

220-240VAC input, supplied with driver

3 year limited guarantee

Patent 专利 #: ZL 2015 2 0276208.6

#### 铝制筒灯

适用于户外：走廊、屋檐、露台等区域

LED: 7W / 9W  
光束角: 16° / 24° / 36°  
色温: 2700K / 3000K / 4000K  
颜色: 氧化雾黑  
防护等级: IP65  
安装方式: 吸顶安装

输入电压: 220-240VAC; 内置驱动

3年有限整灯品质保证

### Features 产品特点

#### Aluminium Down Light

For outdoor ceiling / hallway / eaves

LED: 15W / 20W  
Reduced Glare: Sunken light source  
Beam Angle: 16° / 24° / 36°  
Color Temperature: 2700K / 3000K / 4000K  
Finish: Matt Black Anodized  
IP rated: IP65  
Mounting Type: Surface mounting

220-240VAC input, supplied with driver

3 year limited guarantee

Patent 专利 #: ZL 2015 2 0276208.6

#### 铝制筒灯


适用于户外：走廊、屋檐、露台等区域

LED: 15W / 20W  
光束角: 16° / 24° / 36°  
色温: 2700K / 3000K / 4000K  
颜色: 氧化雾黑  
防护等级: IP65  
安装方式: 吸顶安装

输入电压: 220-240VAC; 内置驱动

3年有限整灯品质保证

## DOWN LIGHT 筒灯



BE-DLM2502/BE-DLM3002

Item number 产品型号	Watts 功率	Input Volt 输入电压	CCT 色温	LED Lumens 光通量	Beam Angle 光束角
BE-DLM2502	25W	220-240VAC	3000K	3000lm	36°
BE-DLM3002	30W	220-240VAC	3000K	3600lm	36°

### Features 产品特点

#### Aluminium Down Light

For outdoor ceiling / hallway / eaves

LED: 25W / 30W  
Reduced Glare: Sunken light source  
Beam Angle: 16° / 24° / 36°  
Color Temperature: 2700K / 3000K / 4000K  
Finish: Matt Black Anodized  
IP rated: IP65  
Mounting Type: Surface mounting

220-240VAC input, supplied with driver

3 year limited guarantee

Patent 专利 #: ZL 2015 2 0276208.6


#### 铝制筒灯

适用于户外：走廊、屋檐、露台等区域

LED: 25W / 30W  
光束角: 16° / 24° / 36°  
色温: 2700K / 3000K / 4000K  
颜色: 氧化雾黑  
防护等级: IP65  
安装方式: 吸顶安装

输入电压: 220-240VAC; 内置驱动

3年有限整灯品质保证



BE-DLM4002/BE-DLM4502

Item number 产品型号	Watts 功率	Input Volt 输入电压	CCT 色温	LED Lumens 光通量	Beam Angle 光束角
BE-DLM4002	40W	220-240VAC	3000K	4800lm	36°
BE-DLM4502	45W	220-240VAC	3000K	5500lm	36°

### Features 产品特点

#### Aluminium Down Light

For outdoor ceiling / hallway / eaves

LED: 40W / 45W  
Reduced Glare: Sunken light source  
Beam Angle: 16° / 24° / 36°  
Color Temperature: 2700K / 3000K / 4000K  
Finish: Matt Black Anodized  
IP rated: IP65  
Mounting Type: Surface mounting

220-240VAC input, supplied with driver

3 year limited guarantee

Patent 专利 #: ZL 2015 2 0276208.6

#### 铝制筒灯

适用于户外：走廊、屋檐、露台等区域

LED: 40W / 45W  
光束角: 16° / 24° / 36°  
色温: 2700K / 3000K / 4000K  
颜色: 氧化雾黑  
防护等级: IP65  
安装方式: 吸顶安装

输入电压: 220-240VAC; 内置驱动

3年有限整灯品质保证



Accessory



ACCESSORY

配件



## JUNCTION BOX 防水接线盒



JB1001M  
JB1001

JB2001

JB3001


JB2002

JB3002

 **CE** IP68

Item number 产品型号	Material 材料	Spec 产品规格	Volt/Current 电压/电流	IP Rated 防护等级	Cable Range 适配线径	Size(mm) 尺寸
B1001M	PA66	3 pin/ 2 way	240V/ 16A	IP68 2 meters	3-10mm	D24x70
JB1001	PA66	3 pin/ 2 way	240V/ 16A	IP68 2 meters	5-10mm	D24x70
JB2001	PA66	3 pin/ 2 way	240V/ 20A	IP68 2 meters	5-12mm	D33x90.5
JB3001	PA66	3 pin/3 way	240V/ 20A	IP68 2 meters	5-12mm	D30x90x83.5
JB2002	PA66	5 pin/ 2 way	240V/ 20A	IP68 2 meters	5-12mm	D33x116.5
JB3002	PA66+PC	5 pin/ 3 way	240V/20A	IP68 2 meters	5-12mm	72x129x36

## WATERPROOF CABLE CONNECTOR 防水接线器



Item number 产品型号	Material 材料	Voltage 电压	IP Rated 防护等级	Cable Range 适配线径
BE-WCC001	PA66	600V	IP68	22-12AWG

## SPECIAL COVER 订制面盖

